




REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	蒋建银	2018.01.18

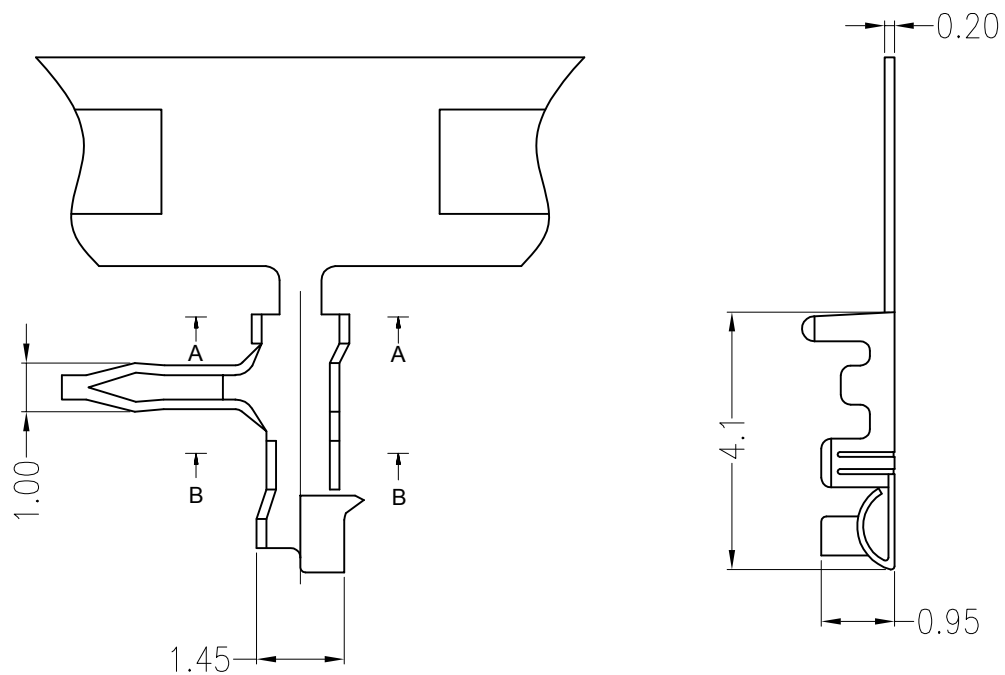

Ordering Information & Specification:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
B1502T-PA	AWG #26~#30	0.7~1.1mm	Phosphor bronze	Tin-plated	/

 东莞市高迪电子有限公司 DONG GUAN GAO DI ELECTRONICS CO., LTD				TITLE:	
X.±0.5	X.±5'	USE:	PART NO.:		
.X±0.3	.X±2'	CUSTOMER	B1502T		
.XX±0.25	.XX±1'	APPD:	DWG NO.:		
--	--	邵敬和	GCDZ-0046		
		CHKD:			
		田 峰			
		UNITS:	SCALE		SHEET
		mm	1 : 1		1 / 1
		DR:	蒋建银		

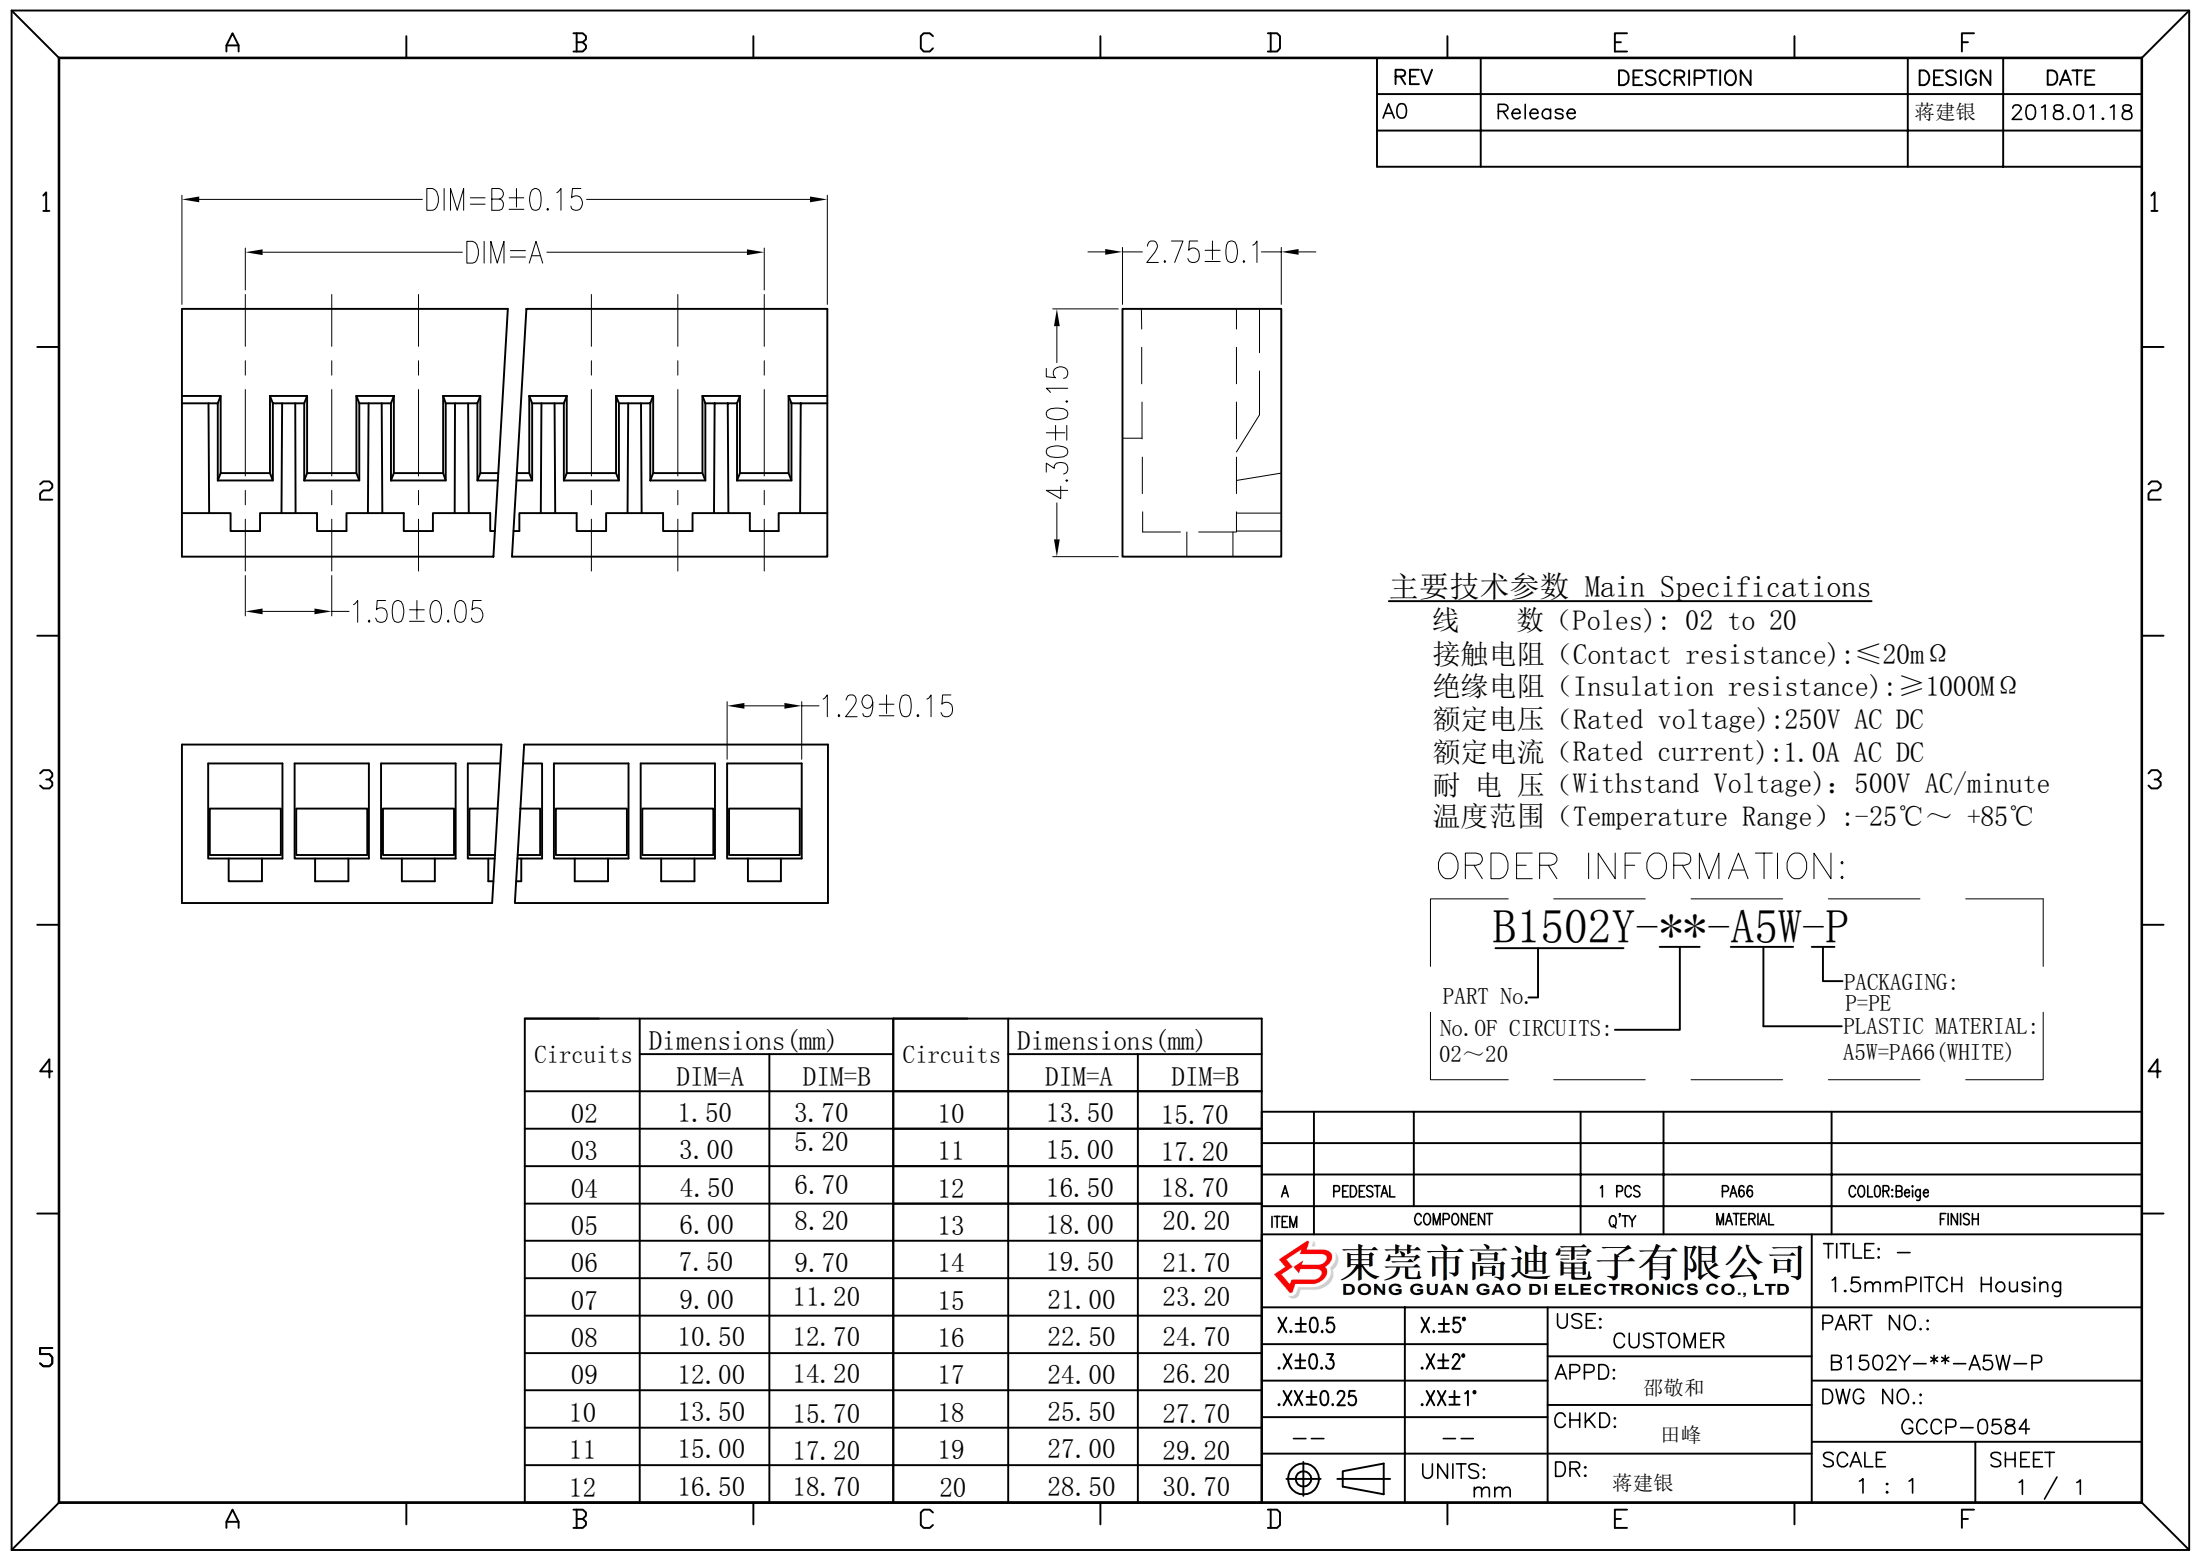

REV	DESCRIPTION	DESIGN	DATE
A0	Release	蒋建银	2018.01.18


主要技术参数 Main Specifications

线 数 (Poles): 02 to 20
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$
额定电压 (Rated voltage): 250V AC DC
额定电流 (Rated current): 1.0A AC DC
耐 电 压 (Withstand Voltage): 500V AC/minute
温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

ORDER INFORMATION:

B1502Y-**-A5W-P	
PART No.	PACKAGING:
No. OF CIRCUITS:	P=PE
02~20	PLASTIC MATERIAL:
	A5W=PA66 (WHITE)

Circuits	Dimensions (mm)		Circuits	Dimensions (mm)	
	DIM=A	DIM=B		DIM=A	DIM=B
02	1.50	3.70	10	13.50	15.70
03	3.00	5.20	11	15.00	17.20
04	4.50	6.70	12	16.50	18.70
05	6.00	8.20	13	18.00	20.20
06	7.50	9.70	14	19.50	21.70
07	9.00	11.20	15	21.00	23.20
08	10.50	12.70	16	22.50	24.70
09	12.00	14.20	17	24.00	26.20
10	13.50	15.70	18	25.50	27.70
11	15.00	17.20	19	27.00	29.20
12	16.50	18.70	20	28.50	30.70

A	PEDESTAL		1 PCS	PA66	COLOR:Beige
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
 東莞市高迪電子有限公司 DONG GUAN GAO DI ELECTRONICS CO., LTD				TITLE: - 1.5mmPITCH Housing	
X.±0.5		X.±5'	USE: CUSTOMER		PART NO.:
.X±0.3		.X±2'	APPD: 邵敬和		B1502Y-**-A5W-P
.XX±0.25		.XX±1'	CHKD: 田峰		DWG NO.:
--		--			GCCP-0584
		UNITS: mm	DR: 蒋建银		SCALE 1 : 1
					SHEET 1 / 1