
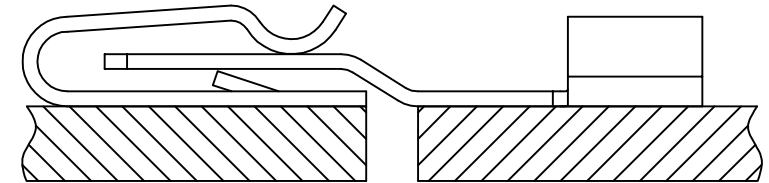


REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.04.30

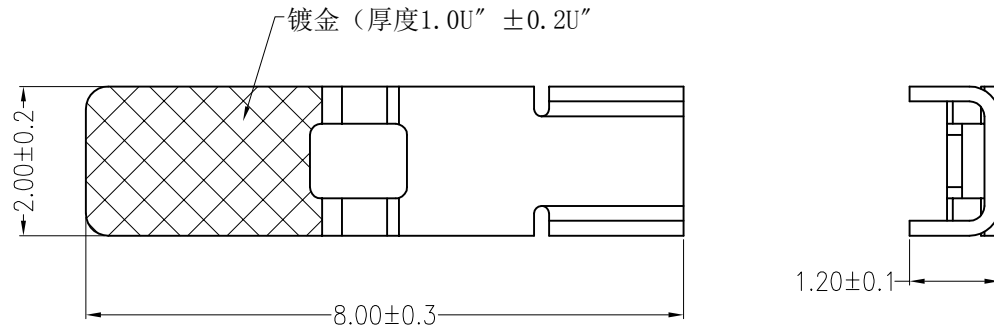



Assembly Layout

主要技术参数 Main Specifications

线数 (Poles): 01
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 800\text{M}\Omega$
额定电压 (Rated voltage): 250 V AC DC
额定电流 (Rated current): 3.0A AC DC
耐电压 (Withstand Voltage): 1500V AC/minute
温度范围 (Temperature Range): $-45^{\circ}\text{C} \sim +125^{\circ}\text{C}$


ORDER INFORMATION:


L059A-01-T2CE-R	
PART No.	PACKAGING:
No. FOR CIRCUITS:	R=REEL
01	
PLASTIC MATERIAL:	PLATING:
T2C=PBR (BEIGE)	E=Gold+Sn

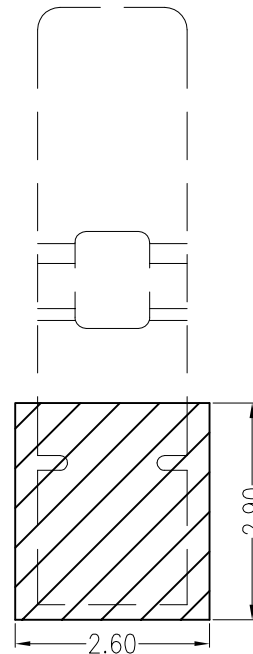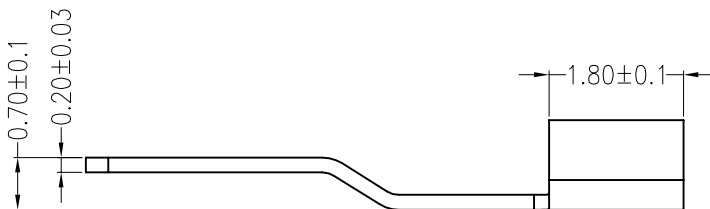

Board Layout

General Tolerance: ± 0.05

C					
B					
A	CONTACT		1 PCS	PhosphorBronze	Gold+Sn-plated
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
 东莞市高迪电子有限公司 DONG GUAN GAO DI ELECTRONICS CO., LTD				TITLE: -	
X.±0.5		X.±5°		USE: CUSTOMER	PART NO.:
.X±0.3		.X±2°			L059A-01-T2CE-R
.XX±0.25		.XX±1°		APPD: 邵敬和	DWG NO.:
--		--			GCCP-0206
		UNITS: mm		DR: 蒋建银	SCALE 1 : 1
					SHEET 1 / 1

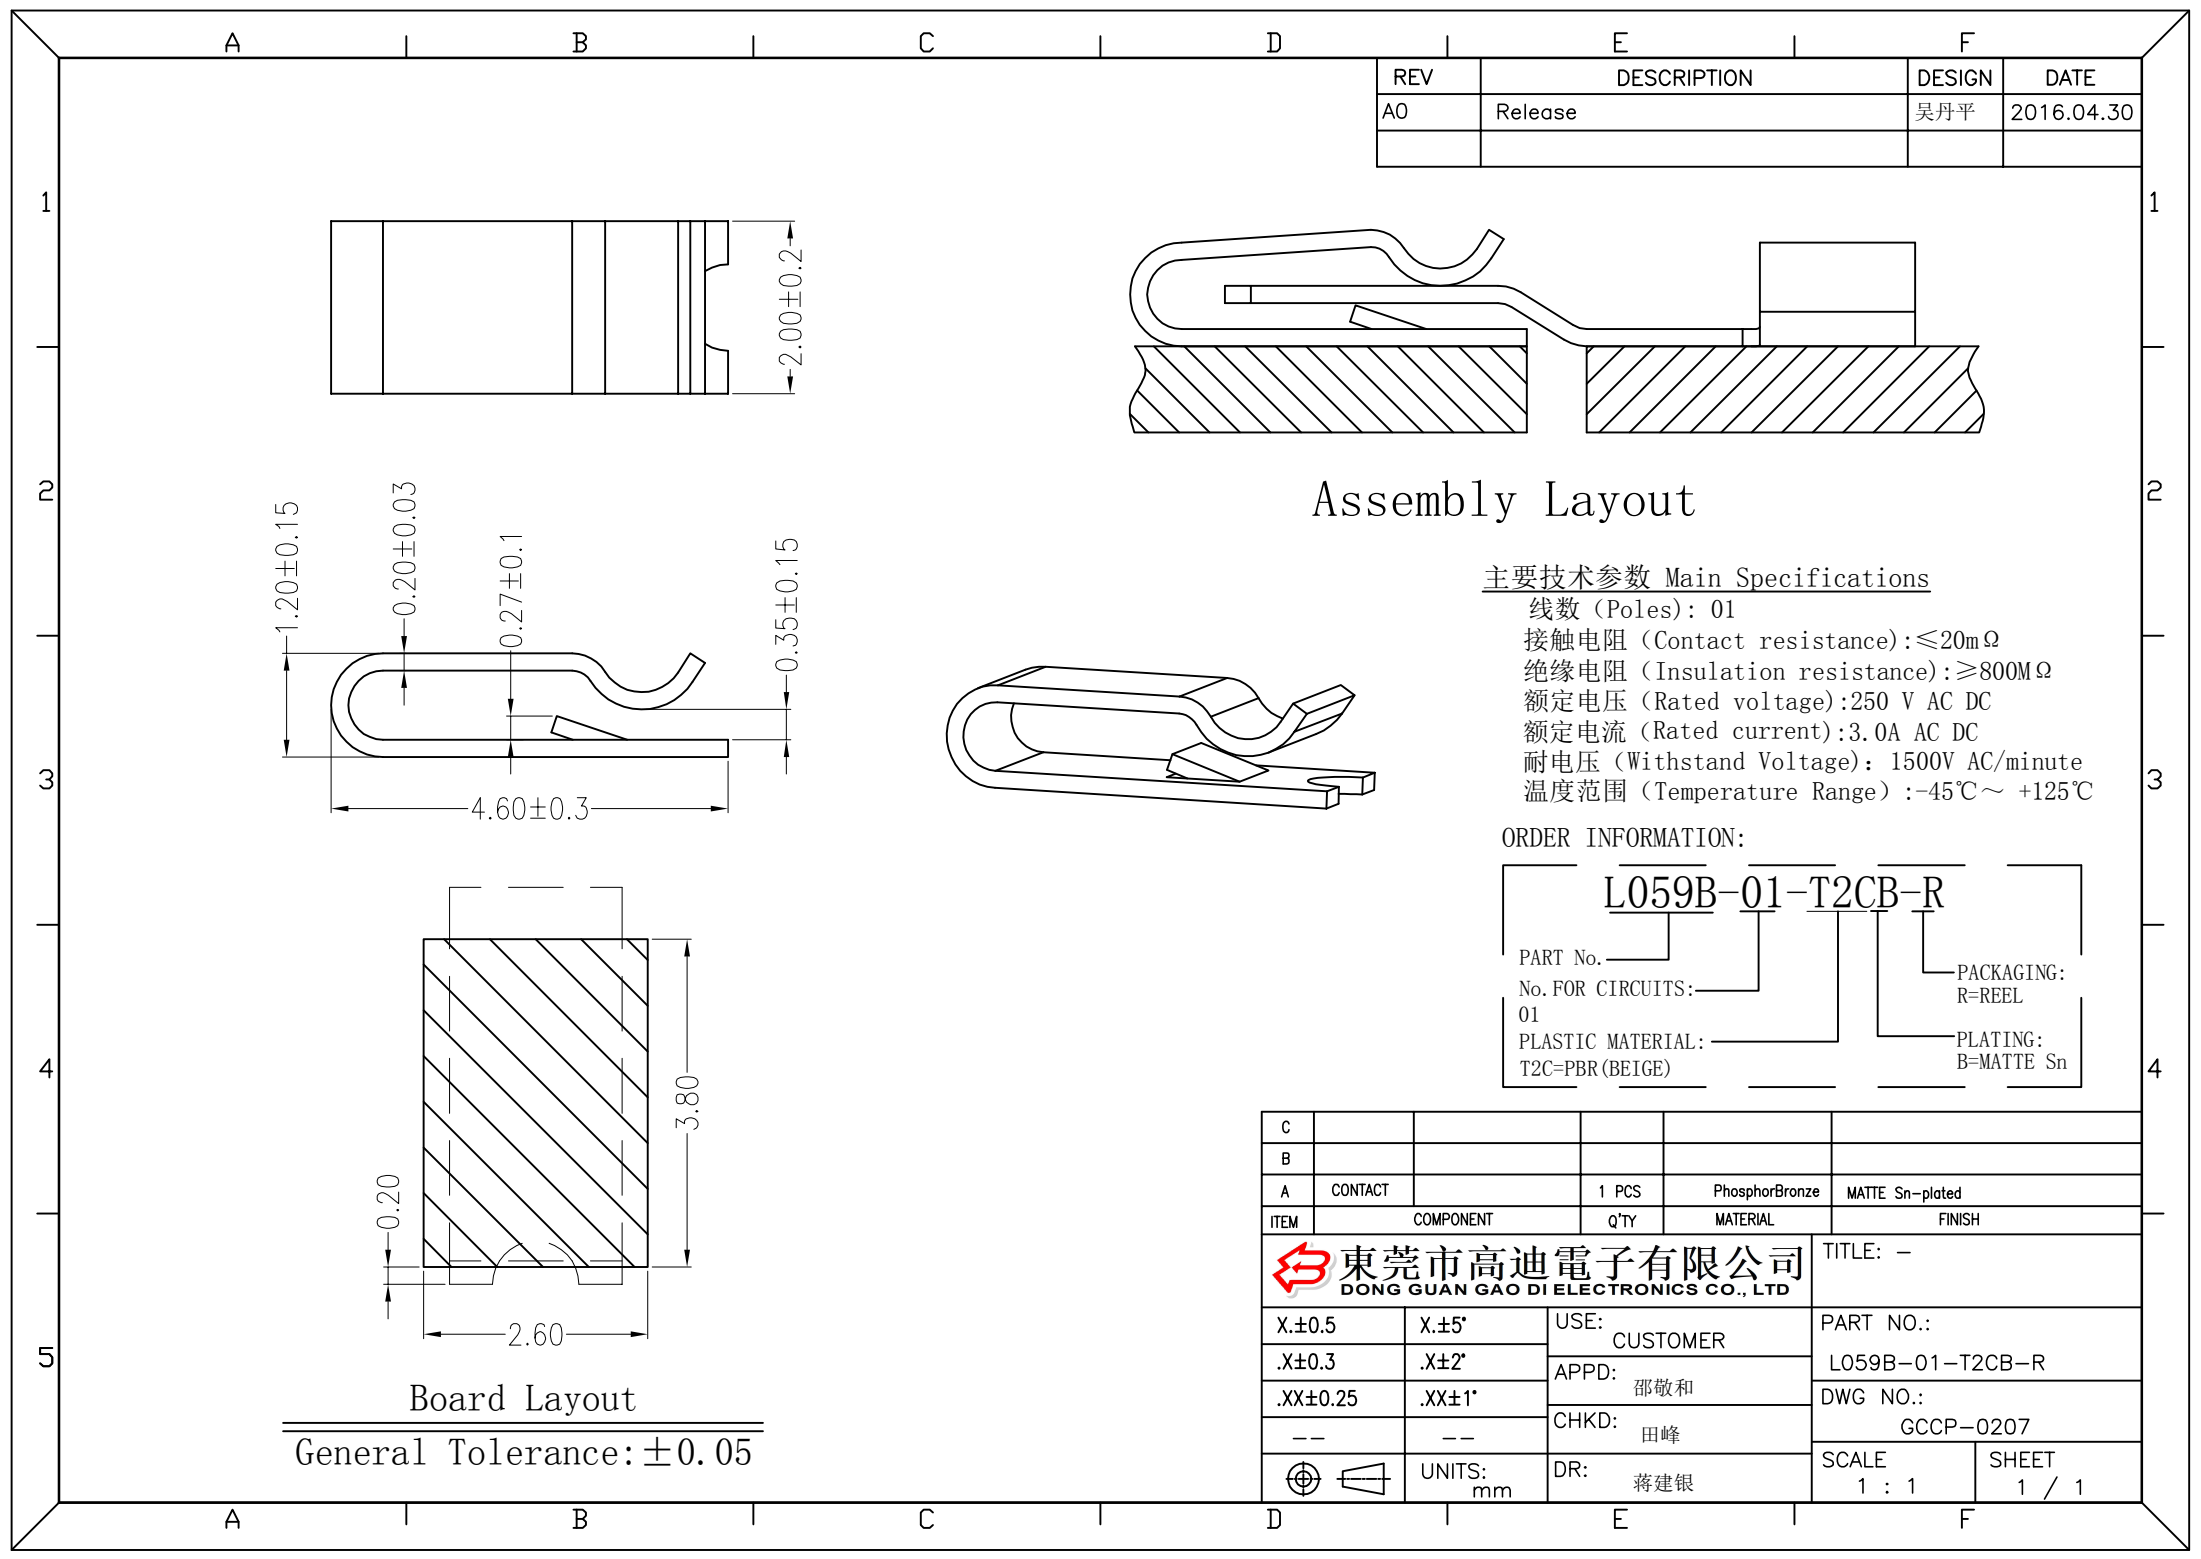

REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.04.30

Assembly Layout

主要技术参数 Main Specifications

线数 (Poles): 01
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 800\text{M}\Omega$
额定电压 (Rated voltage): 250 V AC DC
额定电流 (Rated current): 3.0A AC DC
耐电压 (Withstand Voltage): 1500V AC/minute
温度范围 (Temperature Range): $-45^{\circ}\text{C} \sim +125^{\circ}\text{C}$

ORDER INFORMATION:

L059B-01-T2CB-R

PART No.

No. FOR CIRCUITS: 01

PLASTIC MATERIAL: T2C=PBR (BEIGE)

PACKAGING: R=REEL

PLATING: B=MATTE Sn

C					
B					
A	CONTACT		1 PCS	PhosphorBronze	MATTE Sn-plated
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH	
東莞市高迪電子有限公司 DONG GUAN GAO DI ELECTRONICS CO., LTD					TITLE: -
X.±0.5	X.±5'	USE: CUSTOMER		PART NO.: L059B-01-T2CB-R	
.X±0.3	.X±2'	APPD: 邵敬和		DWG NO.: GCCP-0207	
.XX±0.25	.XX±1'	CHKD: 田峰		SCALE 1 : 1	
--	--	DR: 蒋建银		SHEET 1 / 1	
⊕	⚡	UNITS: mm			

Board Layout
General Tolerance: ± 0.05