



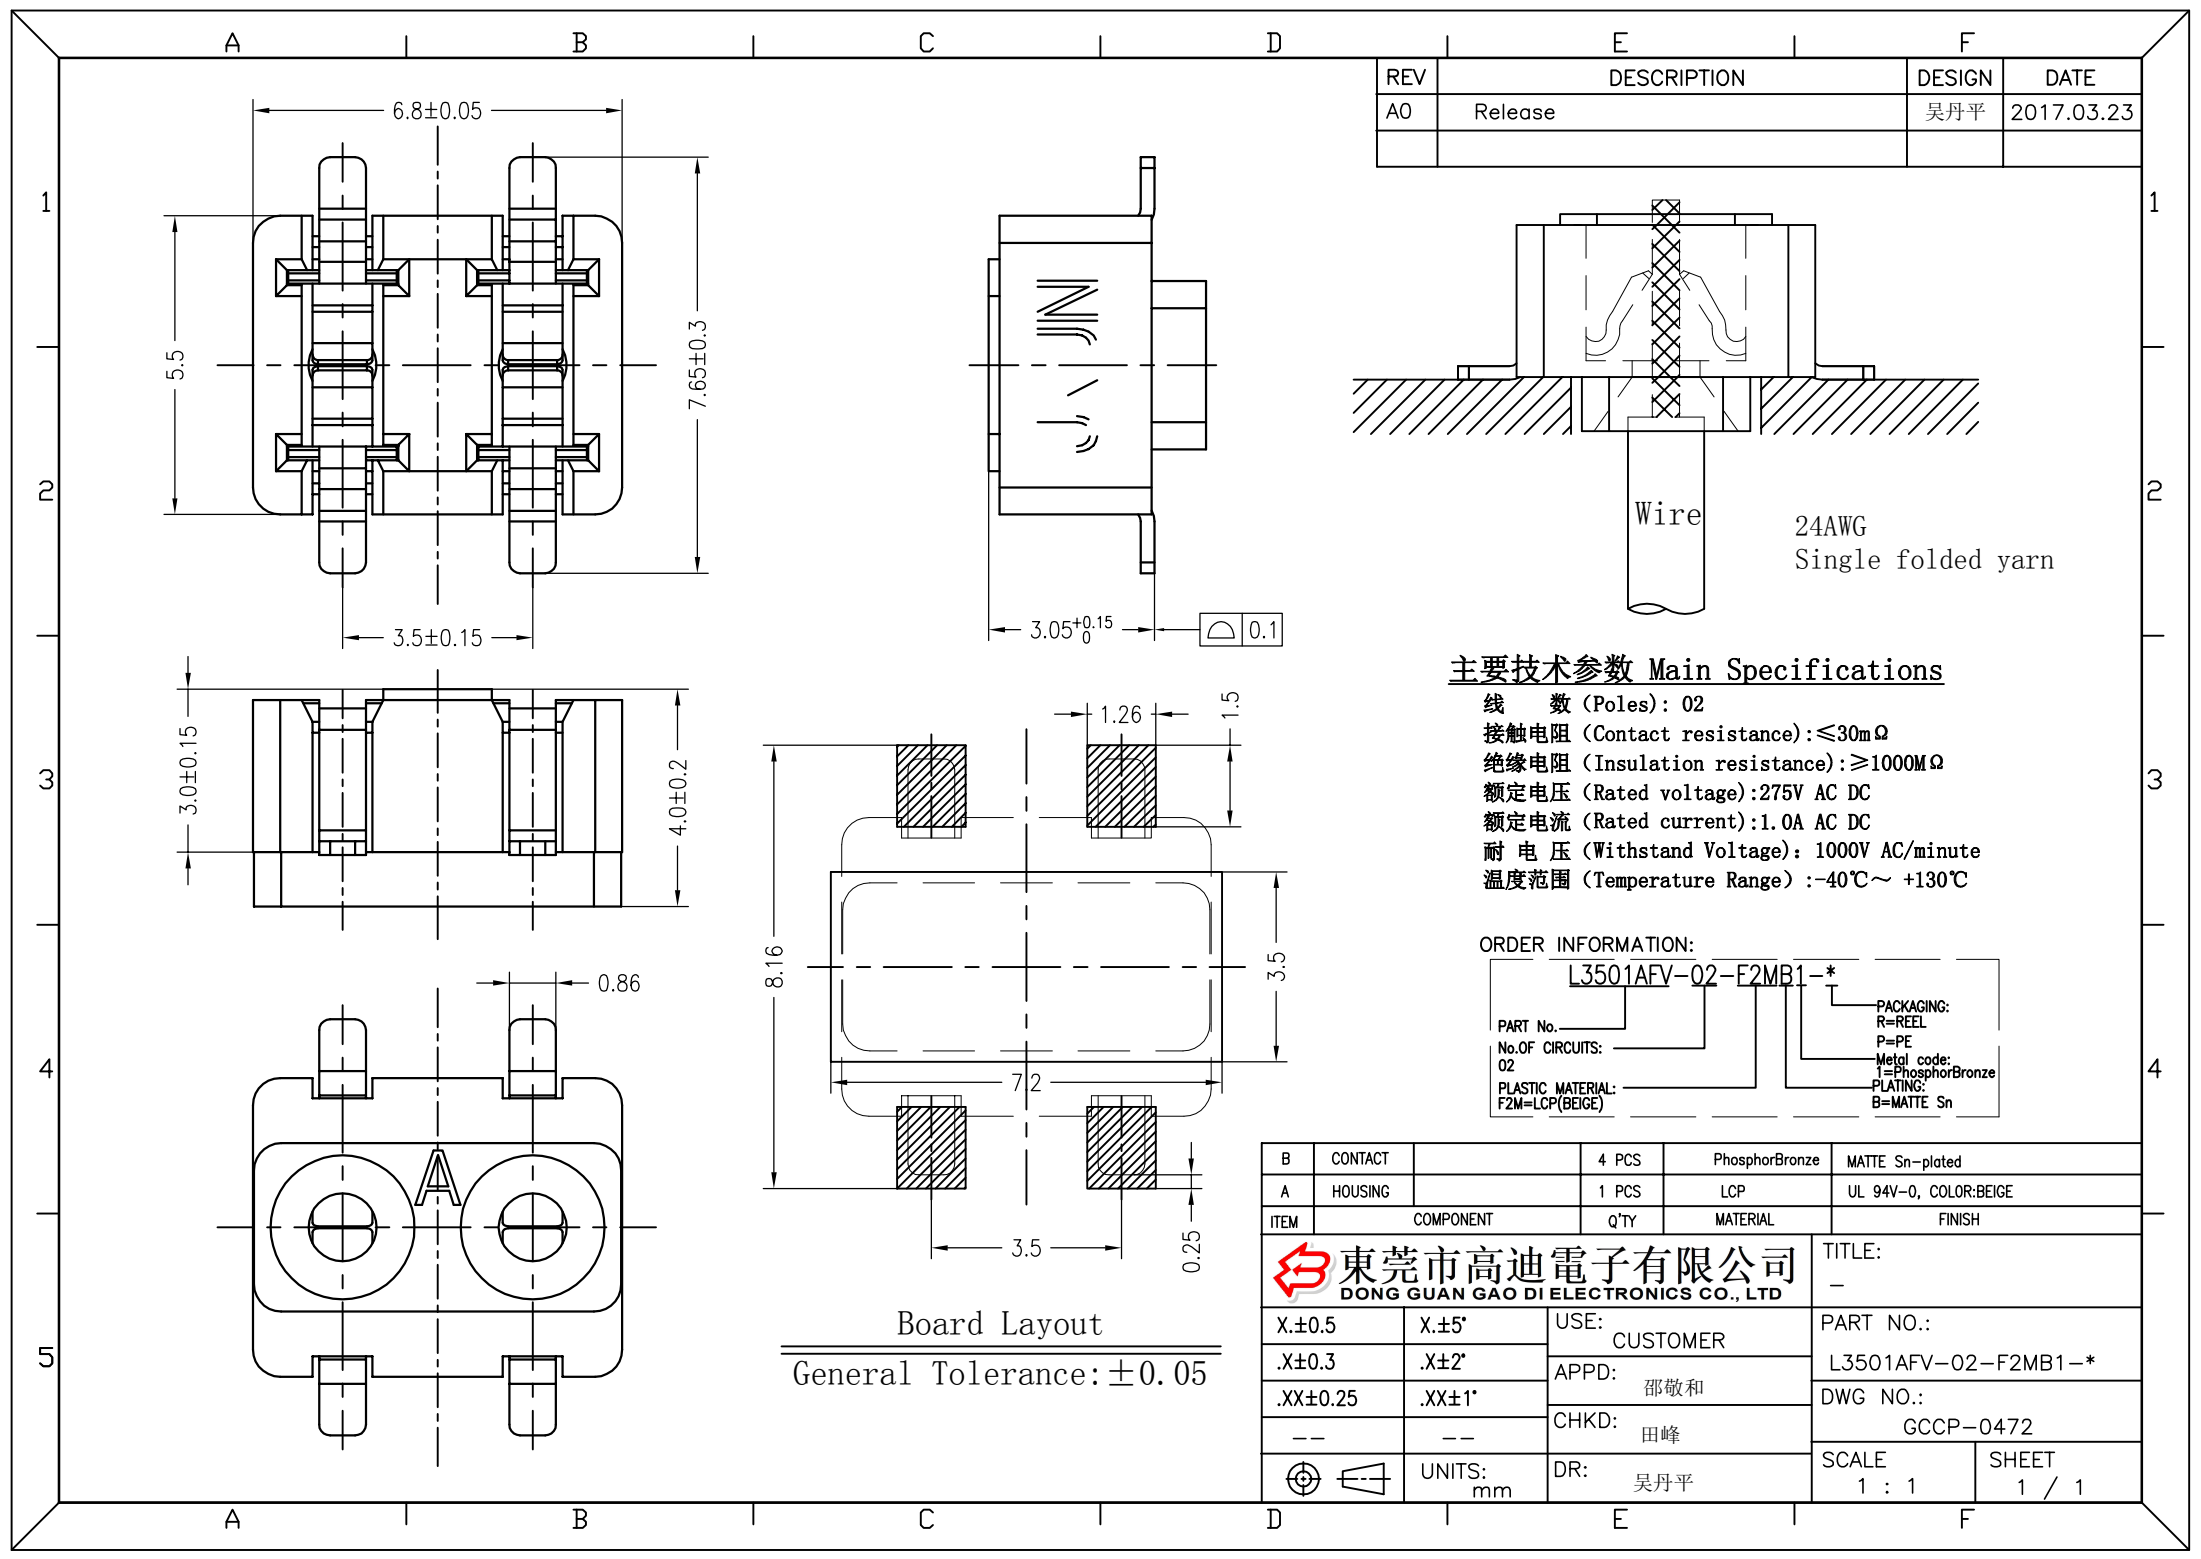

REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2017.03.23

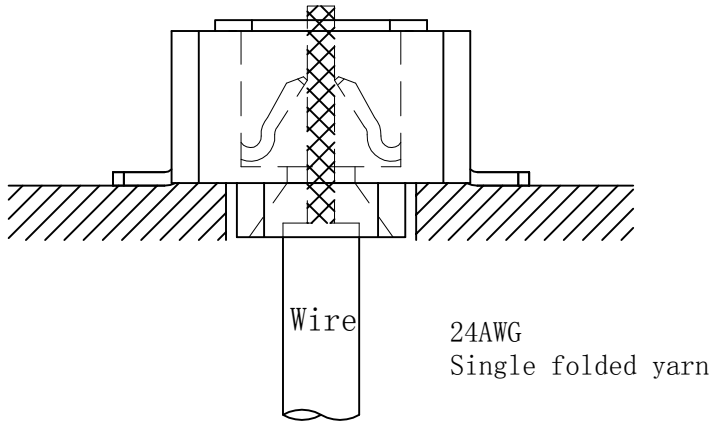


主要技术参数 Main Specifications

线 数 (Poles): 02
接触电阻 (Contact resistance): $\leq 30m\Omega$
绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
额定电压 (Rated voltage): 275V AC DC
额定电流 (Rated current): 1.0A AC DC
耐 电 压 (Withstand Voltage): 1000V AC/minute
温度范围 (Temperature Range): $-40^{\circ}C \sim +130^{\circ}C$

ORDER INFORMATION:

L3501AFV-02-F2MB1-*			
PART No.		PACKAGING:	
No. OF CIRCUITS:		R=REEL	
02		P=PE	
PLASTIC MATERIAL:		Metal code:	
F2M=LCP(BEIGE)		1=PhosphorBronze	
		PLATING:	
		B=MATTE Sn	

B	CONTACT	4 PCS	PhosphorBronze	MATTE Sn-plated
A	HOUSING	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
 东莞市高迪电子有限公司 DONG GUAN GAO DI ELECTRONICS CO., LTD TITLE: -				
X.±0.5	X.±5°	USE:	CUSTOMER	
.X±0.3	.X±2°	APPD:	邵敬和	
.XX±0.25	.XX±1°	CHKD:	田峰	
--	--	DR:	吴丹平	
	UNITS: mm	DR:	吴丹平	
PART NO.:			L3501AFV-02-F2MB1-*	
DWG NO.:			GCCP-0472	
SCALE			1 : 1	SHEET
				1 / 1

Board Layout

General Tolerance: ± 0.05