

A

B




C

D

E

F

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0	-	Release	吴丹平	2017.06.02

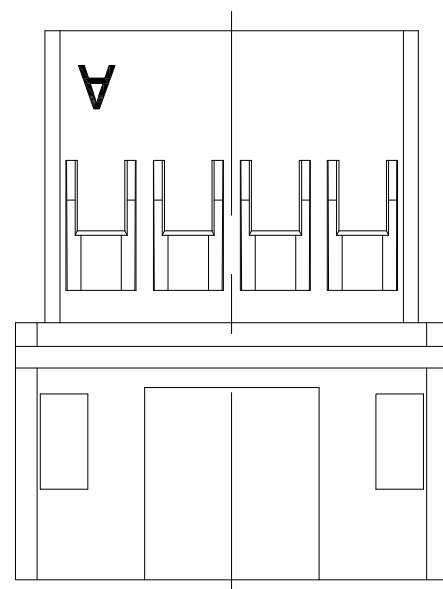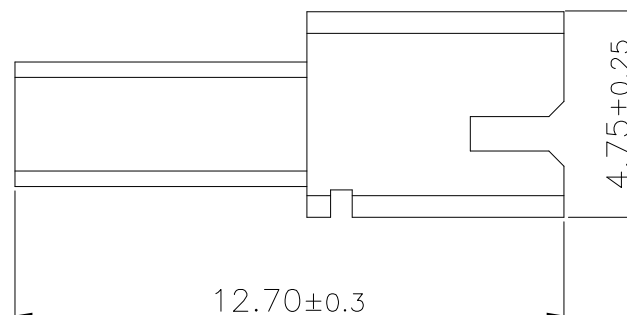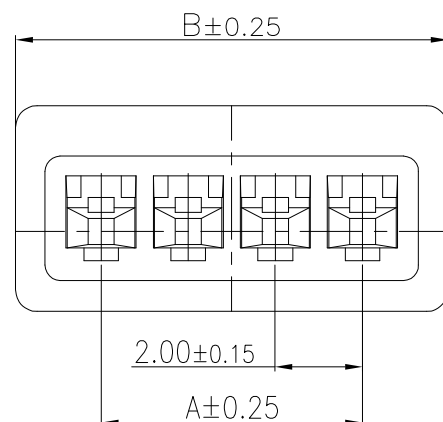


线数 (N)	尺寸 mm	
	A	B
2	2.00	6.00
3	4.00	8.00
4	6.00	10.00
5	8.00	12.00
6	10.00	14.00
7	12.00	16.00
8	14.00	18.00
9	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00




技术说明:

Craft specifications

1. 材质 Material: PA66, UL94V-0.
2. 额定电流 Current rating: 1.0A AC, DC
3. 额定电压 Voltage rating: 50V AC, DC
4. 温度范围 Temperature range: -25℃ to 85℃
5. 接触电阻 Contact resistance: $\leq 20 \text{ m}\Omega$
6. 绝缘电阻 Insulation resistance: $\geq 500 \text{ M}\Omega$

C					
B					
A	PEDESTAL		1 PCS	PA66	COLOR:WHITE
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
 东莞市高迪电子有限公司 DONG GUAN GAO DI ELECTRONICS CO., LTD					TITLE: C2002R —
X.±0.5		X.±5°	USE: CUSTOMER		PART NO.:
.X±0.3		.X±2°	APPD: 邵敬和		C2002R—**—21
.XX±0.25		.XX±1°	CHKD: 田 峰		DWG NO.:
— —		— —			GCCP—0627
		UNITS: mm	DR: 吴丹平		SCALE 1 : 1
					SHEET 1 / 1

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	蒋建银	2018.01.20

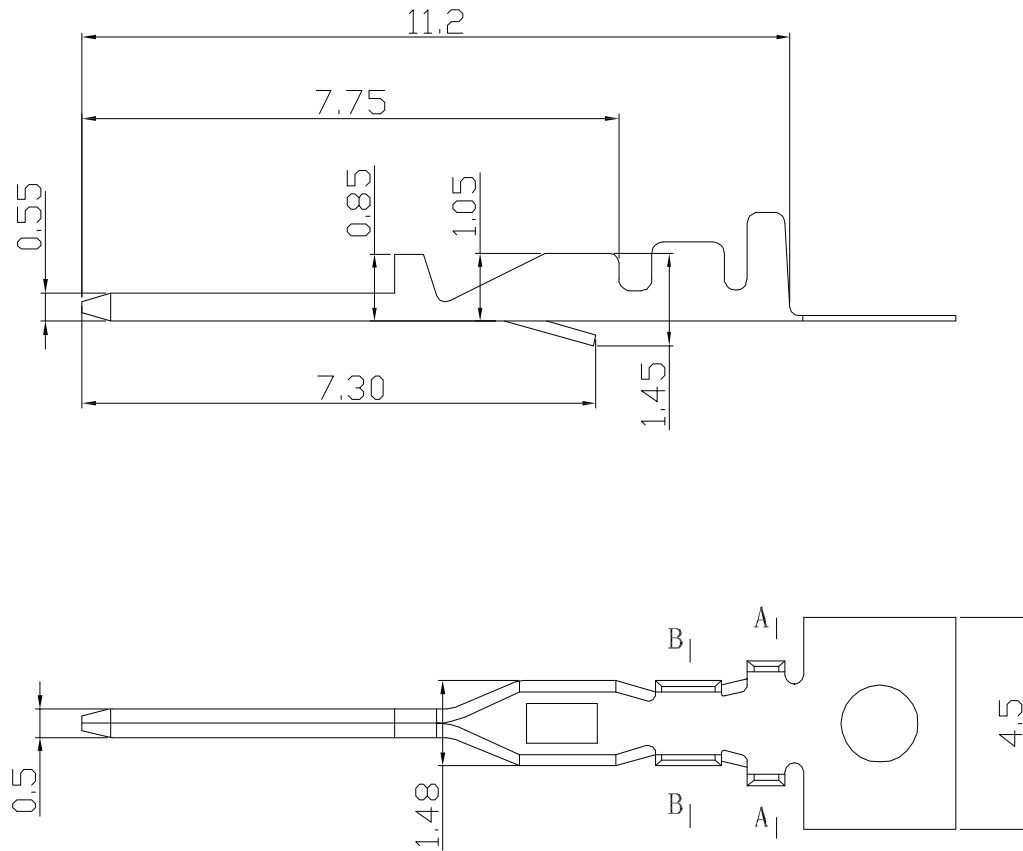

Ordering Information & Specification:

Part No	Wire Range	Insulation O. D.	Material	Finish	Qty/Reel
C2002RT-PA	AWG #22~#28	1.0~1.50mm	Phosphor bronze	Sn-plated	10.000 pcs
 东莞市高迪电子有限公司 DONG GUAN GAO DI ELECTRONICS CO., LTD			TITLE: C2002RT		
X.±0.5	X.±5°	USE: CUSTOMER		PART NO.:	
.X±0.3	.X±2°	APPD: 邵敬和		C2002RT-PA	
.XX±0.25	.XX±1°	CHKD: 田 峰		DWG NO.:	
--	--	DR: 吴丹平		GCDZ-0072	
	UNITS: mm			SCALE 1 : 1	SHEET 1 / 1