
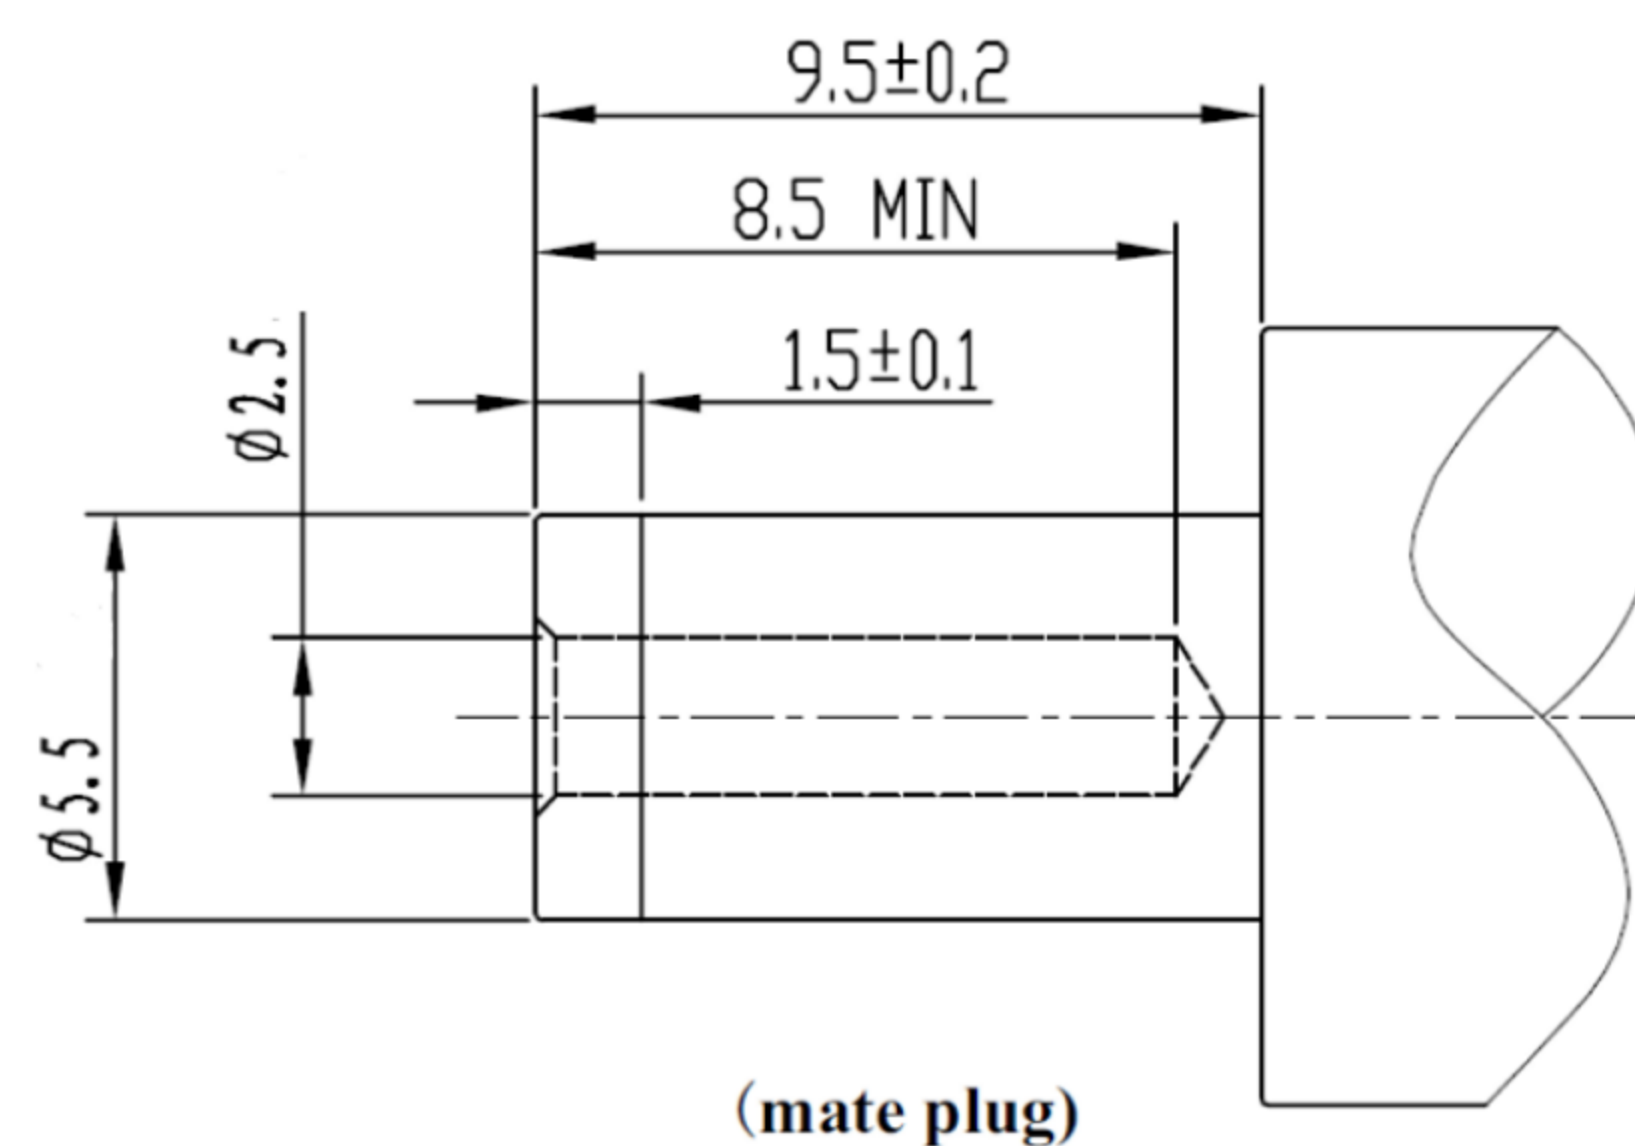
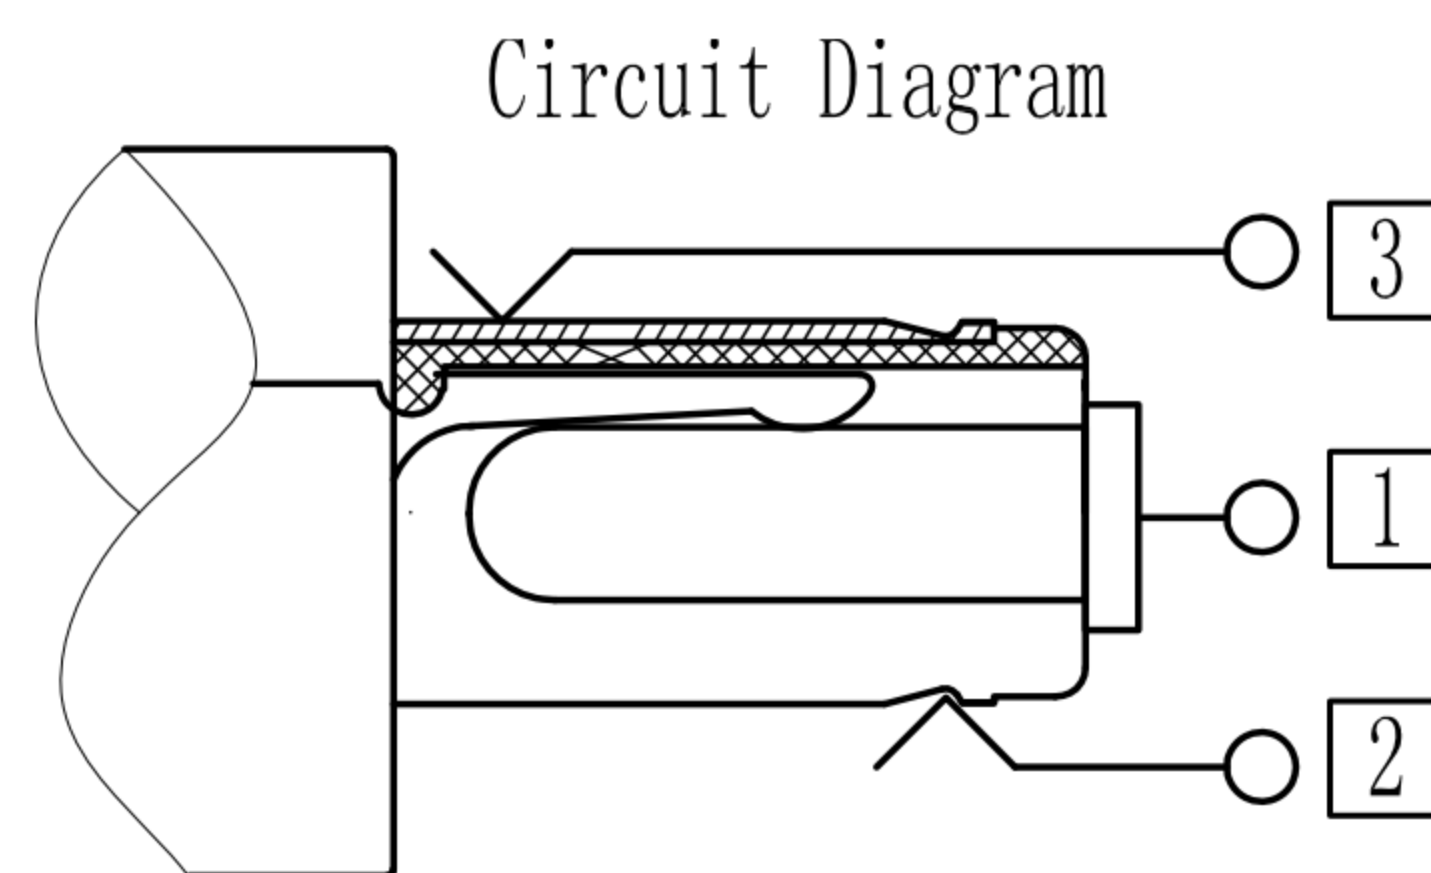
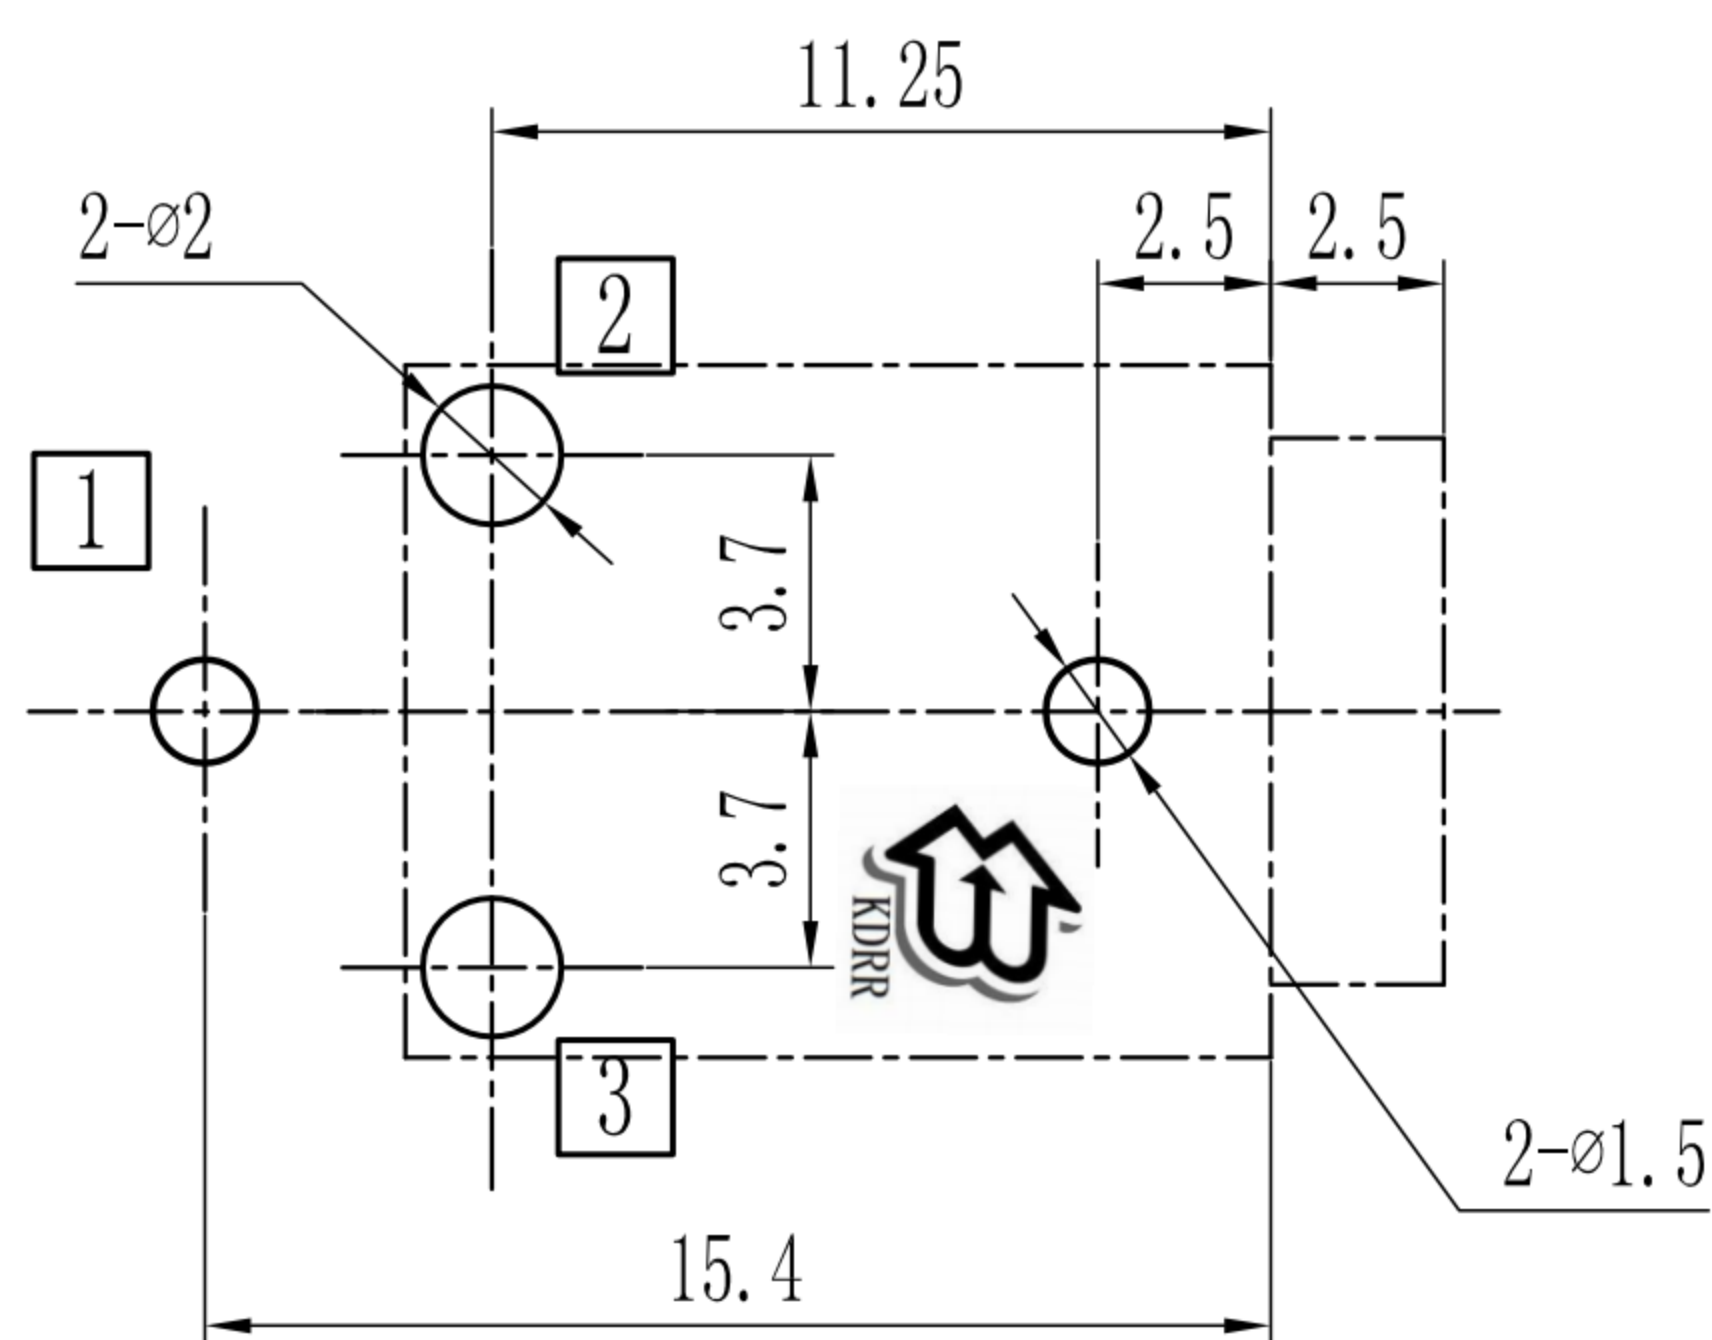
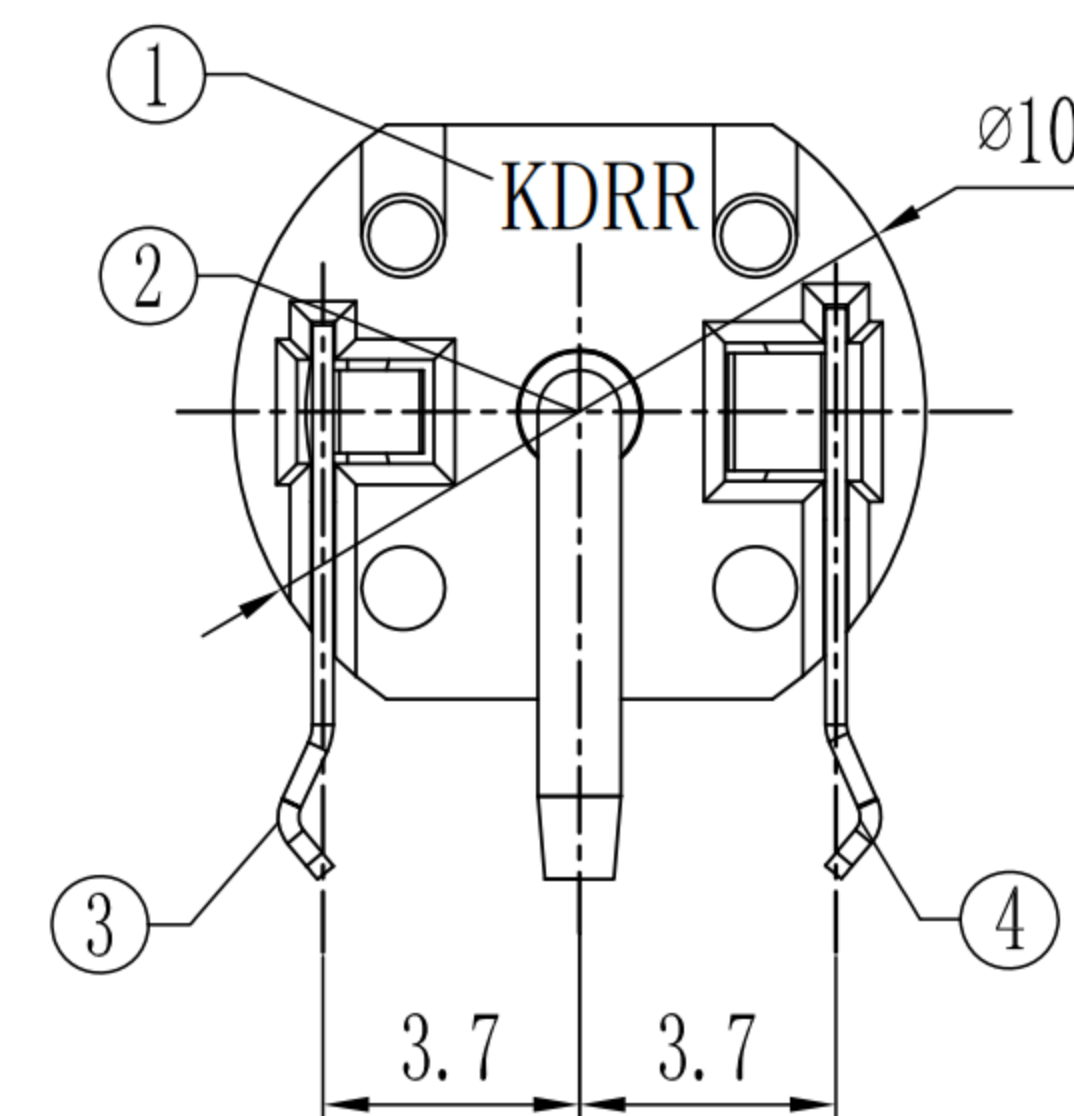
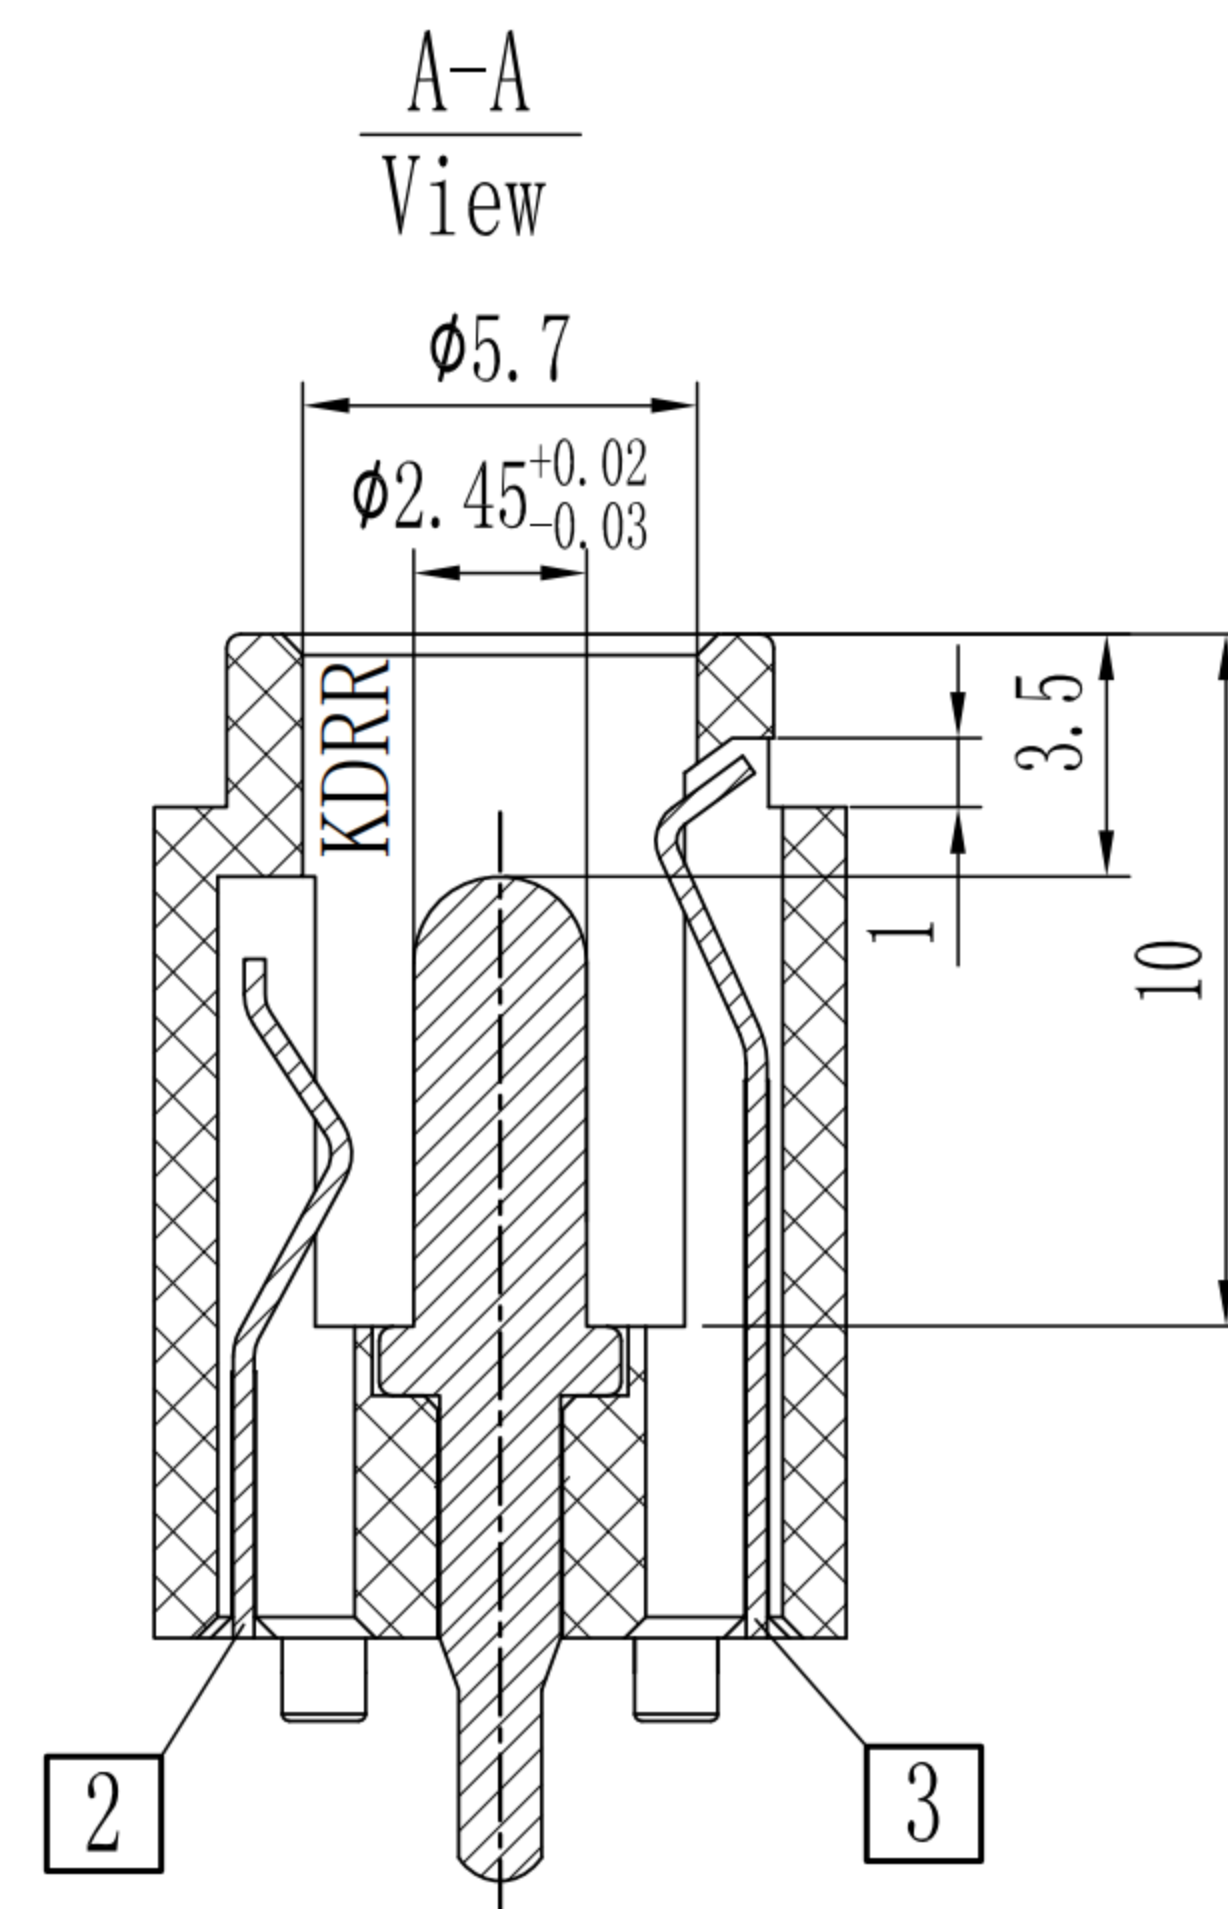
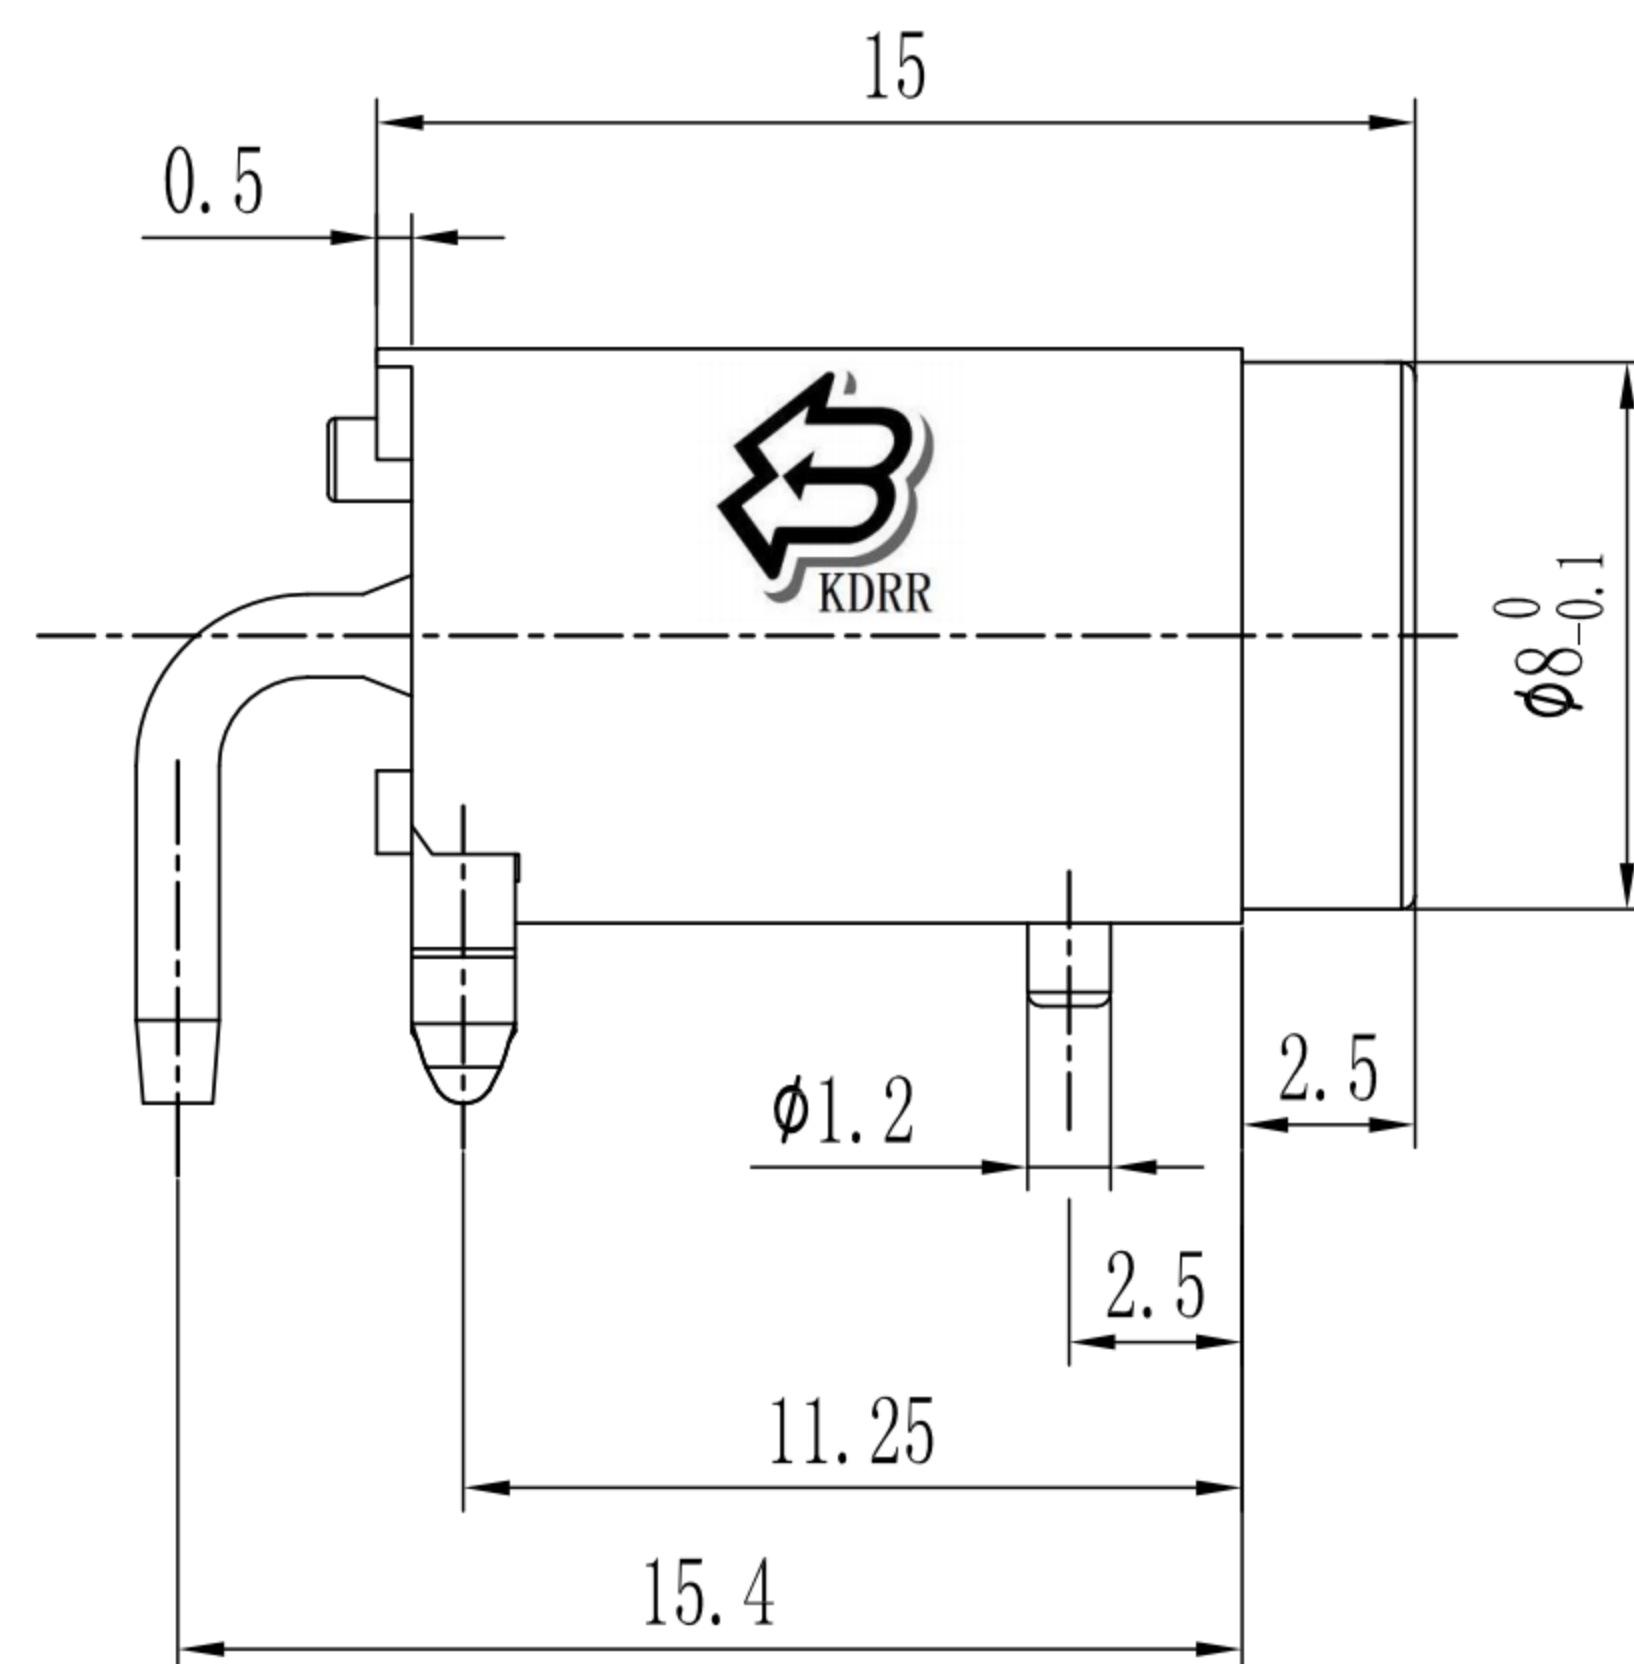


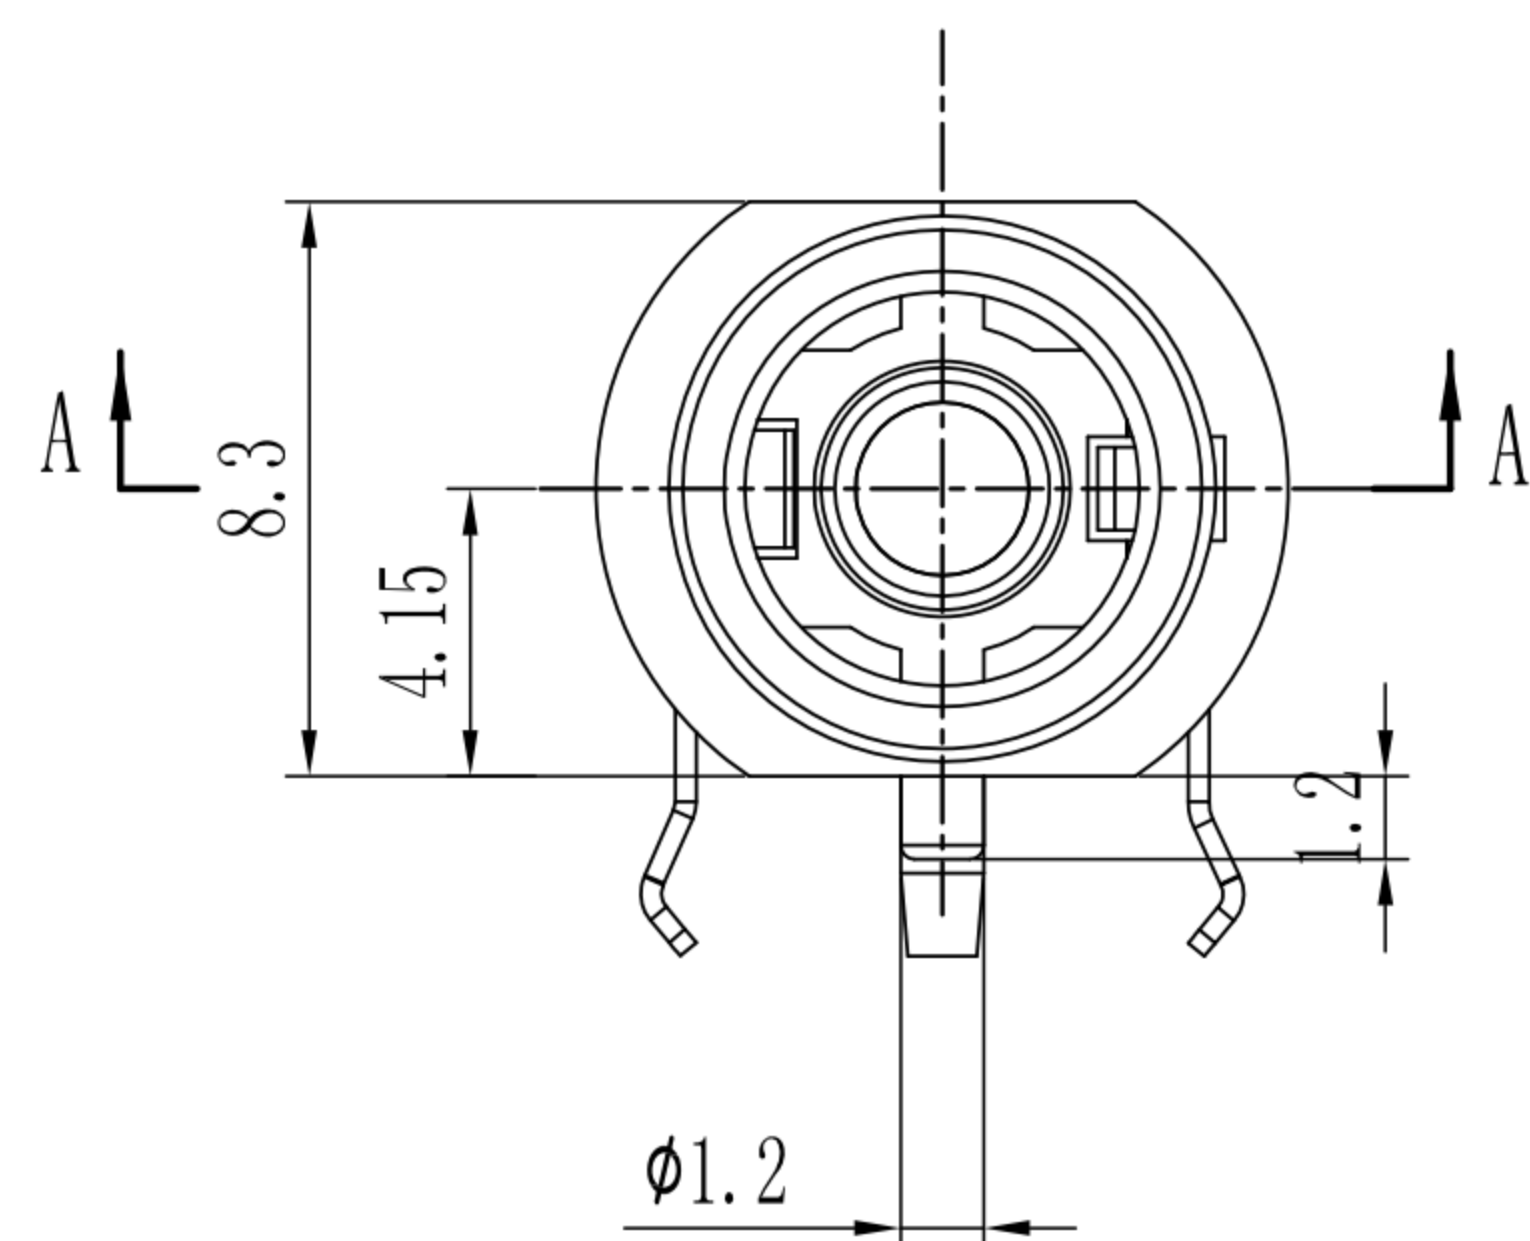

SPECIFICATION

1. Rating : DC 12V 30V , 3.0A 5.0A
2. Contact resistance : $\leq 30\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles

④	tip spring	2	 Beryllium bronze	1	Ag-plating	
③	tip spring	3	 Beryllium bronze	1	Ag-plating	
②	Center pin	1	Brass	1	Ag-plating	
①	Housing		PPA	1	Black	
NO	DESCRIPTION		MATERIAL	QTY	FINISH/COLOUR	REMARKS

4	更新材質	Jack	050420
3	更新尺寸	Jack	121119
2	更新尺寸標示位置	Jack	082719
1	更新尺寸	Jack	080519
ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	± 0.3				
	Above 15 ~ 30	± 0.4				
	Above 30 ~ 50	± 0.5				
	Angle	± 0.3°				

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Ming Ming Zou	6/8/23			MODLE	DC JACK	
CHECKED BY:	DATE	FINISH		DWG NO.	GD-DC-0091W	SIZE
Ning Ning Su	6/8/23	SCALE	1 : 1			A4
APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.		VER
Jia Xiang	6/8/23					R4