

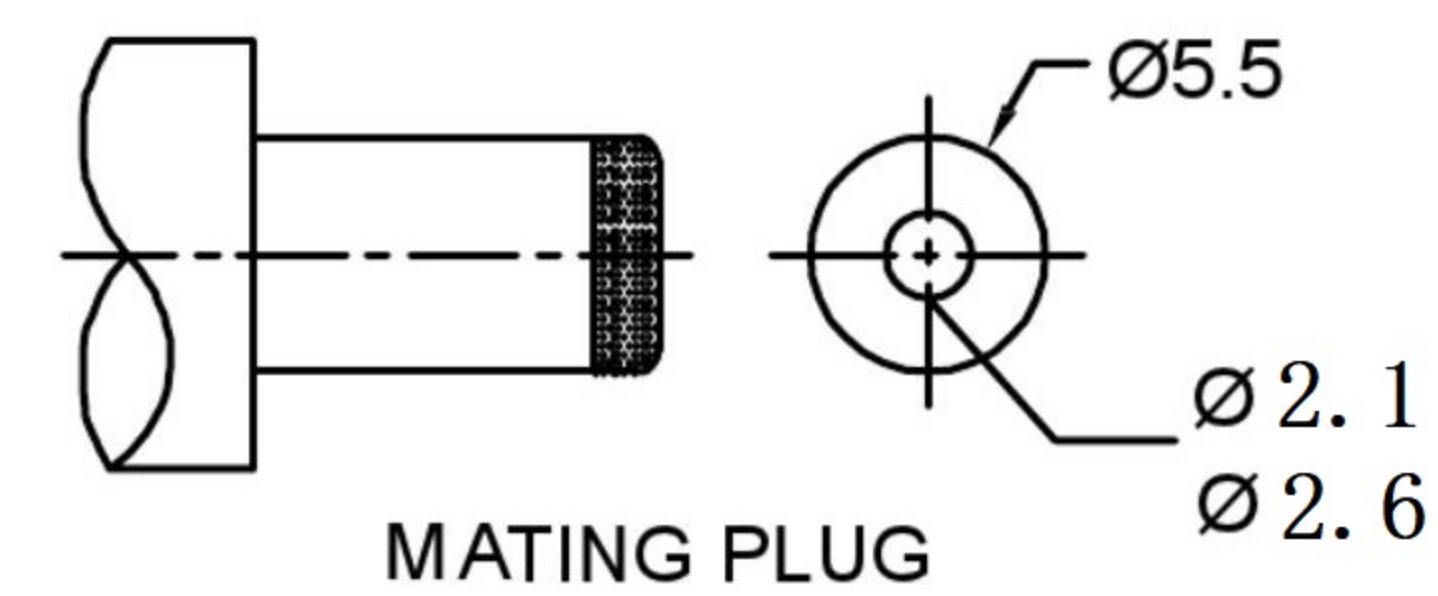
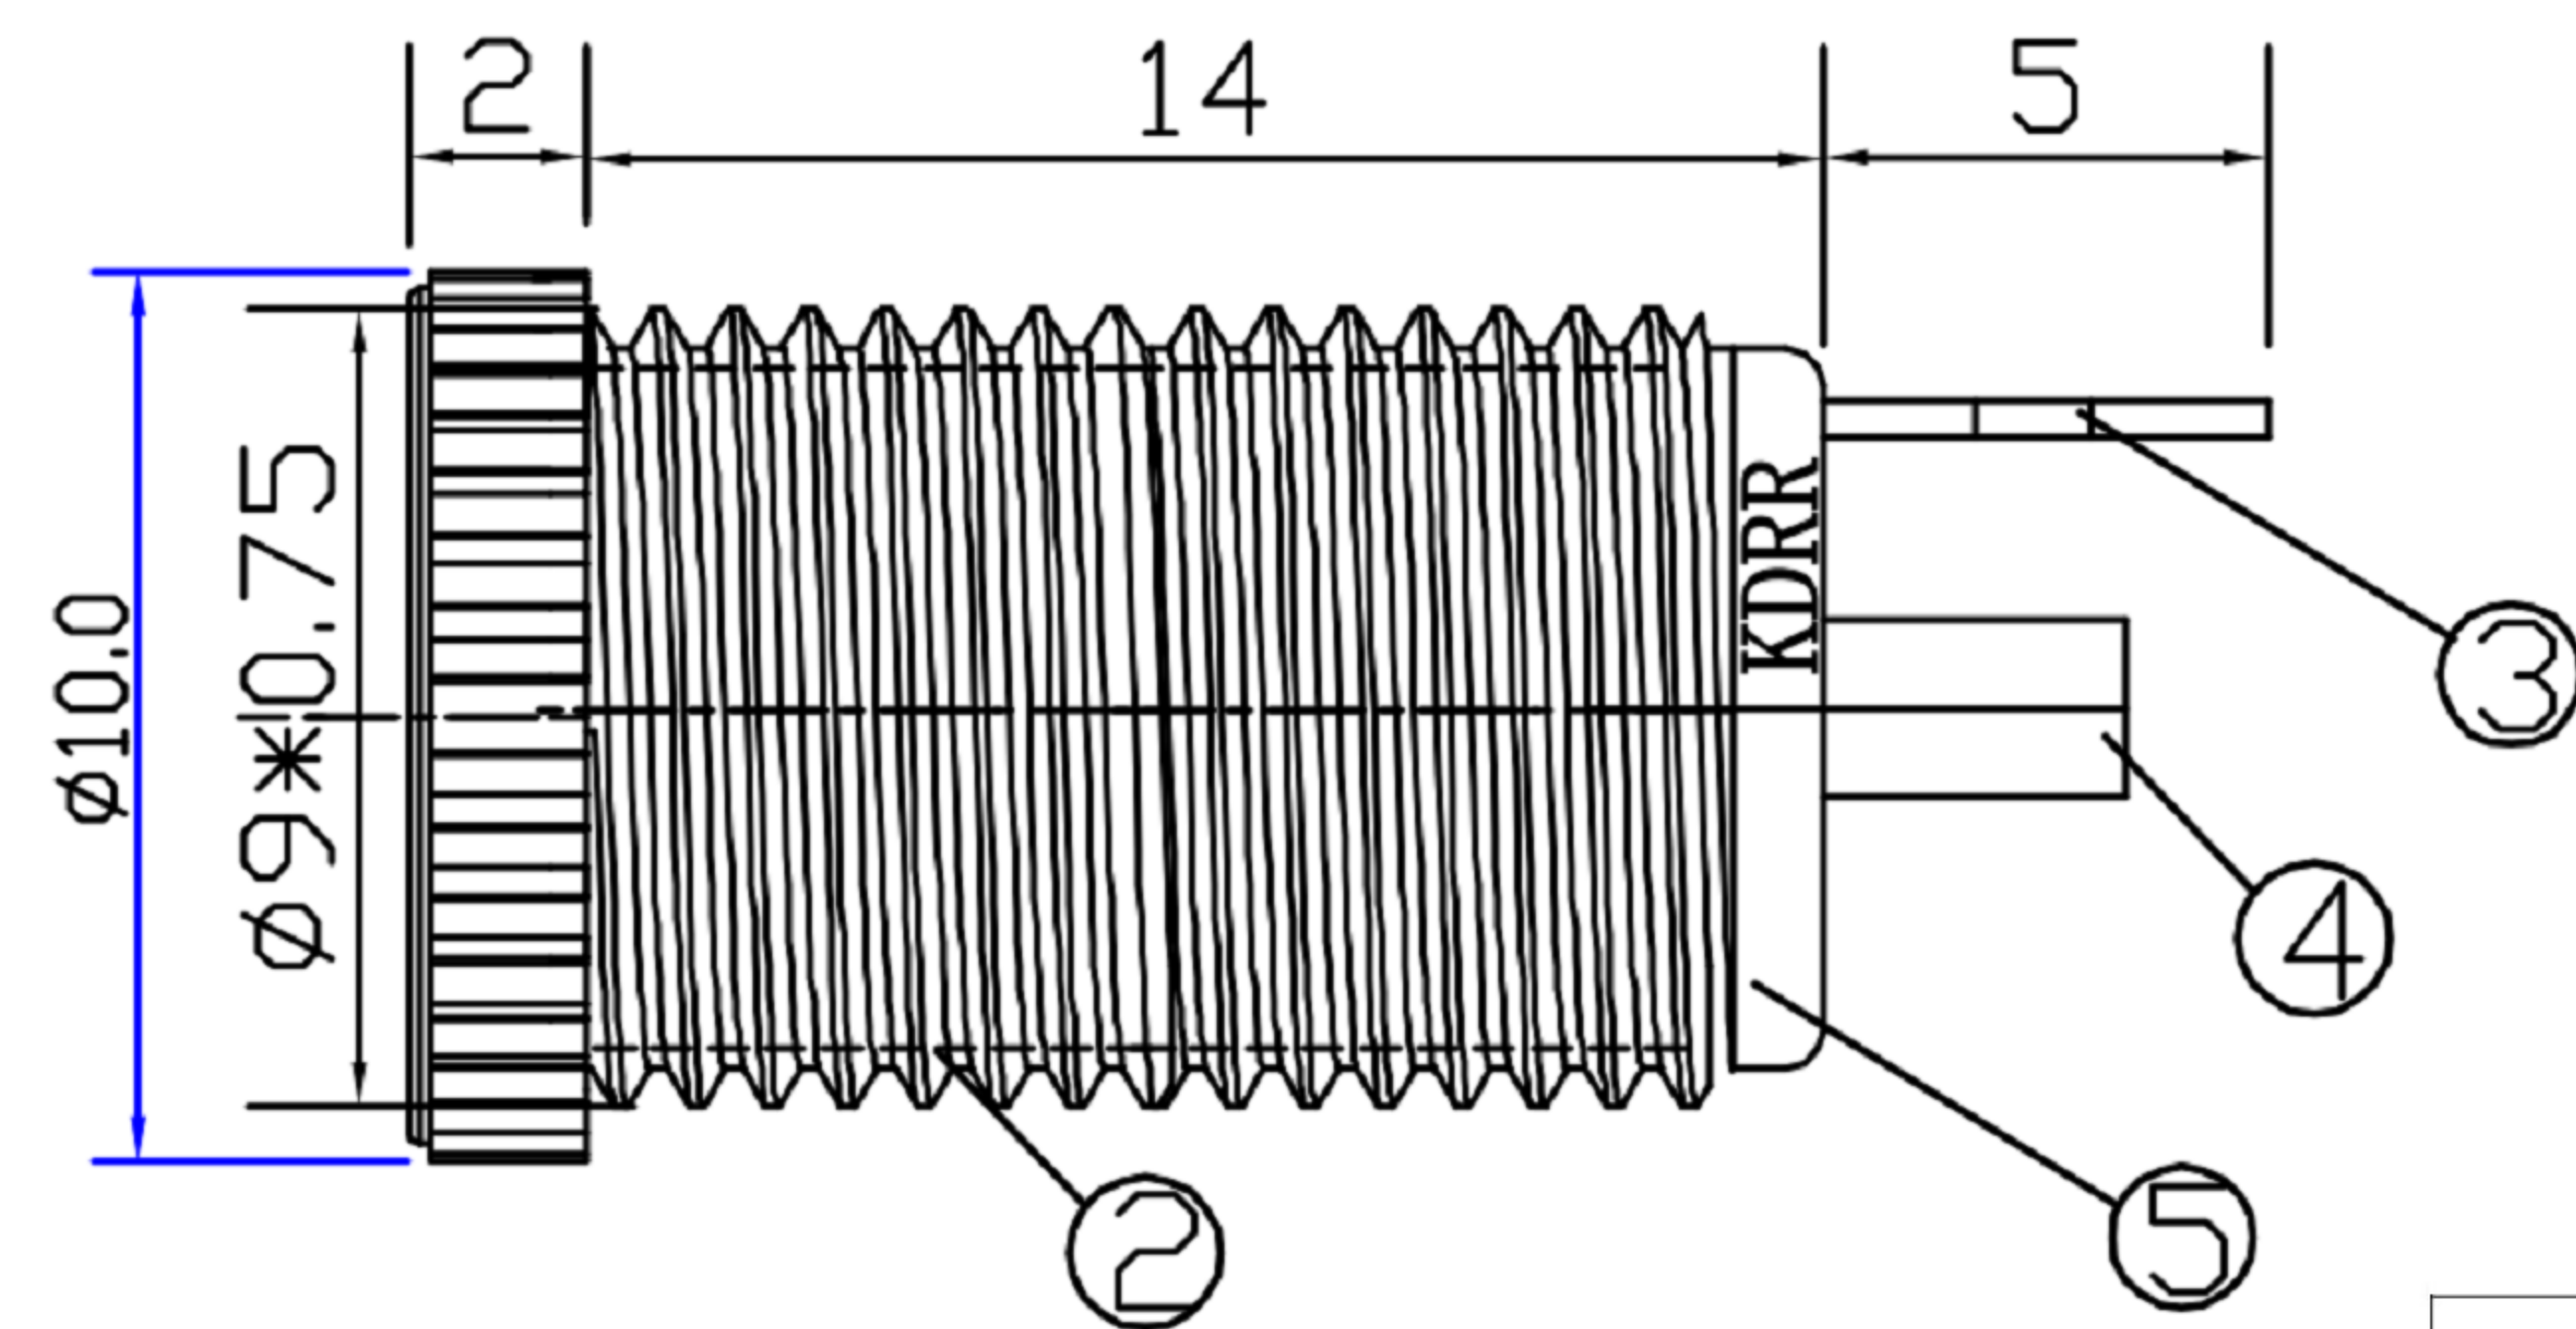
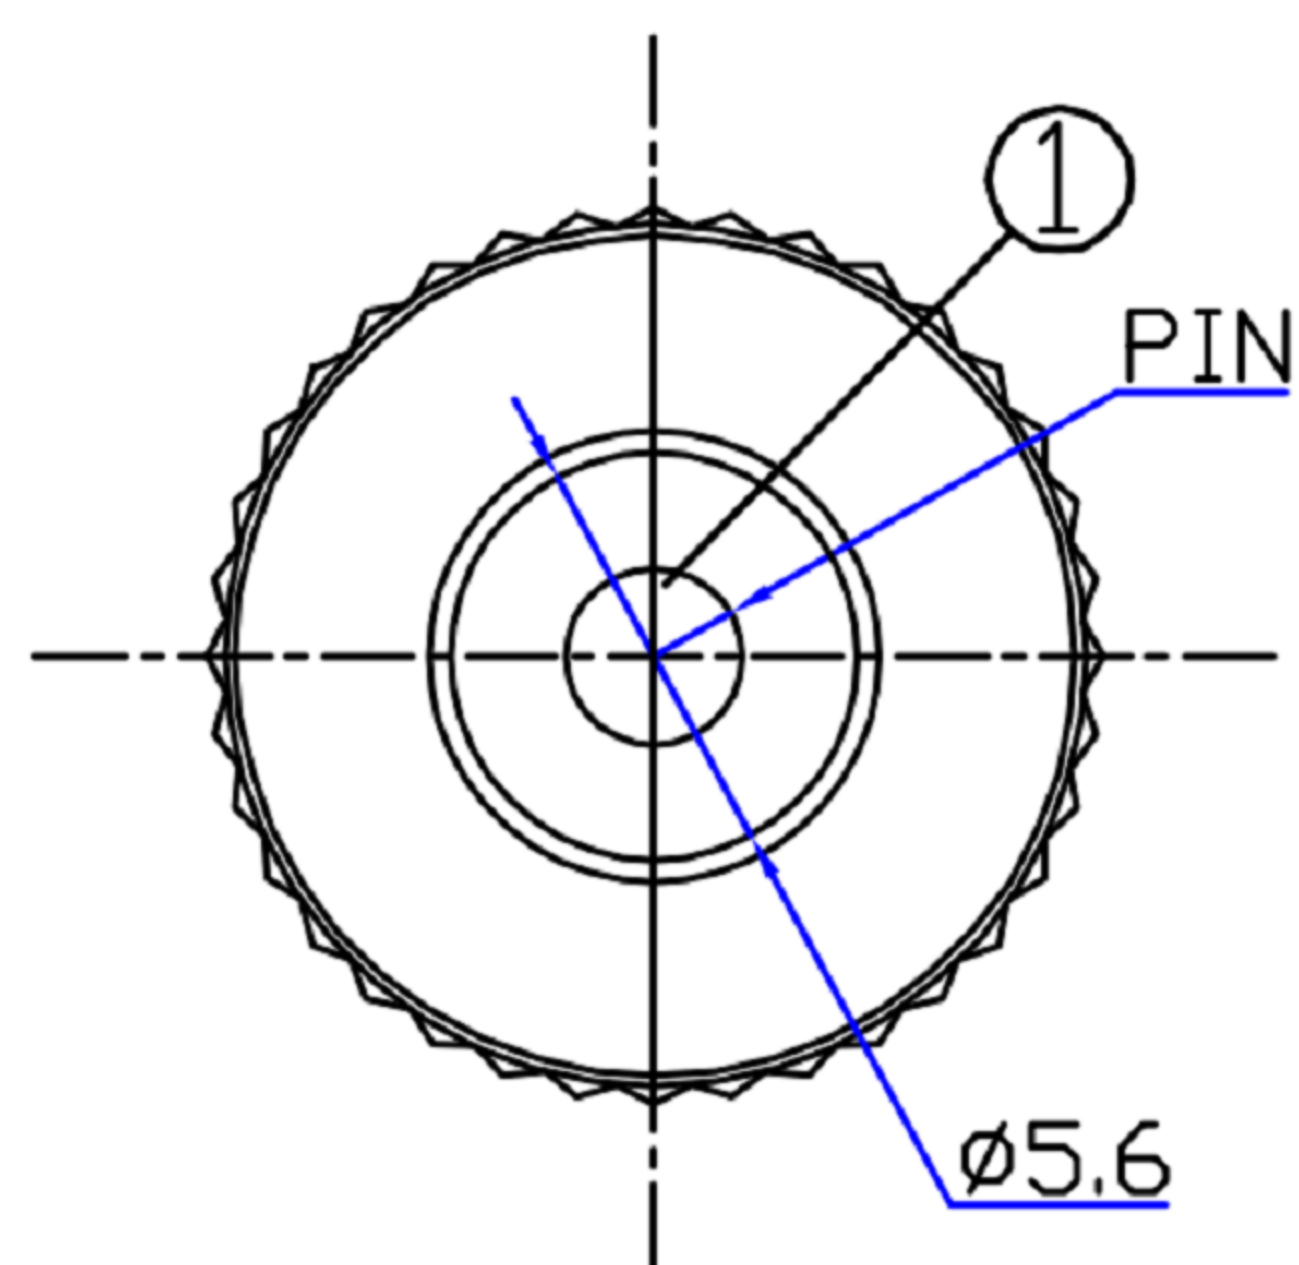




SCHEMATIC		3
		1/2
CENTER PIN	ø2.0mm	
	ø2.5mm	

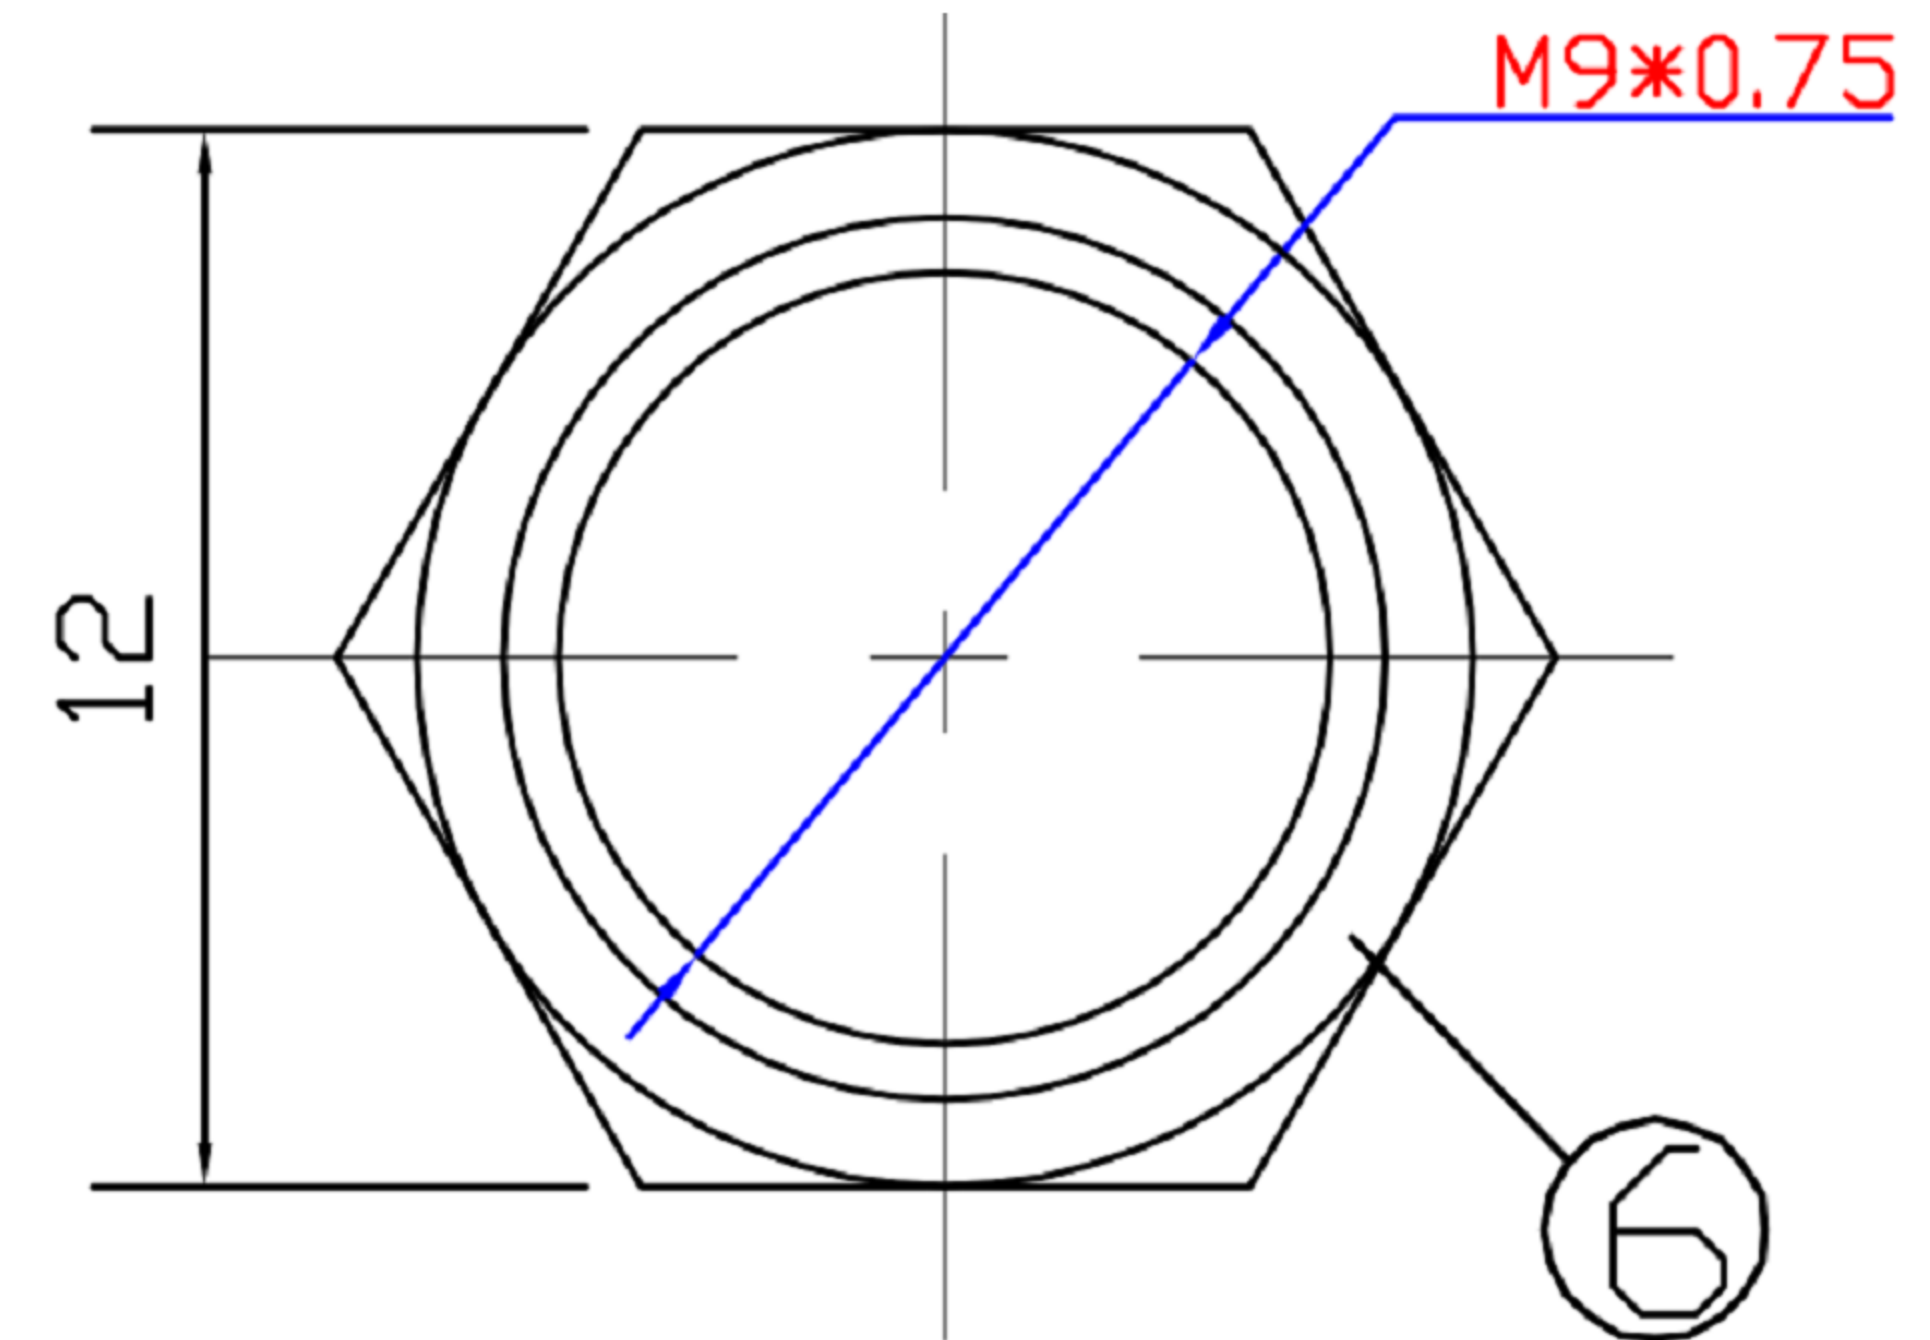

SPECIFICATION

- 1.Rating : DC 12V 30V, 50A 10A
- 2.Contact resistance : ≤30mΩ
- 3.Insulation resistance : ≥100MΩ
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

⑥	COVER	1	PF	
⑤	CONTACT FOOT	1	BRASS	Sn-Plating
④	PIN	1	BRASS	Ni-Plating
③	SPRING	1	PHOSPHOR BRONZE	Sn-Plating
②	FLAT PIECE	1	BRASS	Sn-Plating
①	HOUSING	1	PBT	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	± 0.3				
	Above 15 ~ 30	± 0.4				
	Above 30 ~ 50	± 0.5				
	Angle	± 0.3°				

DRAWN BY:	DATE	MATL		TITLE	JACK		
Ming Ming Zou	6/8/23						
CHECKED BY:	DATE	FINISH		MODLE	DC JACK		
Ning Ning Su	6/8/23	SCALE	1 : 1	DWG NO.	GD-DC-099B	SIZE	
APPROVED BY:	DATE					A4	
Jia Xiang	6/8/23	SHEET NO.	1 of 1	PART NO.		VER	
						R4	

4	更新材質	Jack	050420
3	更新尺寸	Jack	121119
2	更新尺寸標示位置	Jack	082719
1	更新尺寸	Jack	080519
ITEM NO.	DESCRIPTION	DRAWN	DATE