




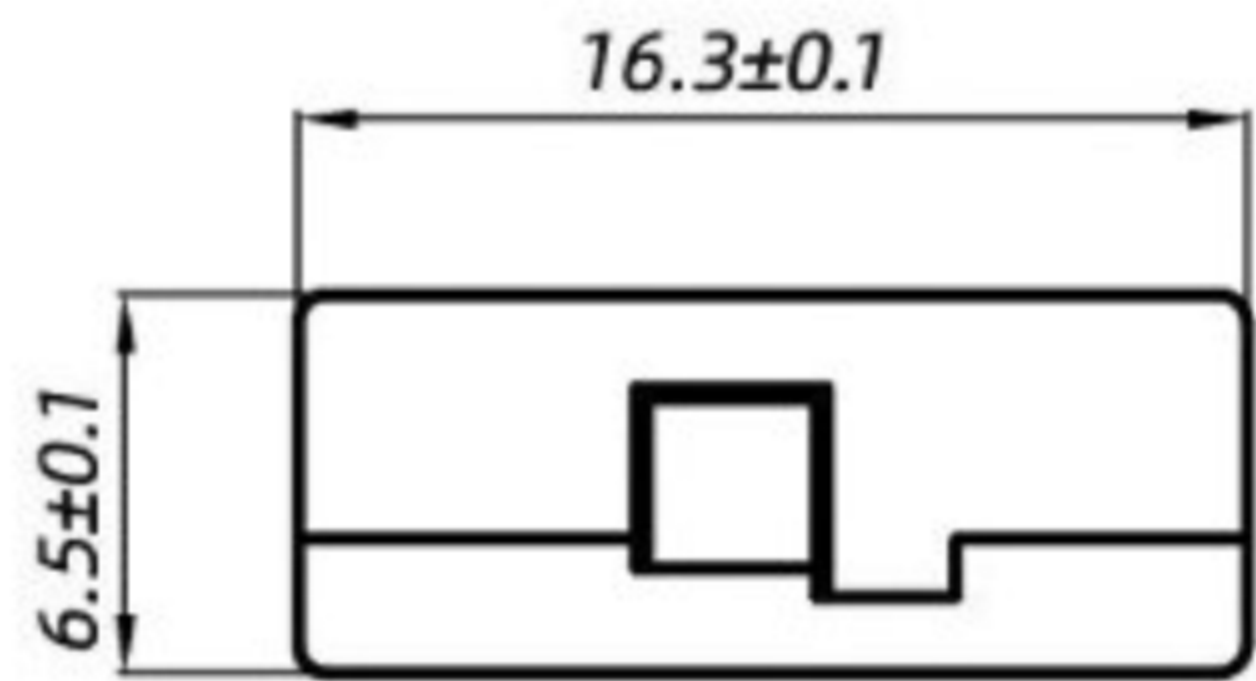

电路原理
CIRCUIT SCHEMATIC

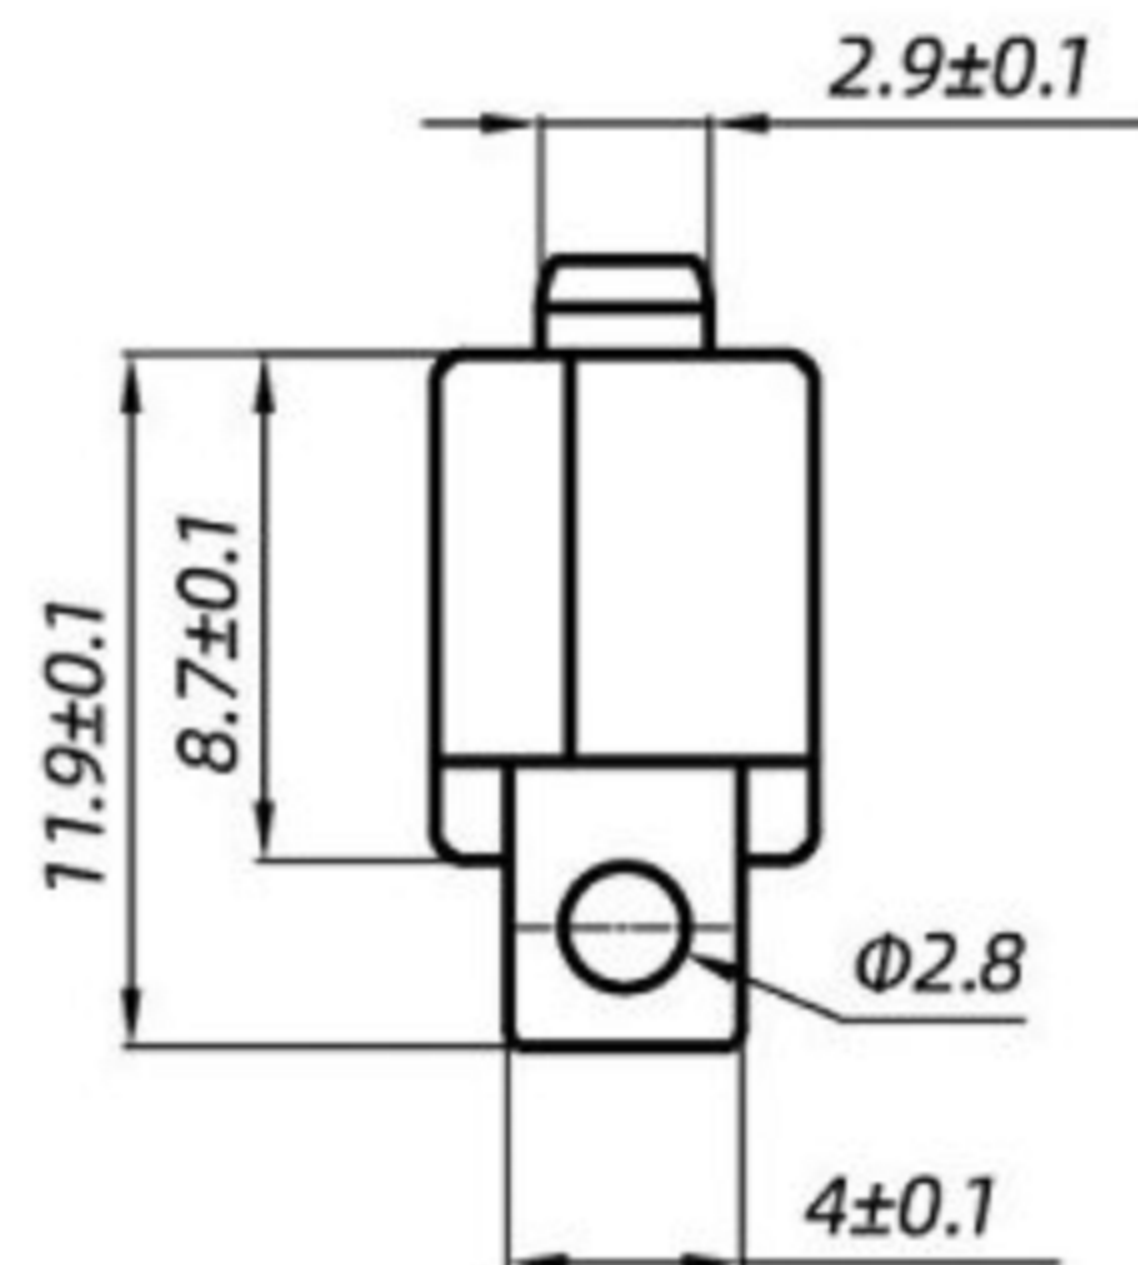


- 按键开关型号 PUSH-BUTTON SWITCH MODEL: LXW-5-1-2
- 焊线端子 SOLDER CONNECTOR TYPE;
单刀单掷 SINGLE POLE SINGLE THROW
- 额定值 RATING: ▲ 16(3)A 125/250VAC μ T105
10A 125/250VAC μ T85
7A 125/250VAC μ T85
▲ 16(3)A 125/250VAC μ T105
10(2)A 125/250VAC μ T105
7(2)A 125/250VAC μ T105
▲ 10A 125/250VAC μ T85
- 接触电阻 CONTACT RESISTANCE: <50m Ω (INITIAL)
- 绝缘电阻 INSULATION RESISTANCE: $\geq 100\text{M}\Omega$ (DC500V/1MIN)
- 介电强度 DIELECTRIC STRENGTH: 1500V /0.5mA /1MIN
- 机械寿命 MECHANICAL LIFE: >50000 CYCLES
- 电气寿命 ELECTRICAL LIFE: >10000 CYCLES
- 端子手工焊接条件 SOLDER ABILITY OF TERMINAL: MAX350°C, 3S
- 操作力 OPERATION FORCE: 550 $\pm$ 150gf

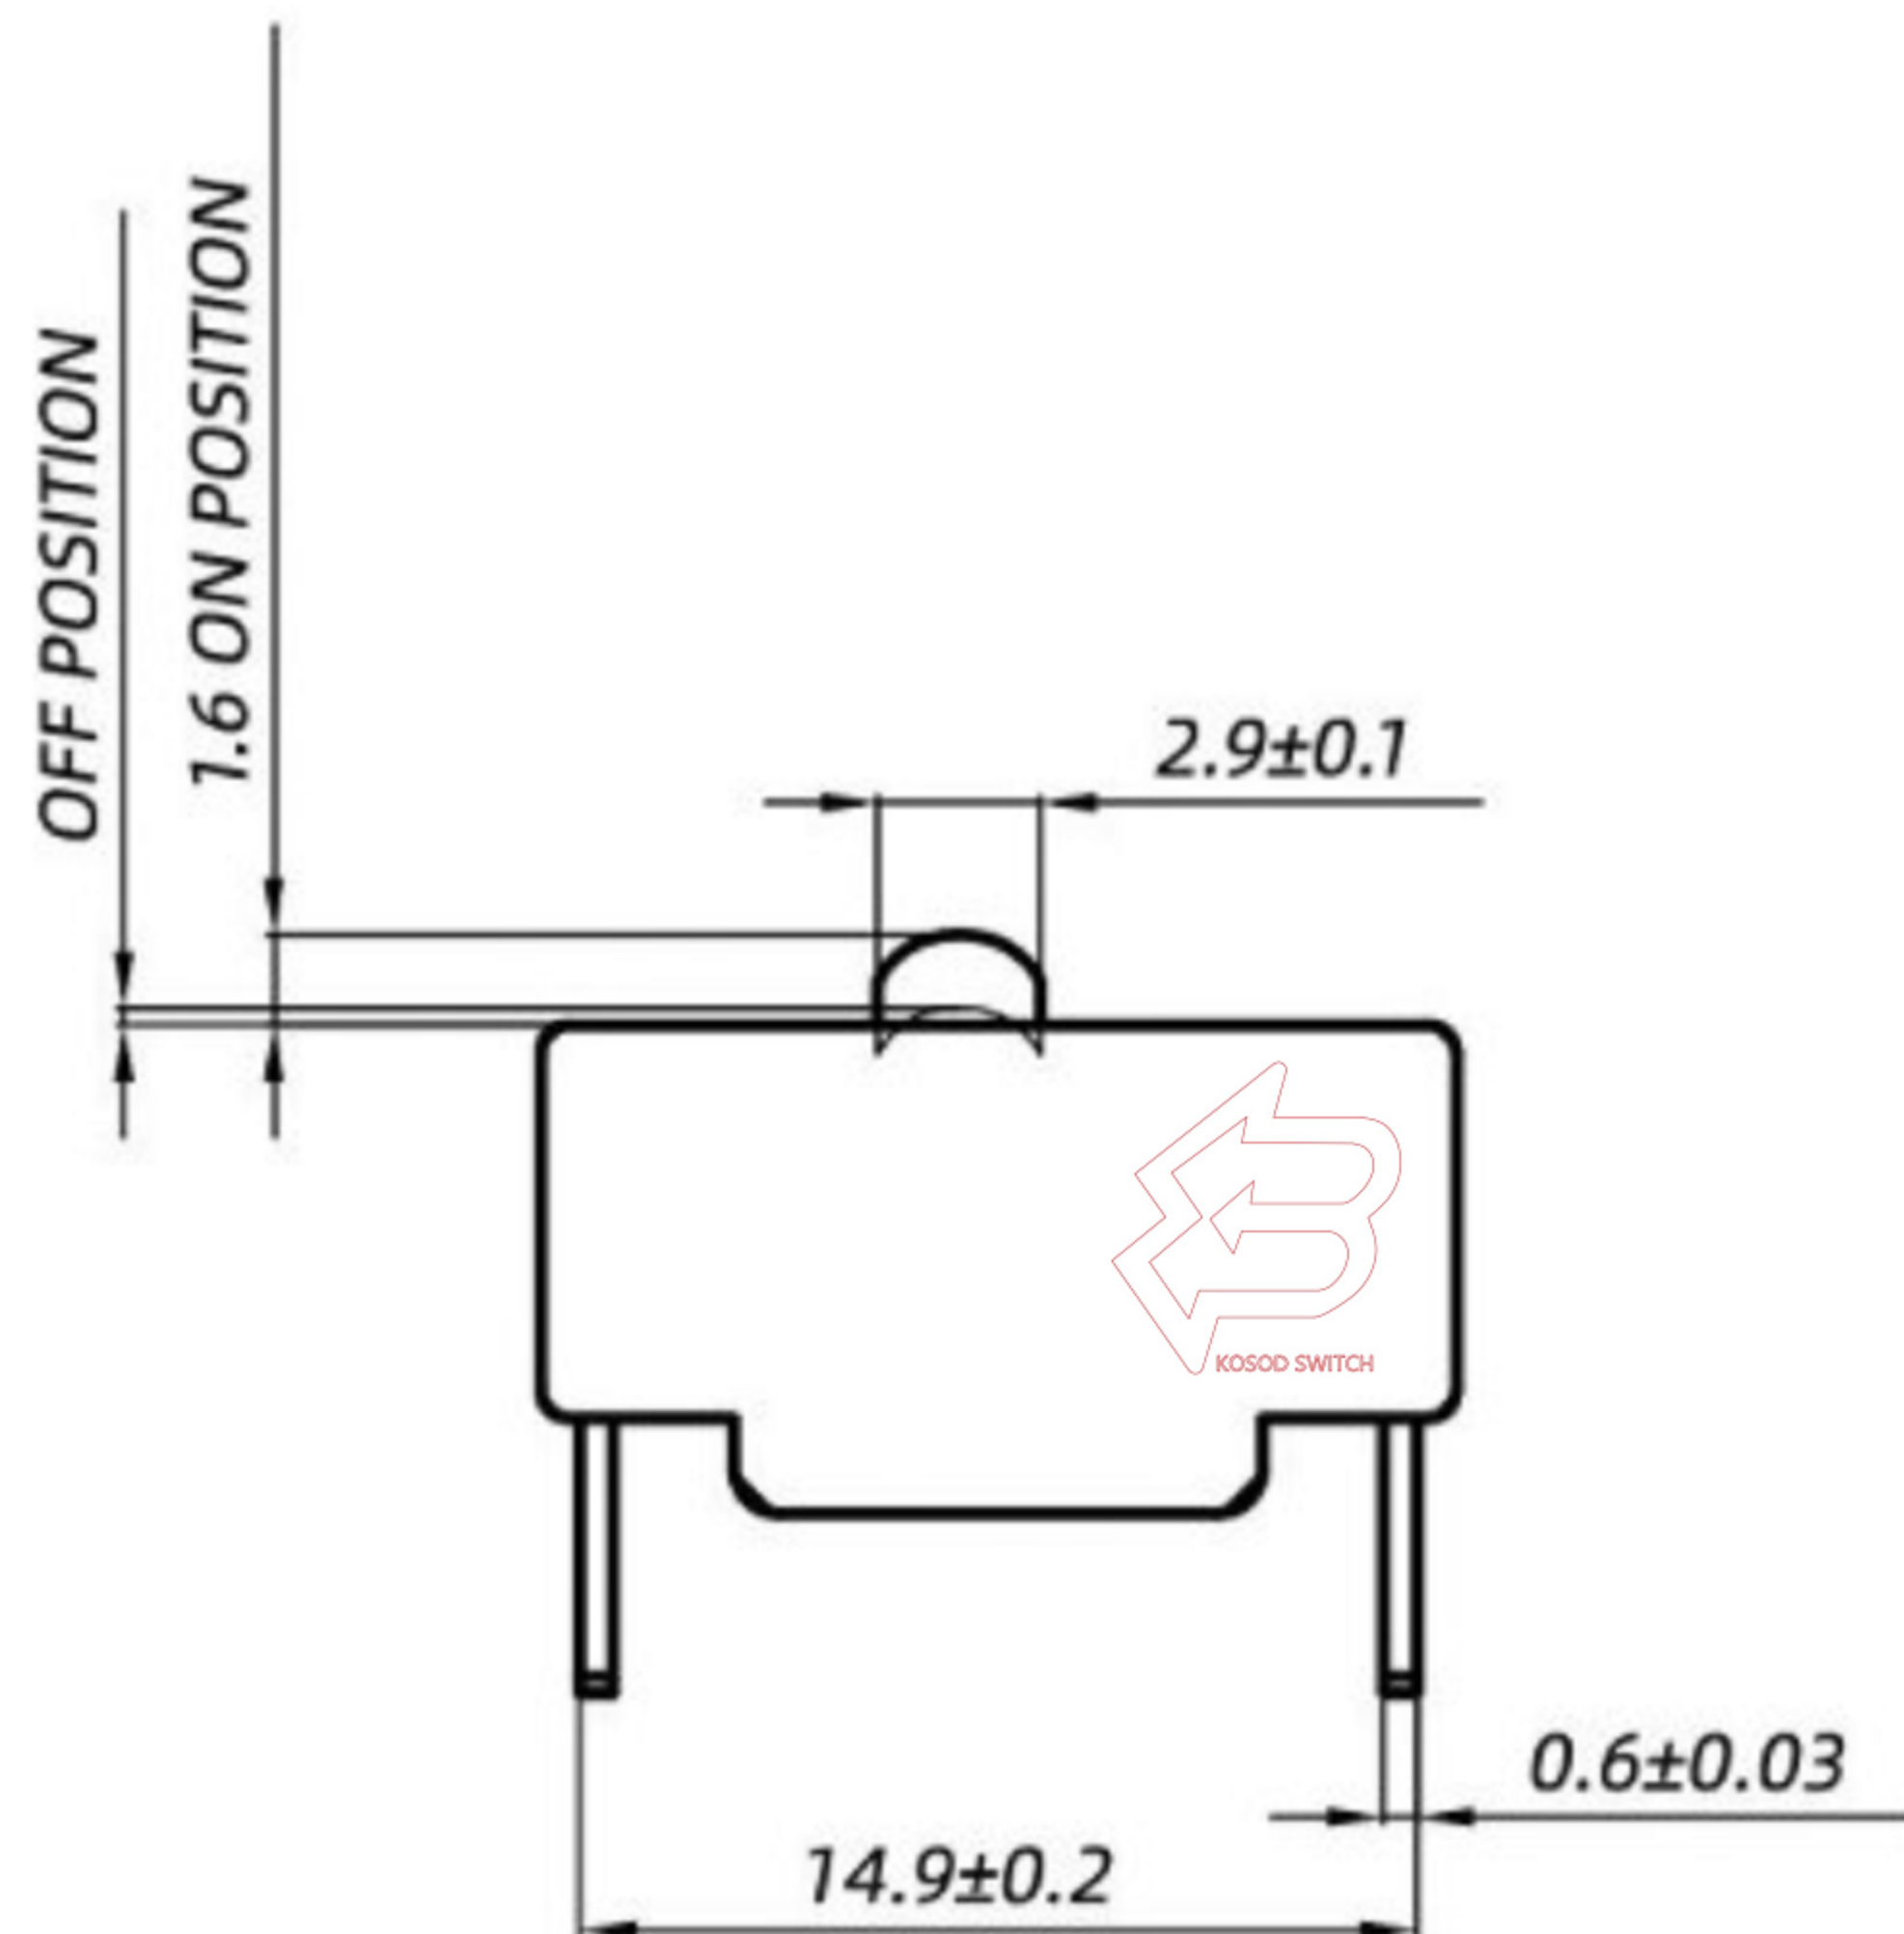

東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S

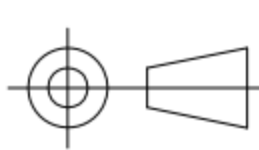

UNITS

MM

DRAWN BY: DATE

Ming Ming Zou 10/31/13

CHECKED BY: DATE

Ning Ning Su 10/31/13

APPROVED BY: DATE

Jia Xiang 10/31/13

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

SWITCH

MICRO SWITCH

GD-LXW-5-2ANS

SIZE

A4

VER

R