


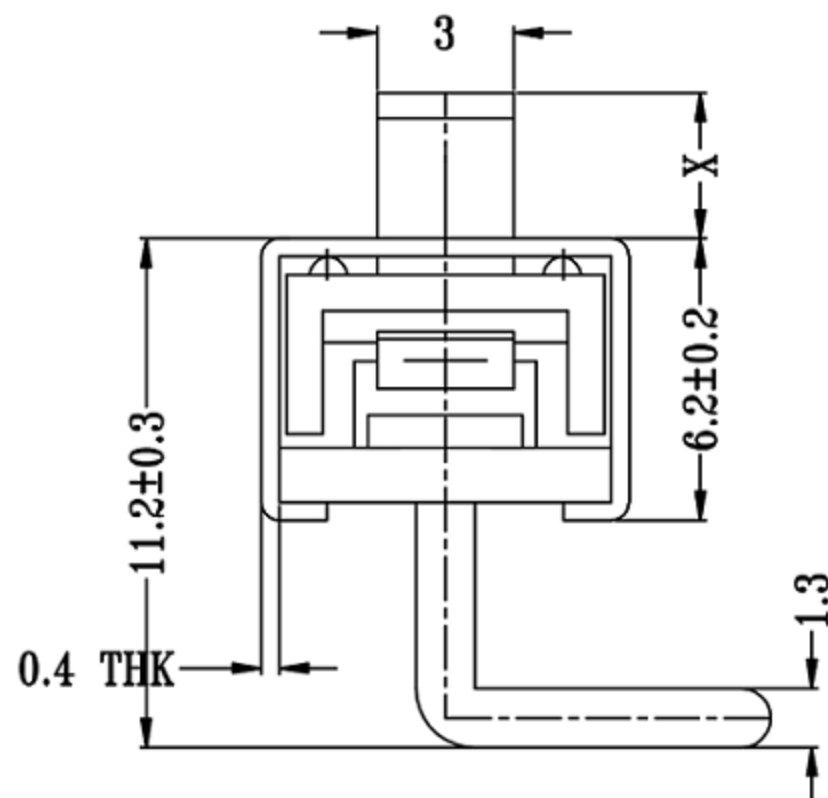
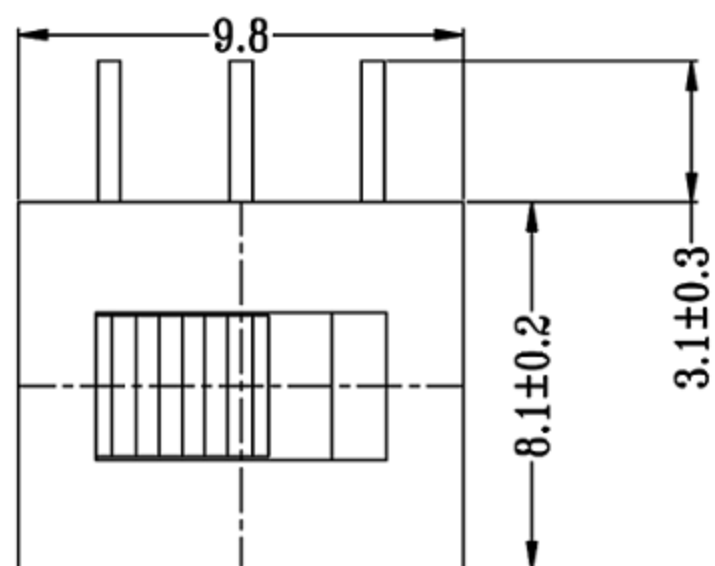


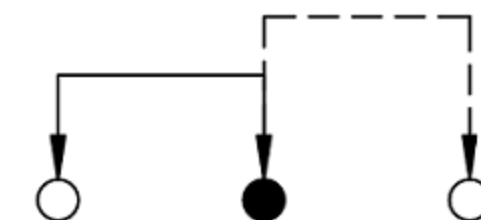

X(mm)
2mm
3mm
4mm
5mm
6mm
7mm
8mm
9mm

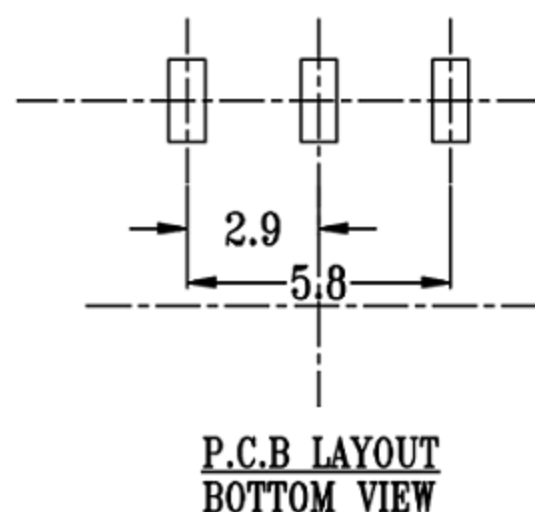

SCHEMATIC (NON-SHORTING)

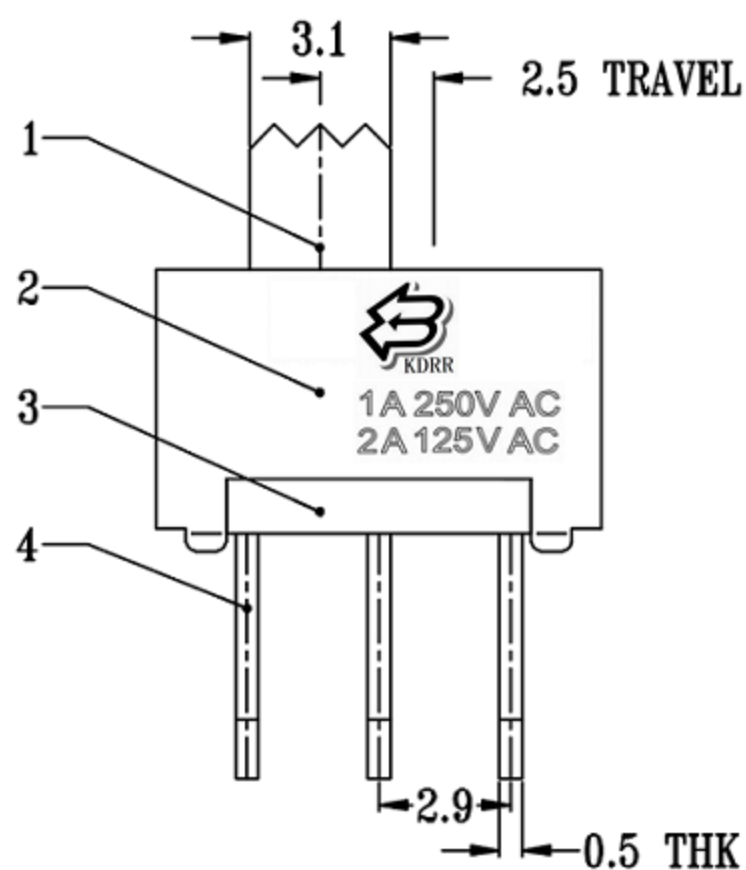

SPECIFICATION (INITIAL)

RATING:	1A 2A 125V 250 AC
CONTACT RESISTANCE:	Not more than 30mΩ
INSULATION RESISTANCE:	500MΩ at 1500V DC
WITHSTAND VOLTAGE:	AC 500V for 1 min
OPERATION FORCE:	300±100g
SWITCHING LIFE:	10000 Cycles(6-10c/m loading)

NO.	PARTS	MATERIALS	QTY	FINISH
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED
4	TERMINAL	BRASS	3	Ag PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	FRAME	STEEL STRIP	1	Ni PLATED
1	KNOB	POM	1	BLACK



東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Ming Ming Zou	11/19/14
CHECKED BY:	DATE
Ming Ning Su	11/19/14
APPROVED BY:	DATE
Jia Xiang	11/19/14

MAT'L	TITLE	MODLE	DWG NO.	PART NO.	SIZE
FINISH	SLIDE SWITCH		GD-SS-12E88-W-3P		A4
SCALE	1:1				VER
SHEET NO.	1 of 1				R2