
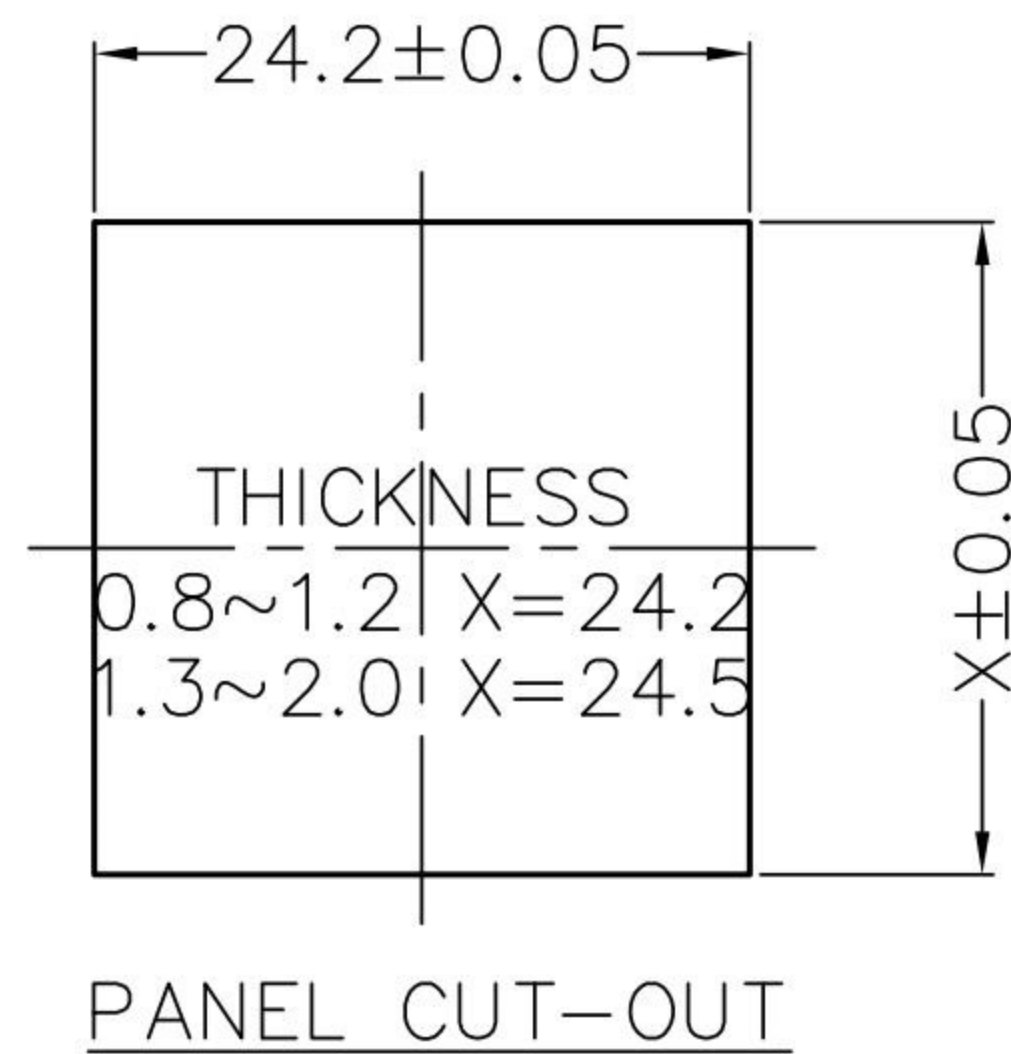


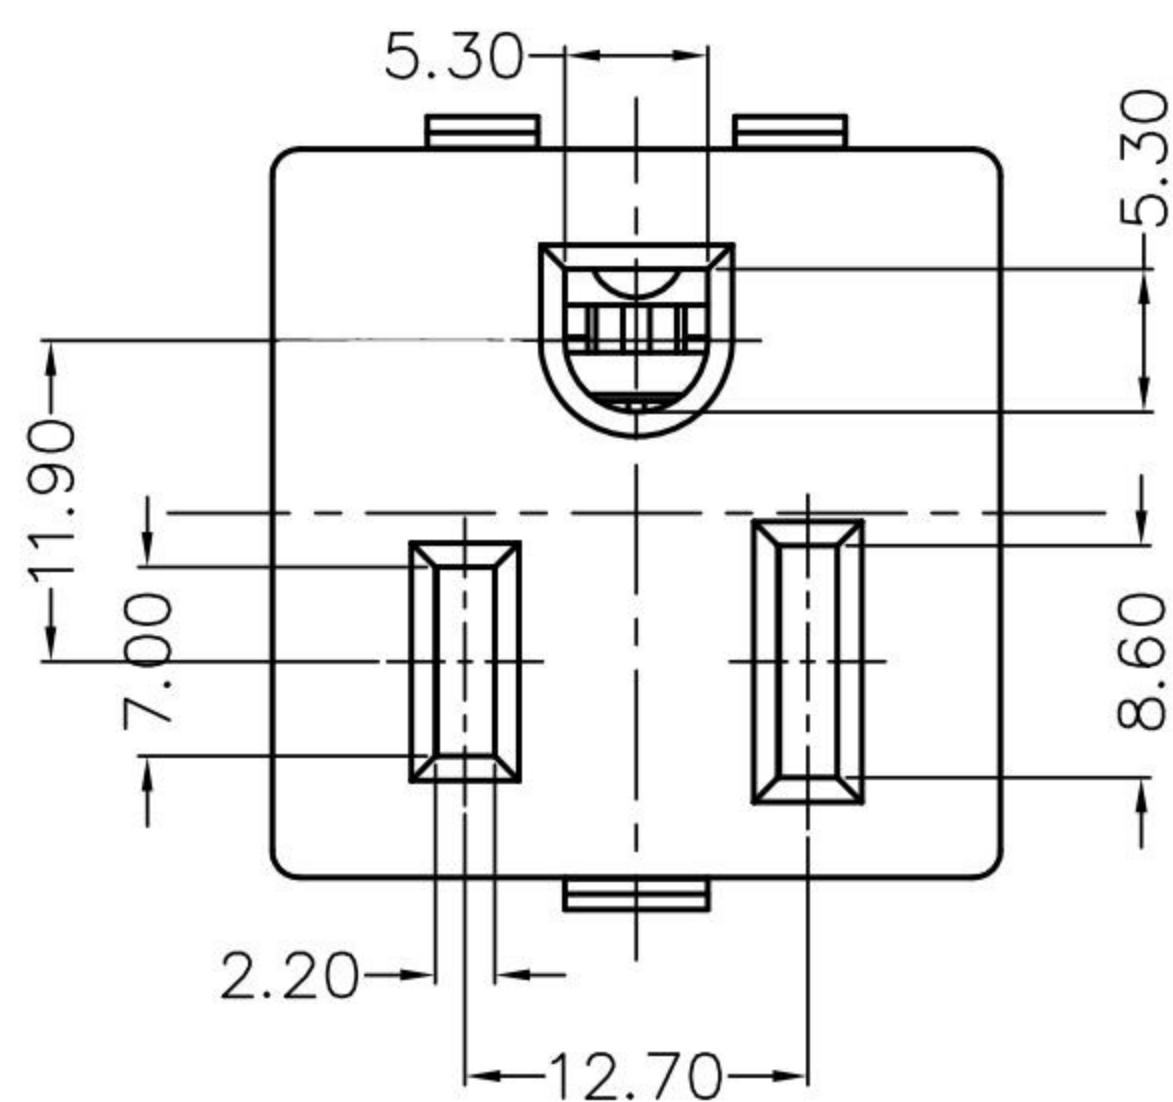

SPECIFICATION

A: MATERIAL:





- 1.CAP & HOUSING & COVER: PA(BLACK), UL 94V-0
- 2.DOOR: POM(WHITE), UL 94V-HB
- 3.TERMINAL(GROUND & LINE): COPPER ALLOY, NATURE
- 4.TERMINAL(NATURE): COPPER ALLOY, NICKEL PLATED

B: CHARACTERISTICS:

1. RATING: 15A 125V~ UL
2. INSULATION RESISTANCE: 100MΩ MIN, AT 500V DC
3. ELECTRIC STRENGTH: AC 2000V FOR ONE MINUTE

C: APPROVALS:

UL, CUL

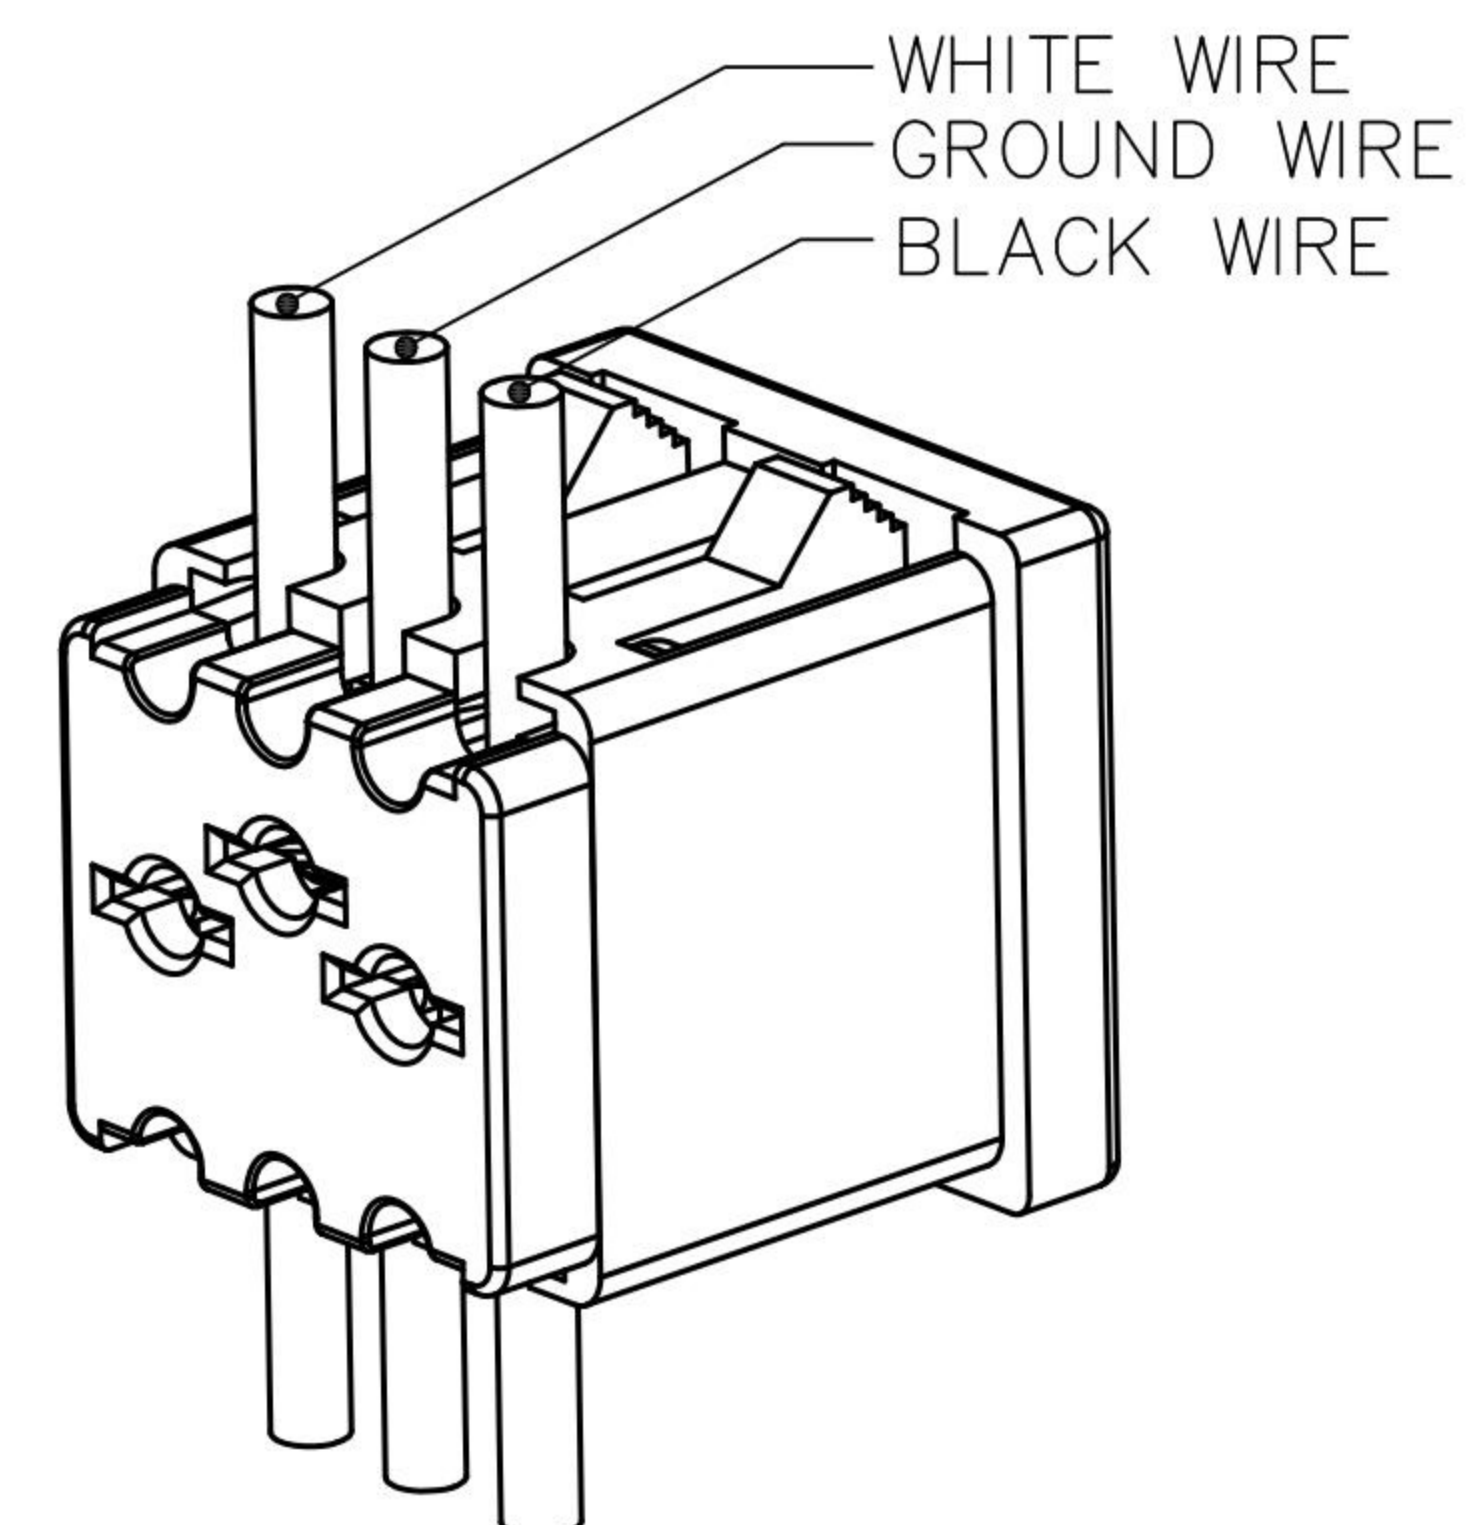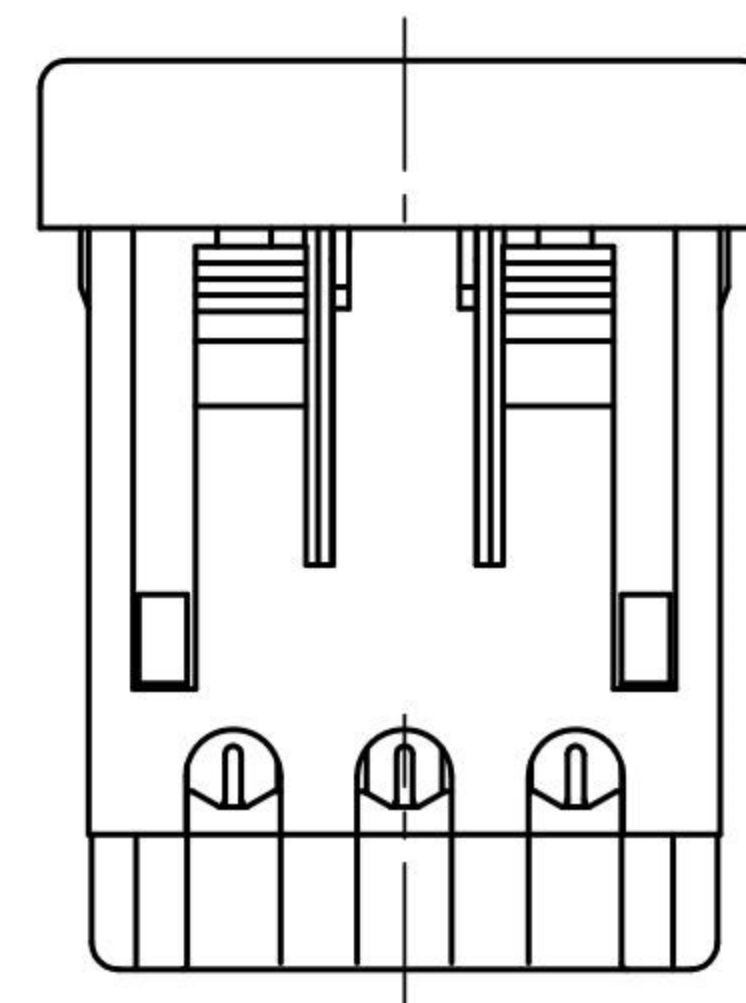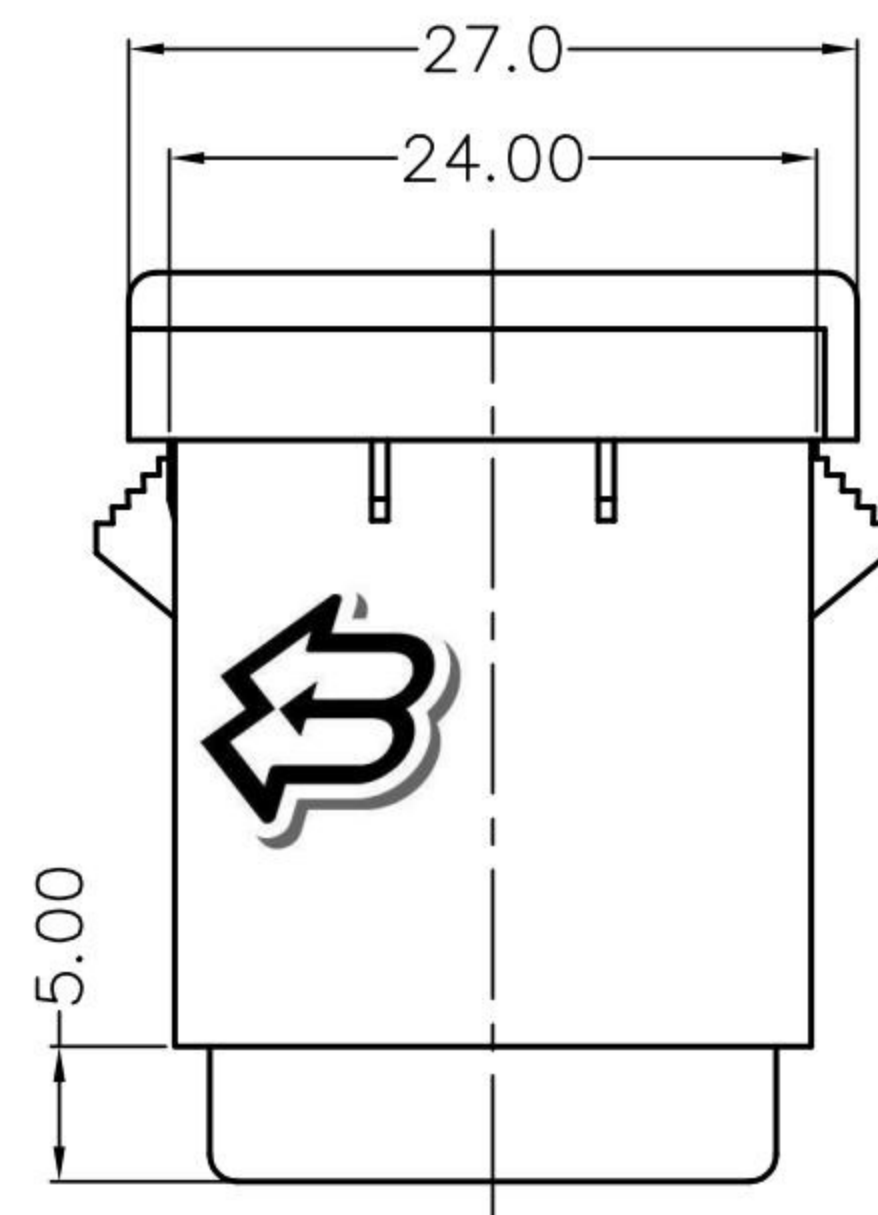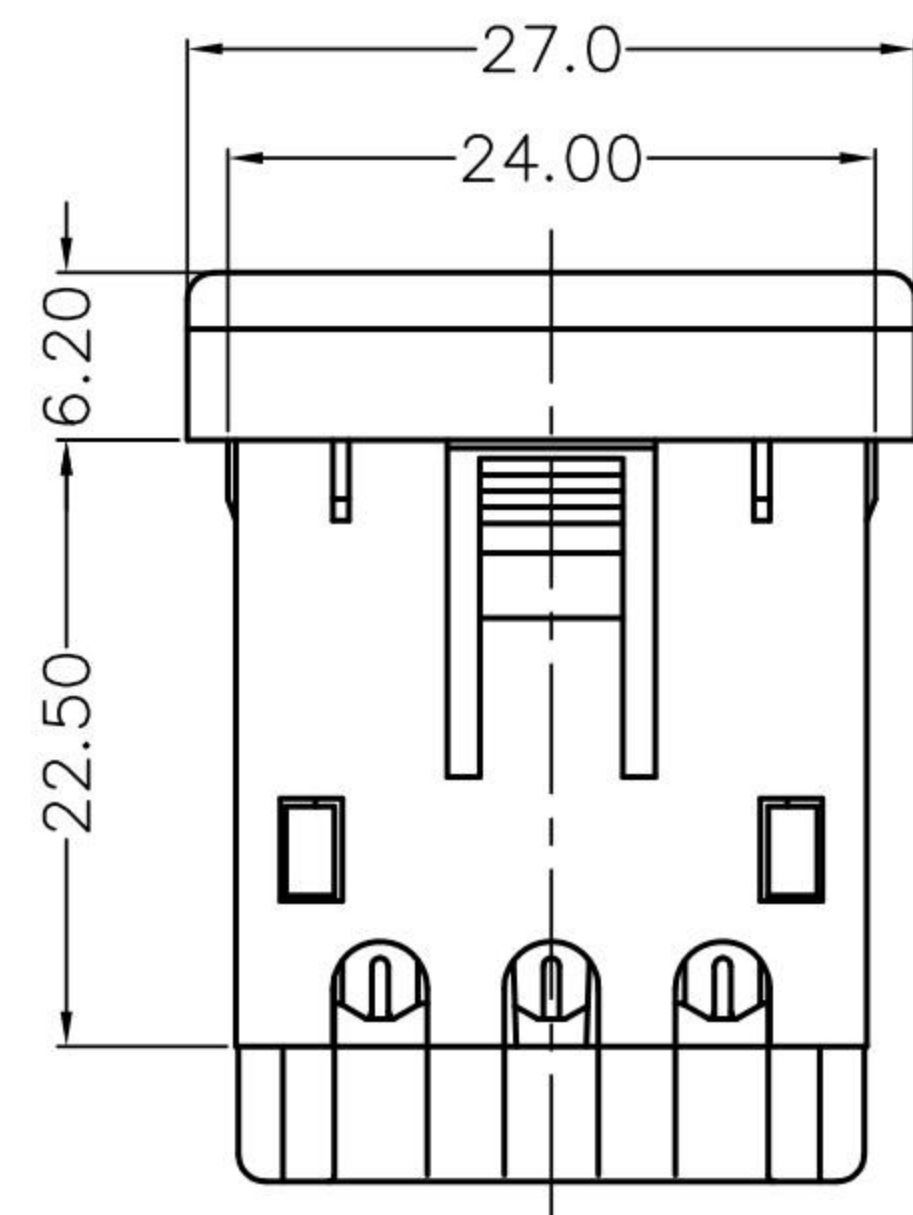

NOTE1: USE 14&16&18AWG SOLID COPPER WIRE ONLY

NOTE2: USE 4.8x0.5&0.8mm FAST-ON TAB ONLY




東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Ming Ming Zou 10/31/13

CHECKED BY: DATE

Ning Ning Su 10/31/13

APPROVED BY: DATE

Jia Xiang 10/31/13

MAT'L

FINISH

SCALE

SHEET NO.

TITLE SWITCH

MODLE AC POWER SOCKET

DWG NO. GD-BT-US2-D

PART NO.

SIZE

A4

VER

R

ITEM NO. DESCRIPTION DRAWN DATE