


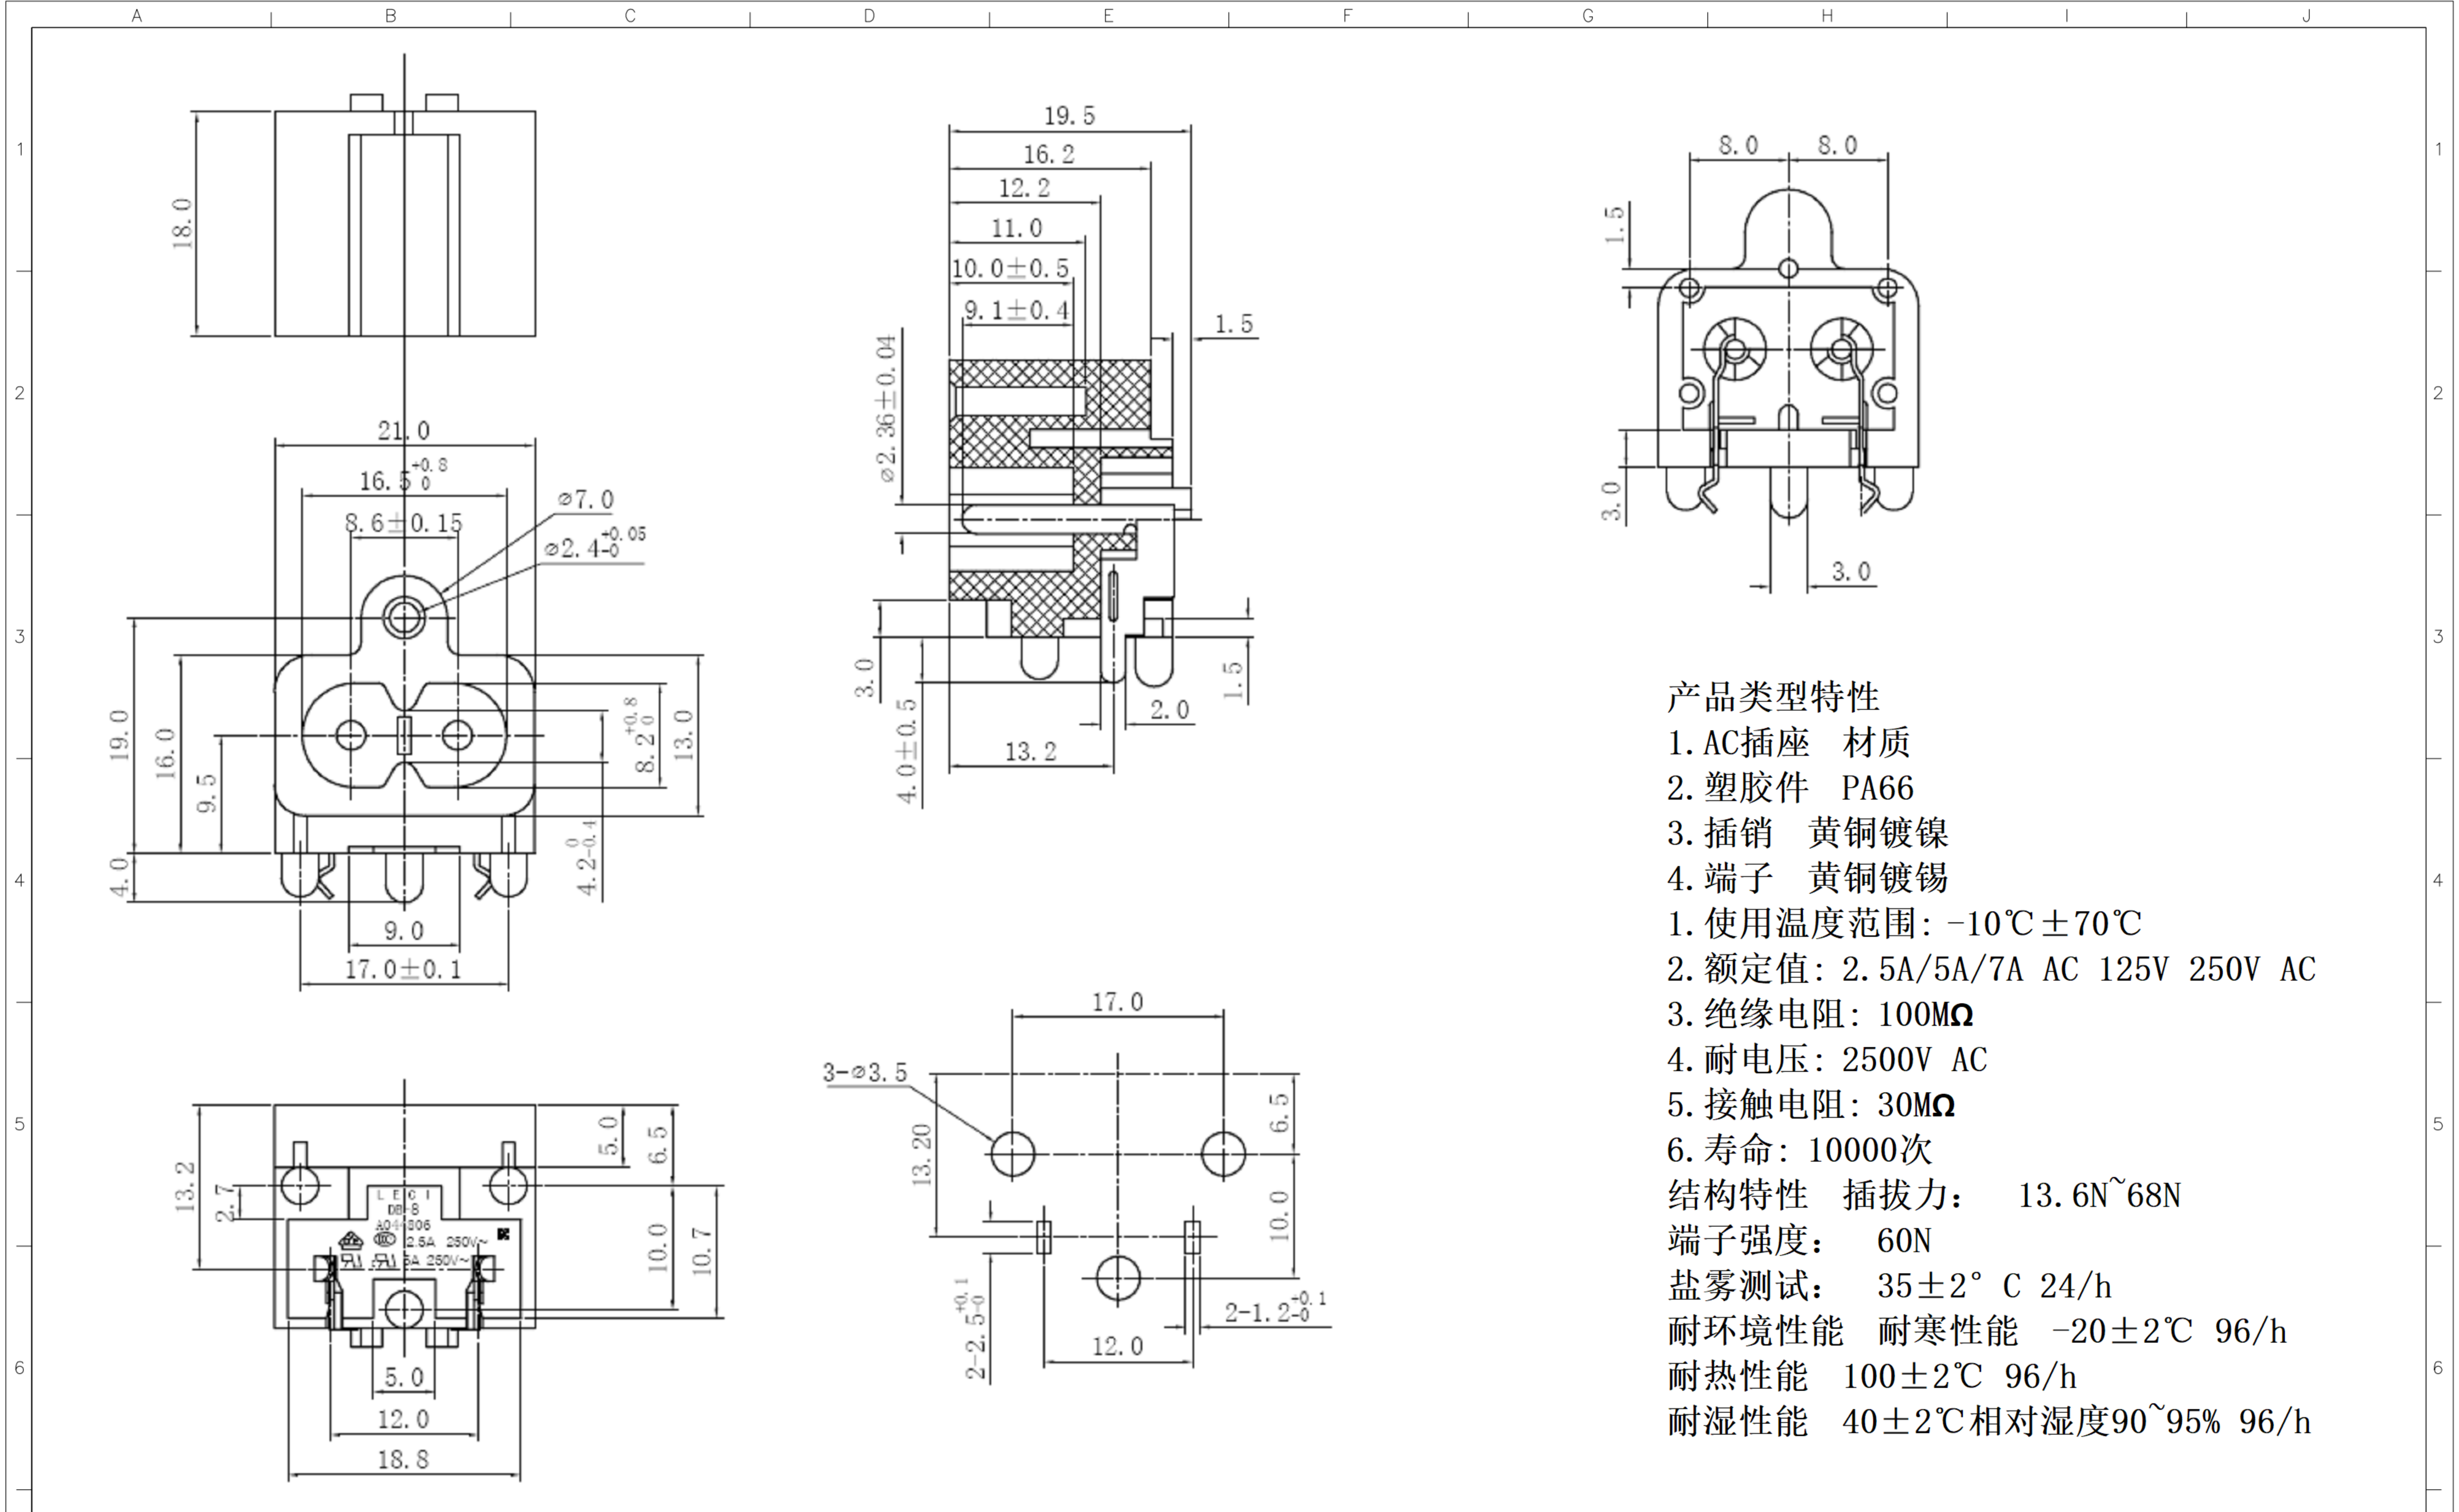

产品类型特性

- 1. AC插座 材质
- 2. 塑胶件 PA66
- 3. 插销 黄铜镀镍
- 4. 端子 黄铜镀锡
- 1. 使用温度范围: $-10^{\circ}\text{C} \sim 70^{\circ}\text{C}$
- 2. 额定值: 2.5A/5A/7A AC 125V 250V AC
- 3. 绝缘电阻: $100\text{M}\Omega$
- 4. 耐电压: 2500V AC
- 5. 接触电阻: $30\text{M}\Omega$
- 6. 寿命: 10000次
- 结构特性 插拔力: $13.6\text{N} \sim 68\text{N}$
- 端子强度: 60N
- 盐雾测试: $35 \pm 2^{\circ}\text{C}$ 24/h
- 耐环境性能 耐寒性能 $-20 \pm 2^{\circ}\text{C}$ 96/h
- 耐热性能 $100 \pm 2^{\circ}\text{C}$ 96/h
- 耐湿性能 $40 \pm 2^{\circ}\text{C}$ 相对湿度90~95% 96/h

7					 東莞市高迪電子有限公司 DONG GUAN GAO DI ELECTRONICS CO., LTD	DRAWN BY: DATE		MAT'L		TITLE	SWITCH	7								
						Ming Ming Zou	10/31/13													
						CHECKED BY: DATE														
						Ning Ning Su	10/31/13													
					TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S		UNITS	MM	APPROVED BY: DATE		SCALE	1 : 1	DWG NO.	GD-DB-6-3T	SIZE				
				Jia Xiang						10/31/13	A4									
	ITEM NO.	DESCRIPTION	DRAWN	DATE								SHEET NO.	1 of 1	PART NO.		VER				
	A	I	B	I	C	I	D	I	E	I	F	I	G	I	H	I	I	I	I	J