



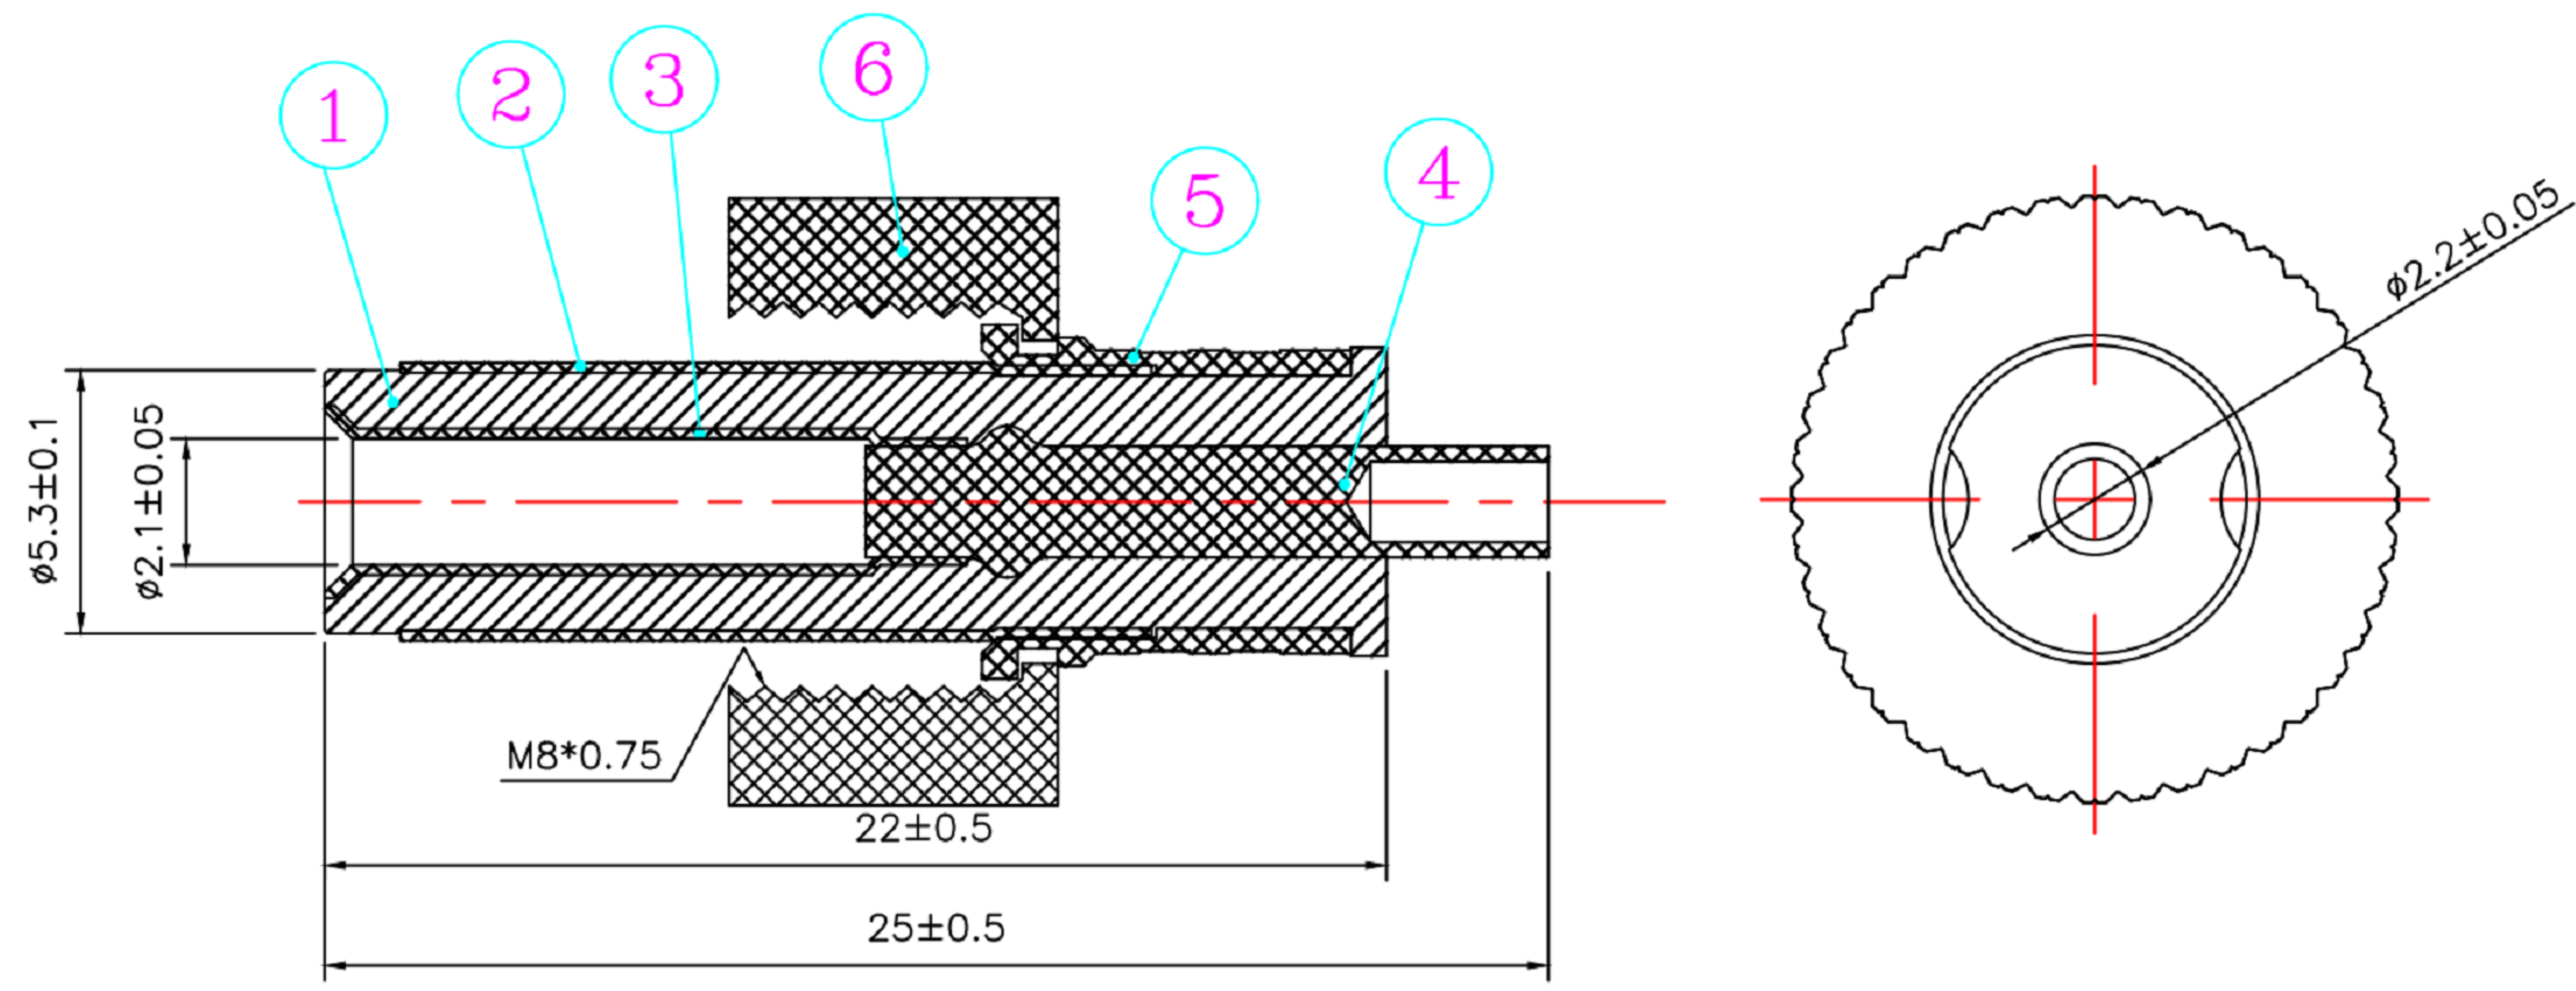


SPECIFICATION

- 1. Rating : DC 24V 5.0A ;
- 2. Contact resistance : $\leq 30m\Omega$;
- 3. Insulation resistance : $\geq 100M\Omega$;
- 4. Withstand voltage : 500VAC ;
- 5. Insertion force : 3-30N;
extraction force : 3-30N;
- 6. life test : 5,000 cycles °

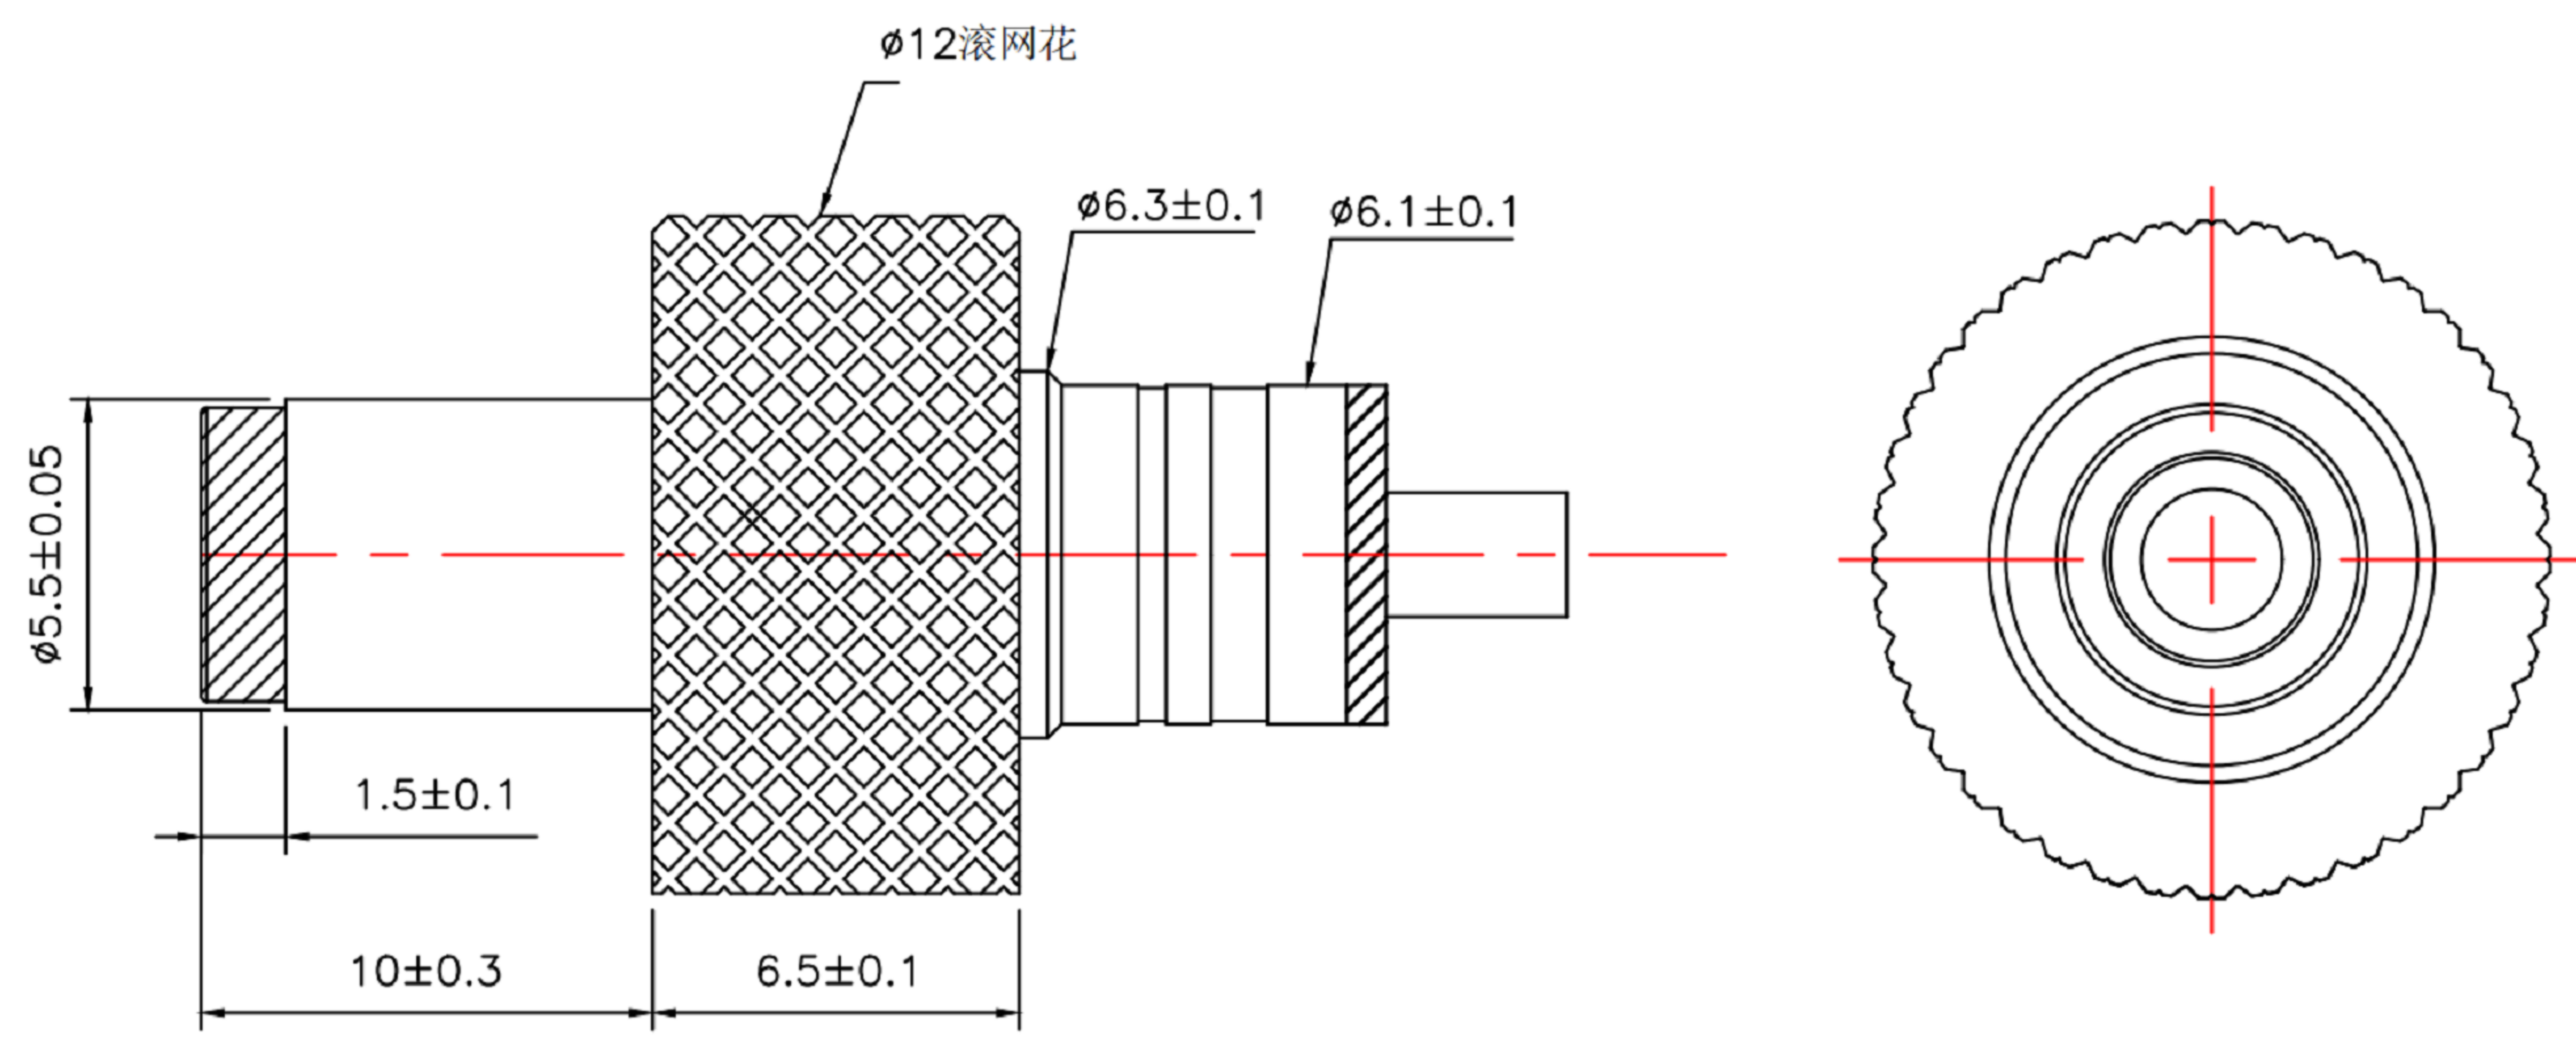

- Technology Request:
- 1. Outlook: No burr, no hurt.
 - 2. Electronic performance:
 - a: Insulation resistance: Above DC500V/100M Ω ;
 - b: Endure voltage: AC500V at 1 minute;
 - c: Contact resistance: Under 30m Ω ;
 - 3. Insertion force & withdrawal force: 0.3–3kgf.
 - 4. Salt spray test: 24H.
 - 5. Meet RoHS.
 - 6. Remark * is important specification.

 **东莞市高迪电子有限公司**
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :		Up to 5	± 0.2	3RD. ANGEL'S		UNITS	MM
		Above 5 ~ 15	± 0.3				
		Above 15 ~ 30	± 0.4				
		Above 30 ~ 50	± 0.5				
		Angle	$\pm 0.3^\circ$				

DRAWN BY:		DATE	MAT'L		TITLE	JACK
Ming Ming Zou		6/8/23				
CHECKED BY:		DATE	FINISH		MODLE	DC POWER PLIG
Ning Ning Su		6/8/23				
APPROVED BY:		DATE	SCALE	1 : 1	DWG NO.	GD-DC-CT-5521C250
Jia Xiang		6/8/23	SHEET NO.	1 of 1	PART NO.	
						SIZE A4
						VER R4

4	更新材質	Jack	050420
3	更新尺寸	Jack	121119
2	更新尺寸標示位置	Jack	082719
1	更新尺寸	Jack	080519
ITEM NO.	DESCRIPTION	DRAWN	DATE