

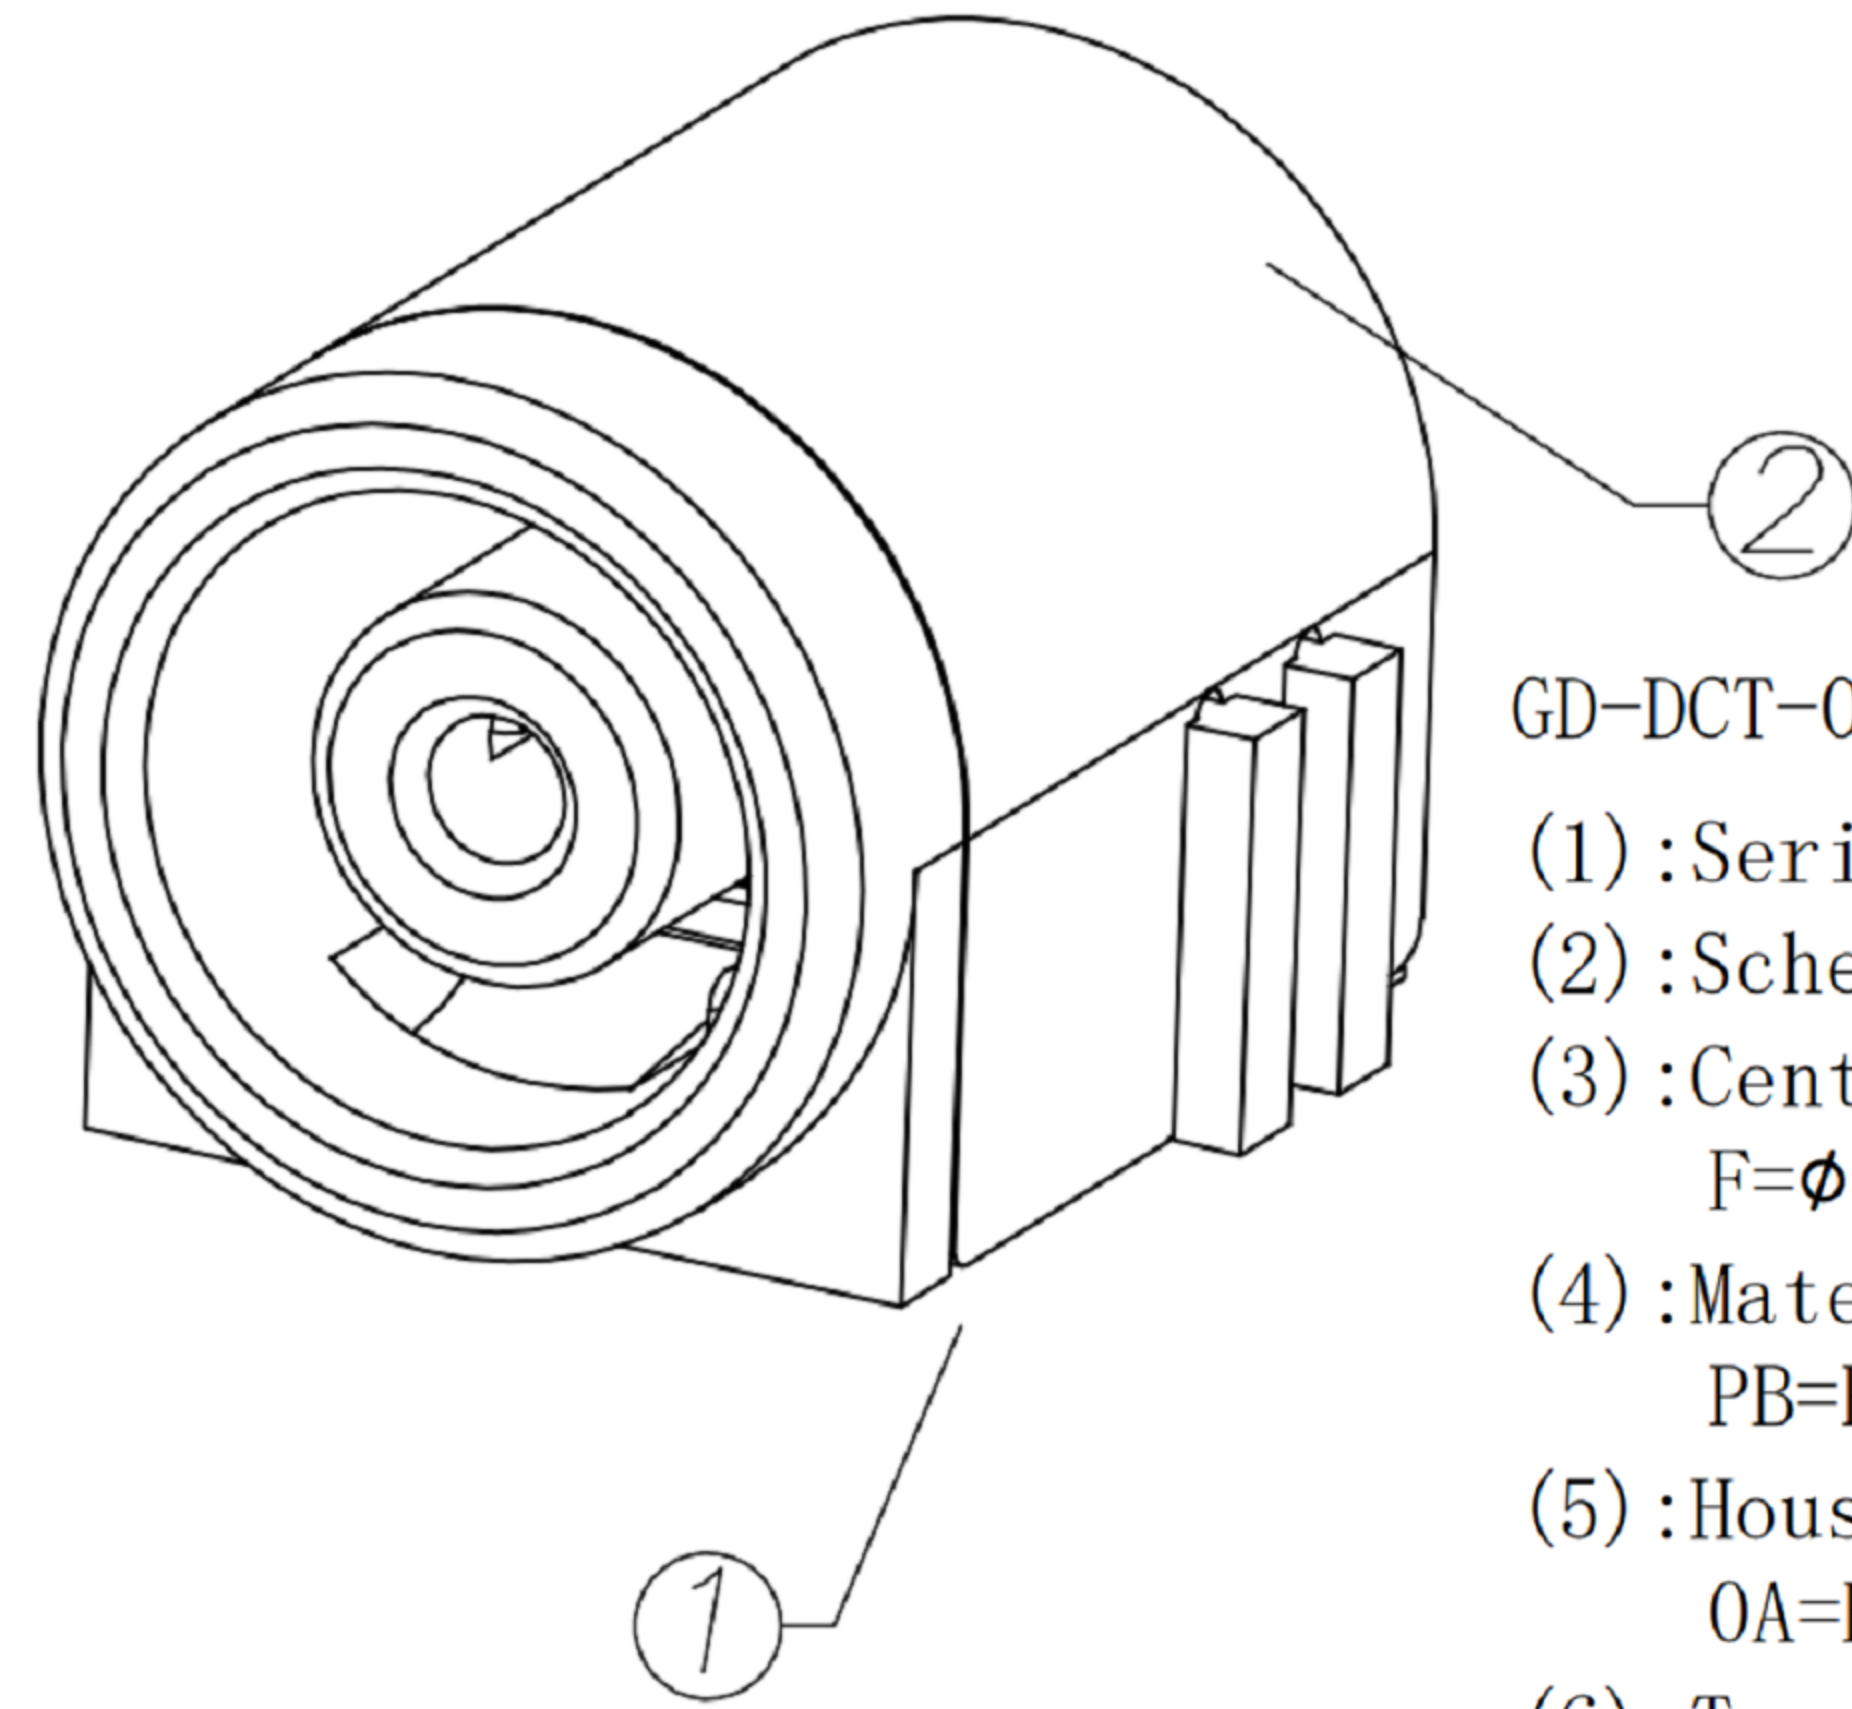
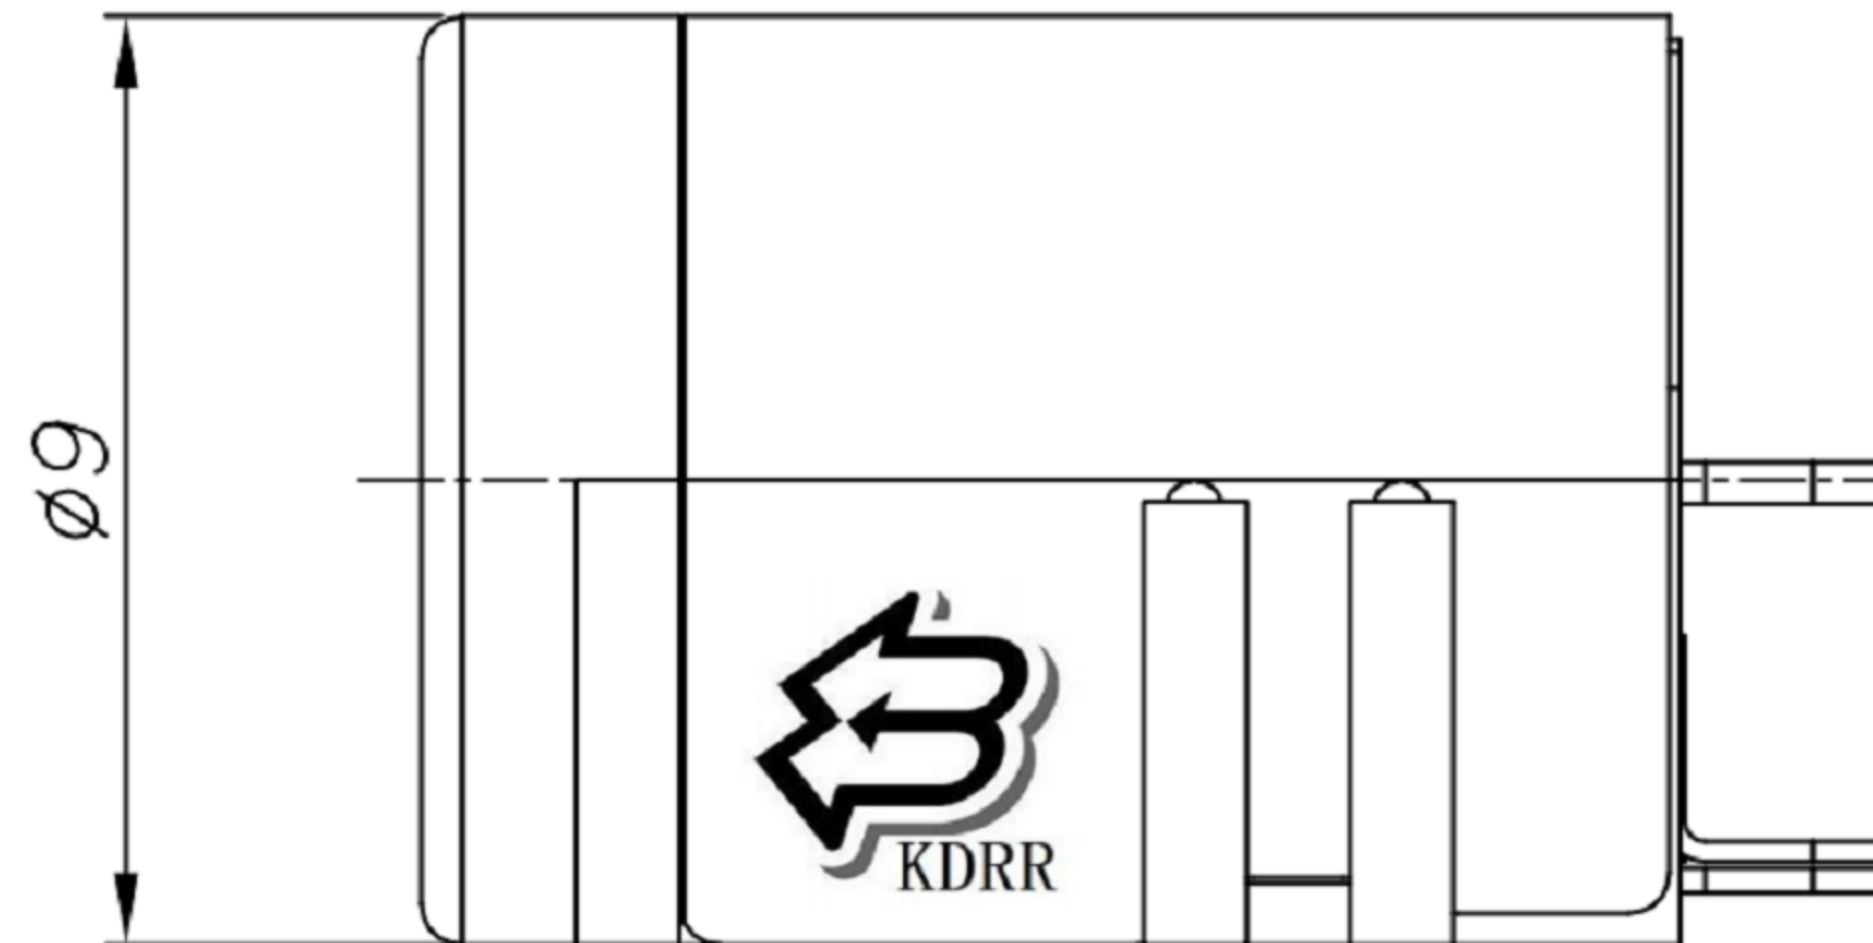
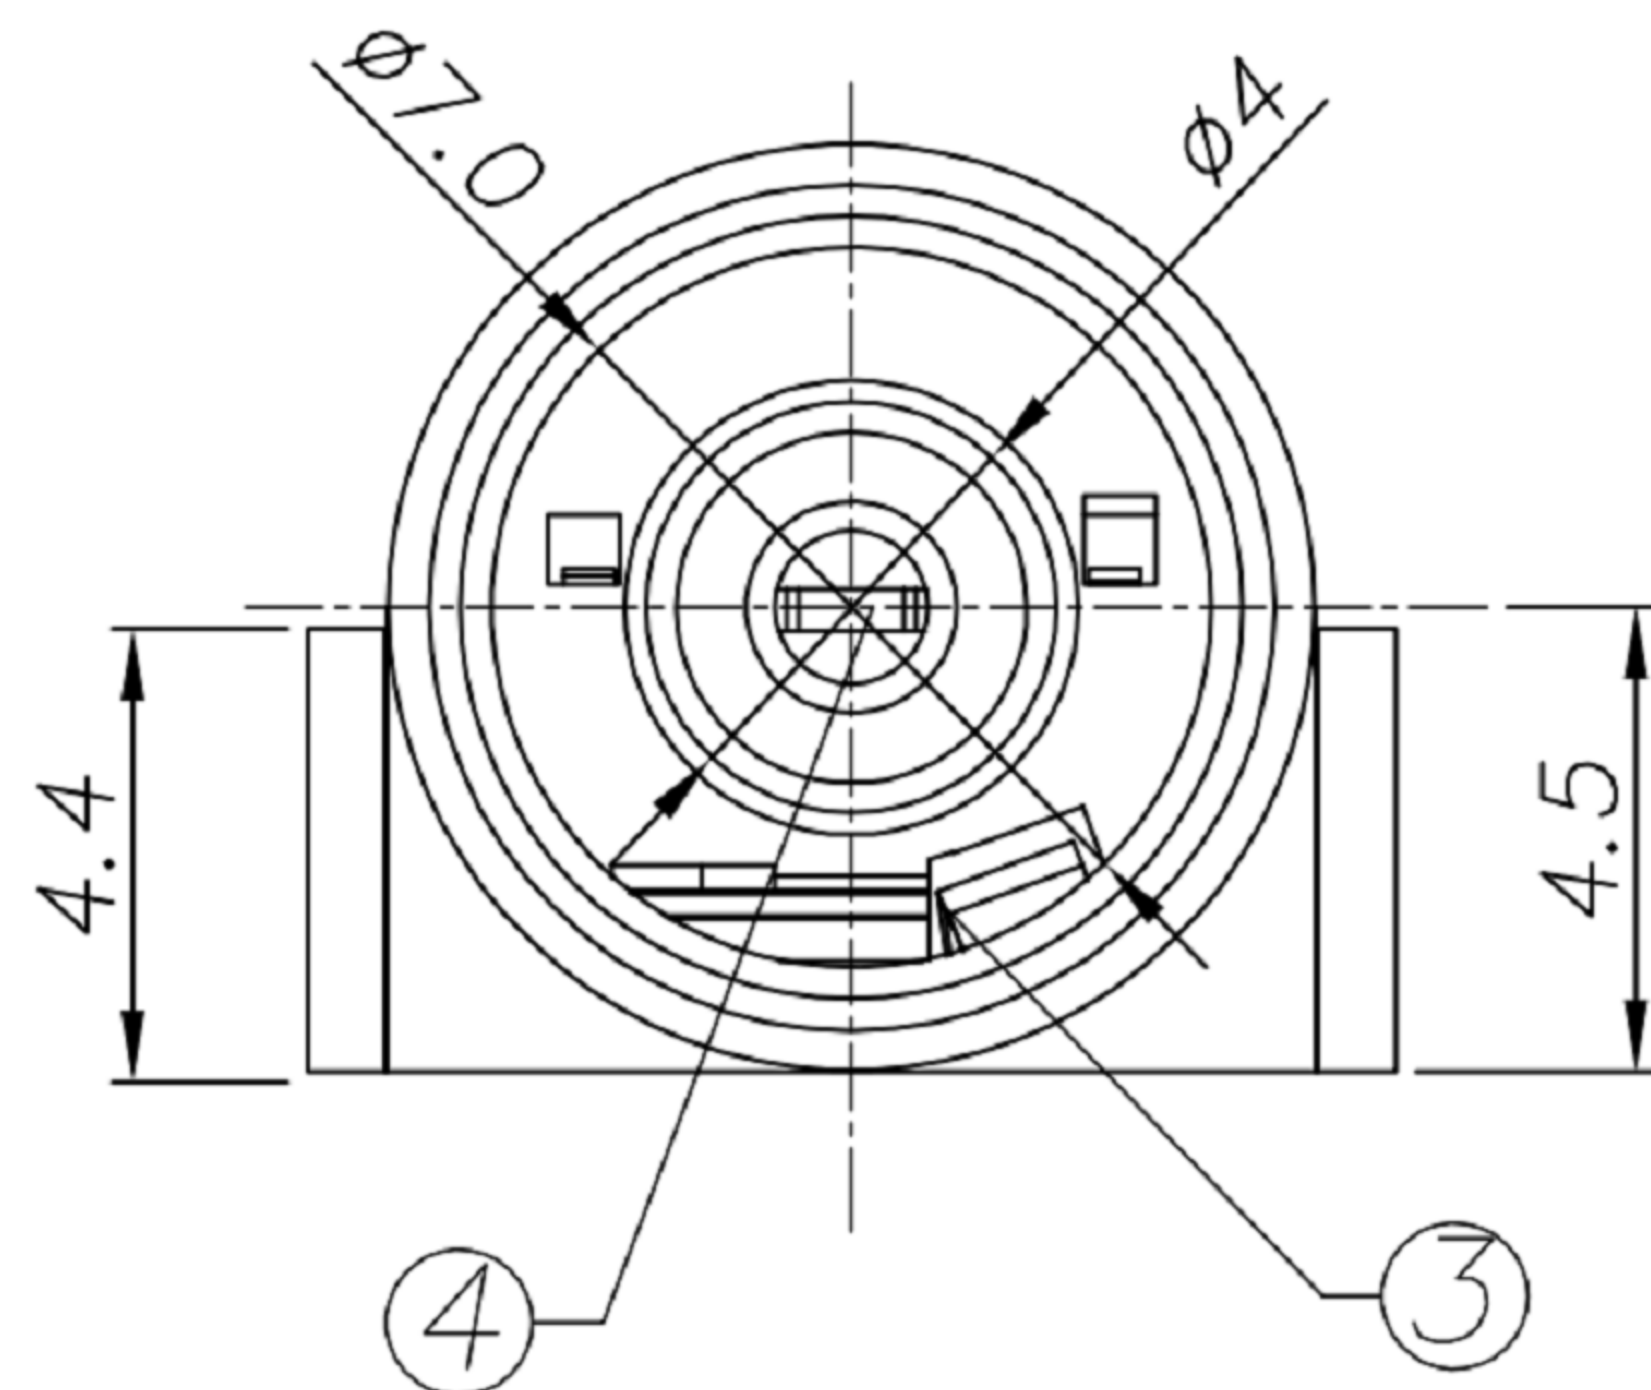


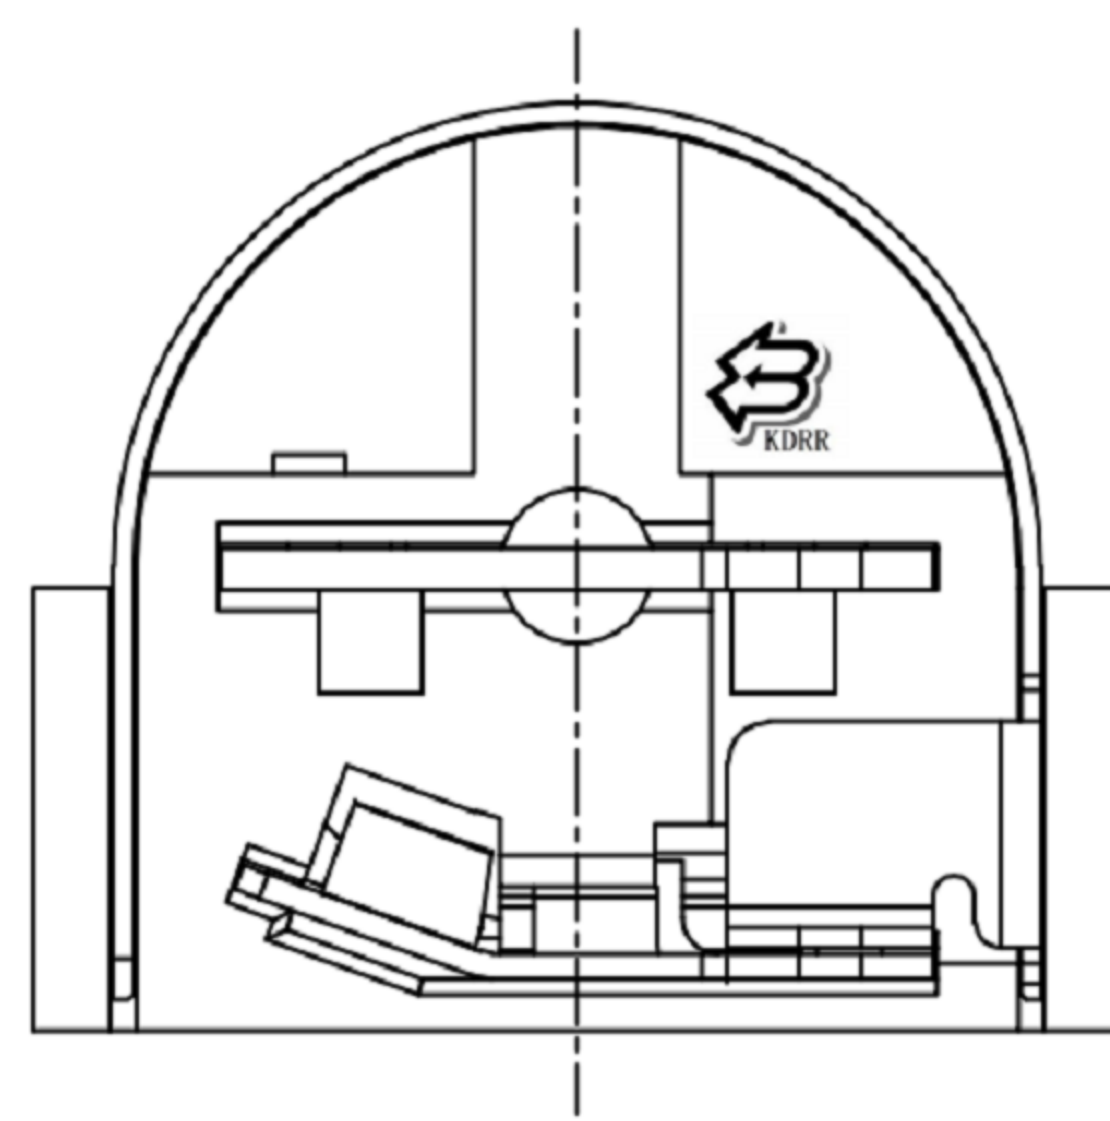


- GD-DCT-01820
- (1): Series No.
 - (2): Schematic option: B
 - (3): Center pin diameter F=1.4
 - (4): Material of housing PB=PBT
 - (5): Housing color: OA=Black
 - (6): Terminal plating: T=Tin plating
 - (7): Special option: H=Halogen Free
 - (8): Packing mode: 4=Bag packing

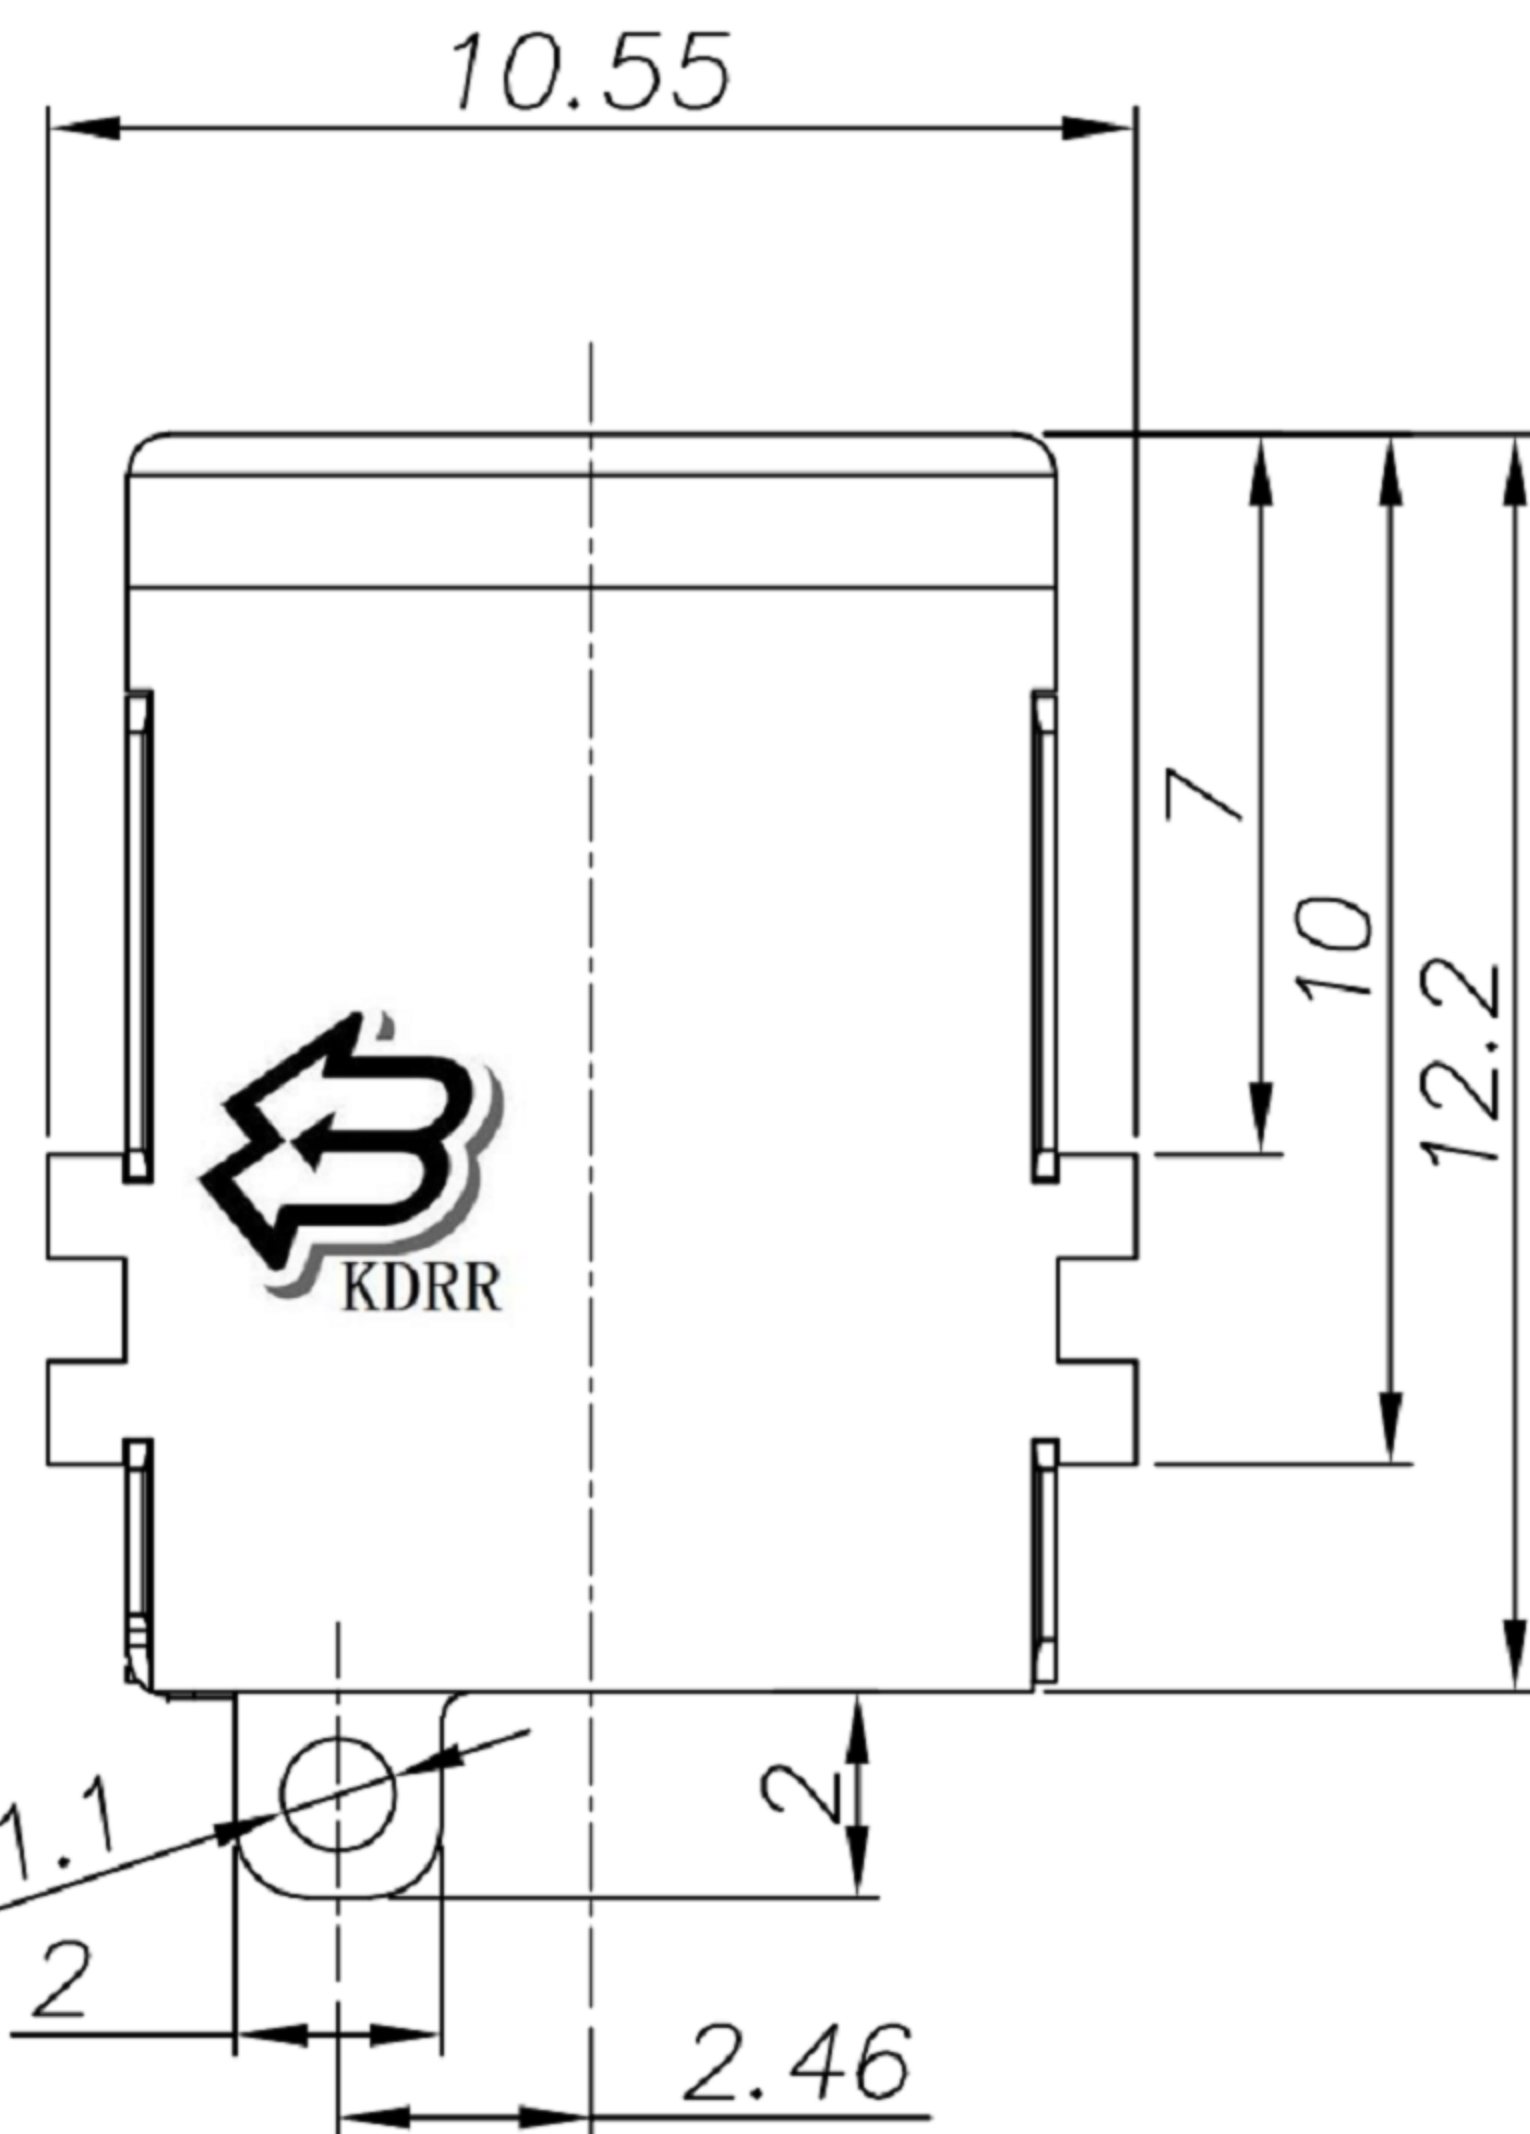


SPECIFICATION

- 1. Rating : DC 20V 5A;
- 2. Contact resistance: $\leq 50m\Omega$;
After test: $\leq 100m\Omega$;
- 3. Insulation resistance: $\geq 100M\Omega$ (DC500V);
After test: $\geq 50M\Omega$
- 4. Withstand voltage: 500VAC ;

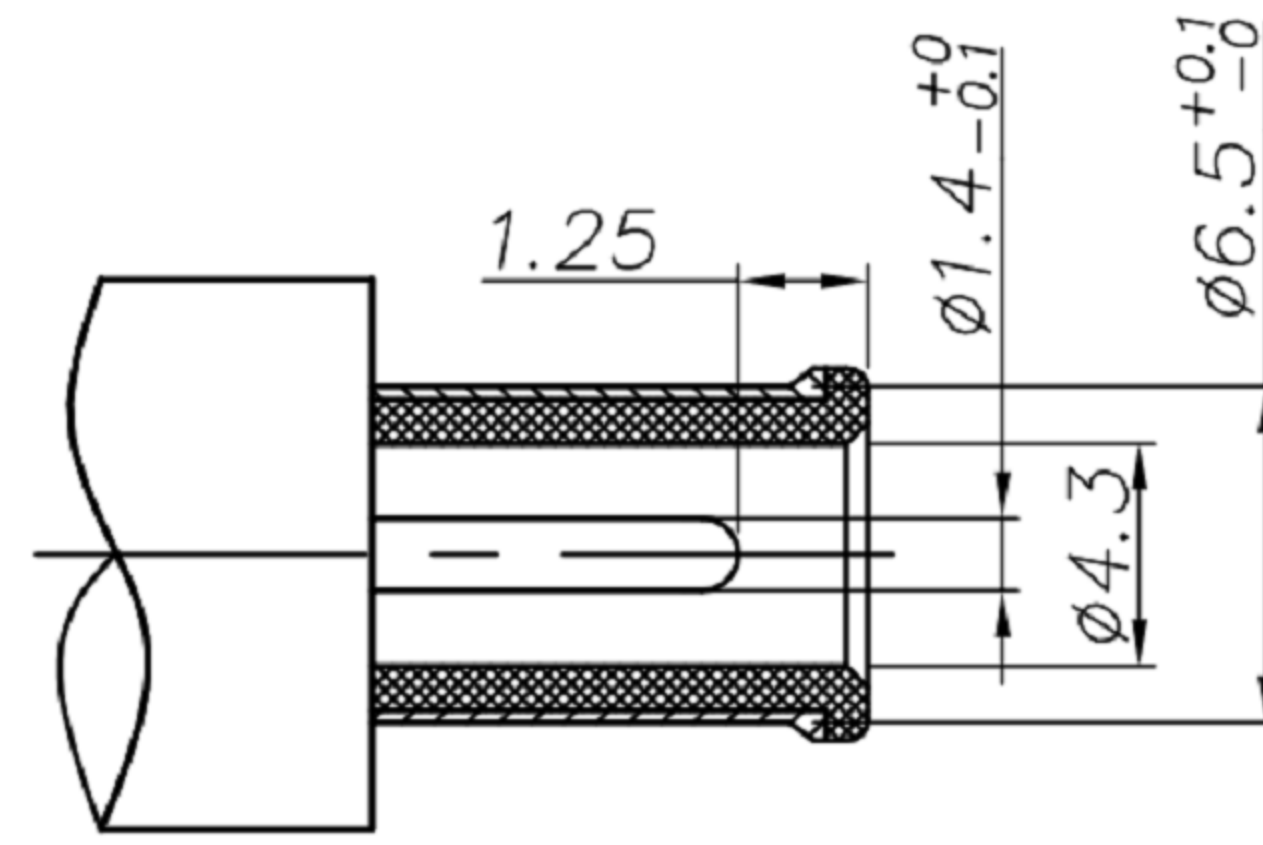

DC MATE PLUG

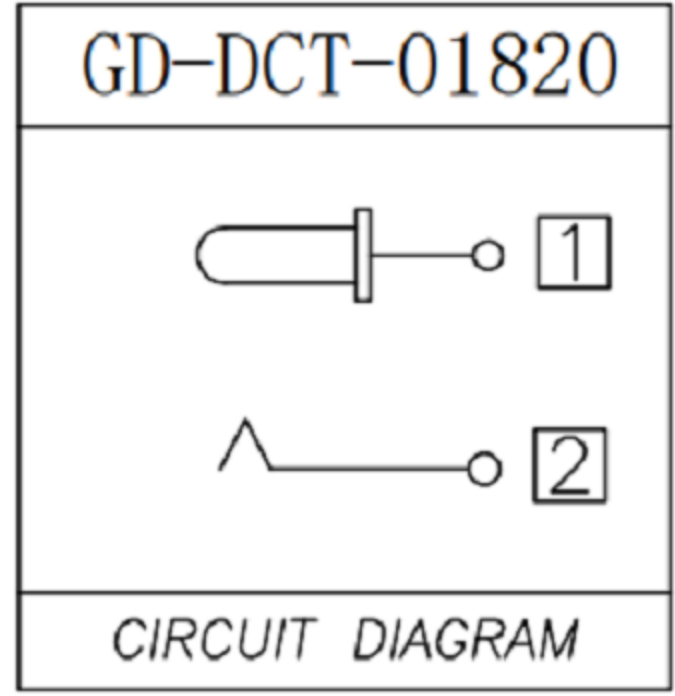

④	Center terminal	①	1	Phosphor Bronze	Tin plating
③	Tip spring	②	1	Phosphor Bronze	Tin plating
②	Shell		1	Brass	Ni plating
①	Housing		1	PBT, UL94V-0, BLACK	Halogen Free
NO.	DESCRIPTION	QTY	MATERIAL		PLATING

4	更新材質	Jack	050420
3	更新尺寸	Jack	121119
2	更新尺寸標示位置	Jack	082719
1	更新尺寸	Jack	080519
ITEM NO.	DESCRIPTION	DRAWN	DATE




东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Ming Ming Zou	6/8/23			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK
Ning Ning Su	6/8/23			
APPROVED BY:	DATE	SCALE	DWG NO.	GD-DCT-01820
Jia Xiang	6/8/23	1:1		
SHEET NO.	1 of 1	PART NO.		
				SIZE
				A4
				VER
				R4