




3. 电路简图



2. 认证:

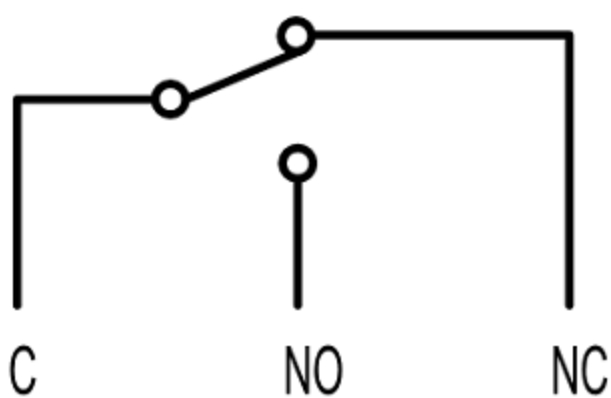

0.1A 125/250VAC
0.1A 48VDC
3A 12VDC
40T130 μ 1E5



0.1A 250VAC
0.1A 48VDC
3A 36VDC
40T130 μ 5E4

1. 技术参数 (Technical Parameters)

序号	主要技术参数 (Main Technical Parameters)
1	电气额定值(Electrical Rating): 0.1A 125/250VAC;3A/12VDC
2	环境温度(Ambient temperature): 40T130
3	电气寿命(Electrical lifetime): 5E4 cycles
4	操作力(Operating force): 3.0N MAX
5	自由位置(OP): 7.7 $\pm$ 0.3mm (推动子上测)
6	动作位置(OP): 7.2 $\pm$ 0.5mm (推动子上测)
7	接触电阻(Contact Resistance): $\leq$ 50m Ω (不带线)
8	耐压(Withstand Voltage): 脚与脚500V/60S/5mA, 脚与壳1500V/60S/5mA
9	绝缘电阻(Insulation Resistance): $\geq$ 100M Ω (Test Voltage 500VDC)
10	防护等级: IP67




东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 $\pm$ 0.2
Above 5 ~ 15 $\pm$ 0.3
Above 15 ~ 30 $\pm$ 0.4
Above 30 ~ 50 $\pm$ 0.5
Angle $\pm$ 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE
Ming Ming Zou 07/23/13
CHECKED BY: DATE
Ning Ning Su 07/23/13
APPROVED BY: DATE
Jia Xiang 07/23/13

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

Waterproof micro movement

Waterproof micro movement

GD-FSK-20-241

SIZE

A4

VER

R2

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	公差及料號更新	Jack	072313
1	圖面更新	Frank Wu	021012