


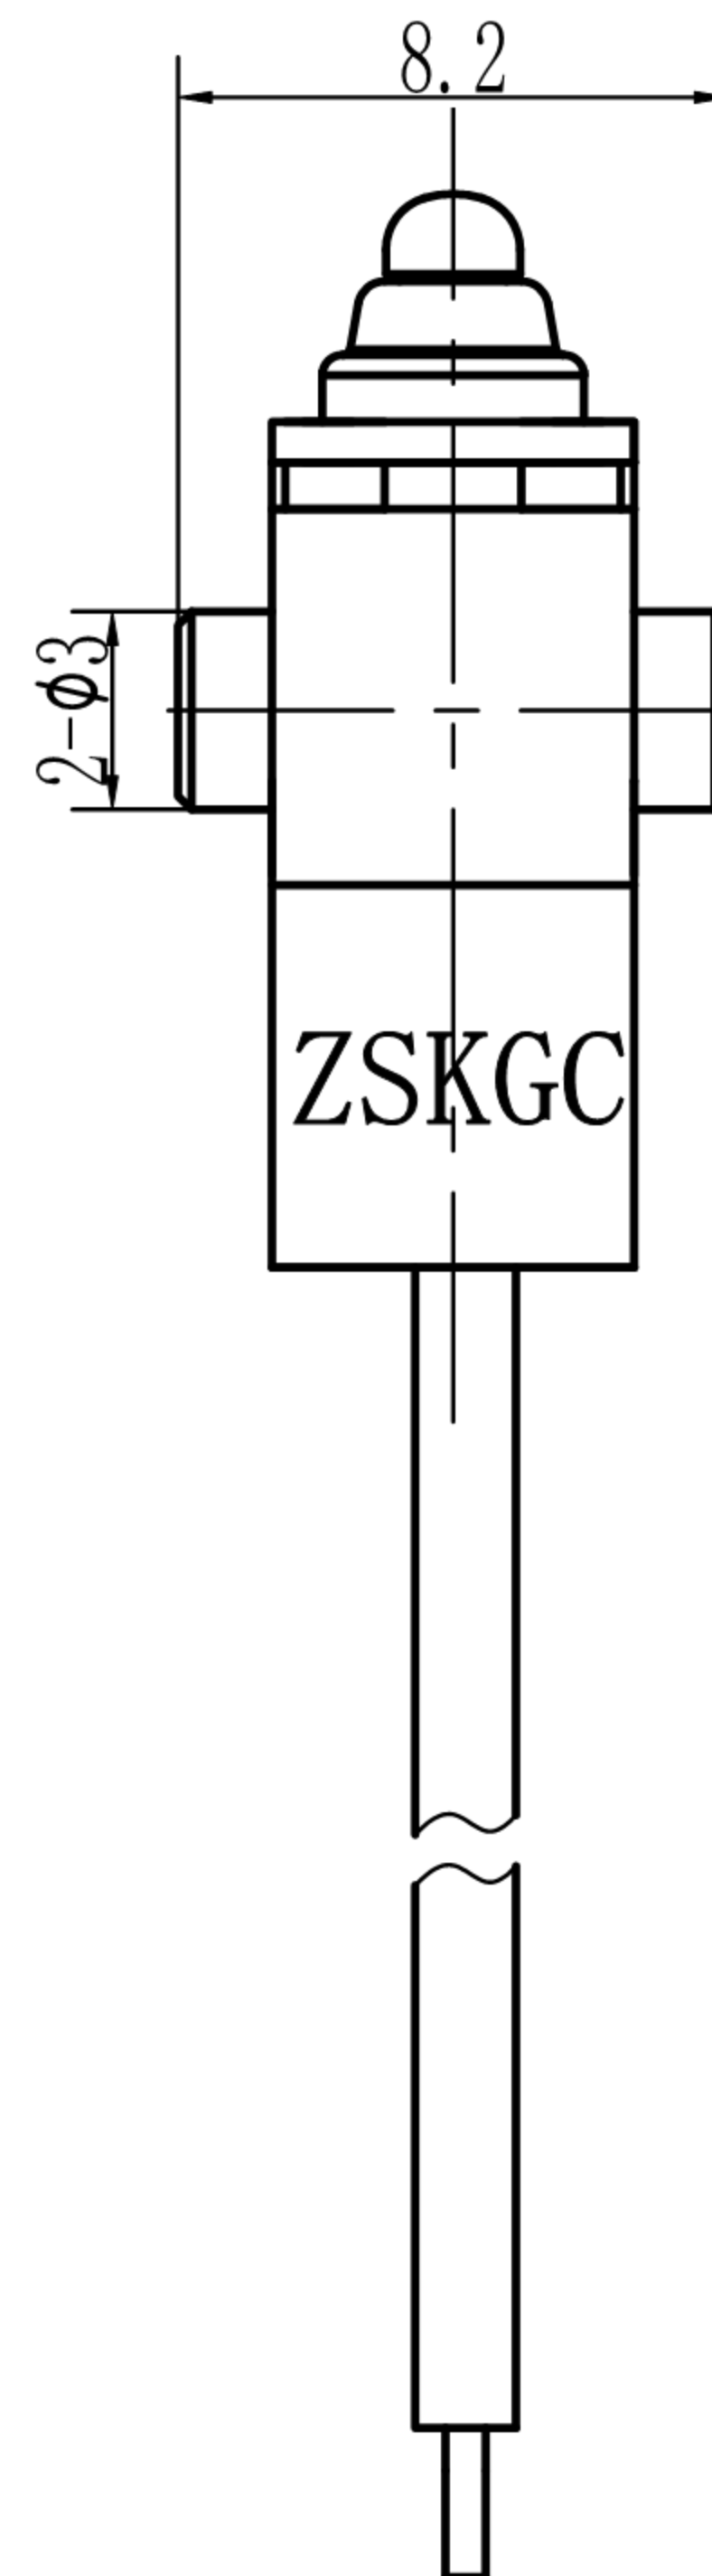

CAUS

CQC CE A

序号	主要技术参数(Main Technical Parameters)	4
1	电气额定值(Electrical Rating): 0.1A 125/250VAC;3A/12VDC	
2	环境温度(Ambient temperature): 40T130	
3	电气寿命(Electrical lifetime): 5E4 cycles	
4	操作力(Operating force): 3.0N MAX	5
5	自由位置(FP): $7.7 \pm 0.3\text{mm}$	
6	动作位置(OP): $7.2 \pm 0.5\text{mm}$	
7	全行程位置 (TTP) : 6.5mm Max	
8	接触电阻(Contact Resistance): $\leq 100\text{m}\Omega$ (不含电线)	6
9	耐压(Withstand Voltage): 脚与脚500/60S/5mA, 脚与壳1500/60S/5mA	
10	绝缘电阻(Insulation Resistance): $\geq 100\text{M}\Omega$ (Test Voltage 500VDC)	
11	防护等级: IP67	

				東莞市高迪電子有限公司 DONG GUAN GAO DI ELECTRONICS CO. , LTD						DRAWN BY: DATE		MAT'L		TITLE		Waterproof micro movement							
										Ming Ming Zou 07/23/13				MODLE		Waterproof micro movement							
										CHECKED BY: DATE		FINISH		SCALE		1 : 1		DWG NO.		GD-FSK-20-D222		SIZE	
2	公差及料號更新	Jack	072313	TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Angle ± 0.3°		3RD. ANGEL'S				UNITS		MM		APPROVED BY: DATE		SHEET NO.		1 of 1		PART NO.		VER	
1	圖面更新	Frank Wu	021012											Jia Xiang 07/23/13									
ITEM NO.	DESCRIPTION	DRAWN	DATE																				