

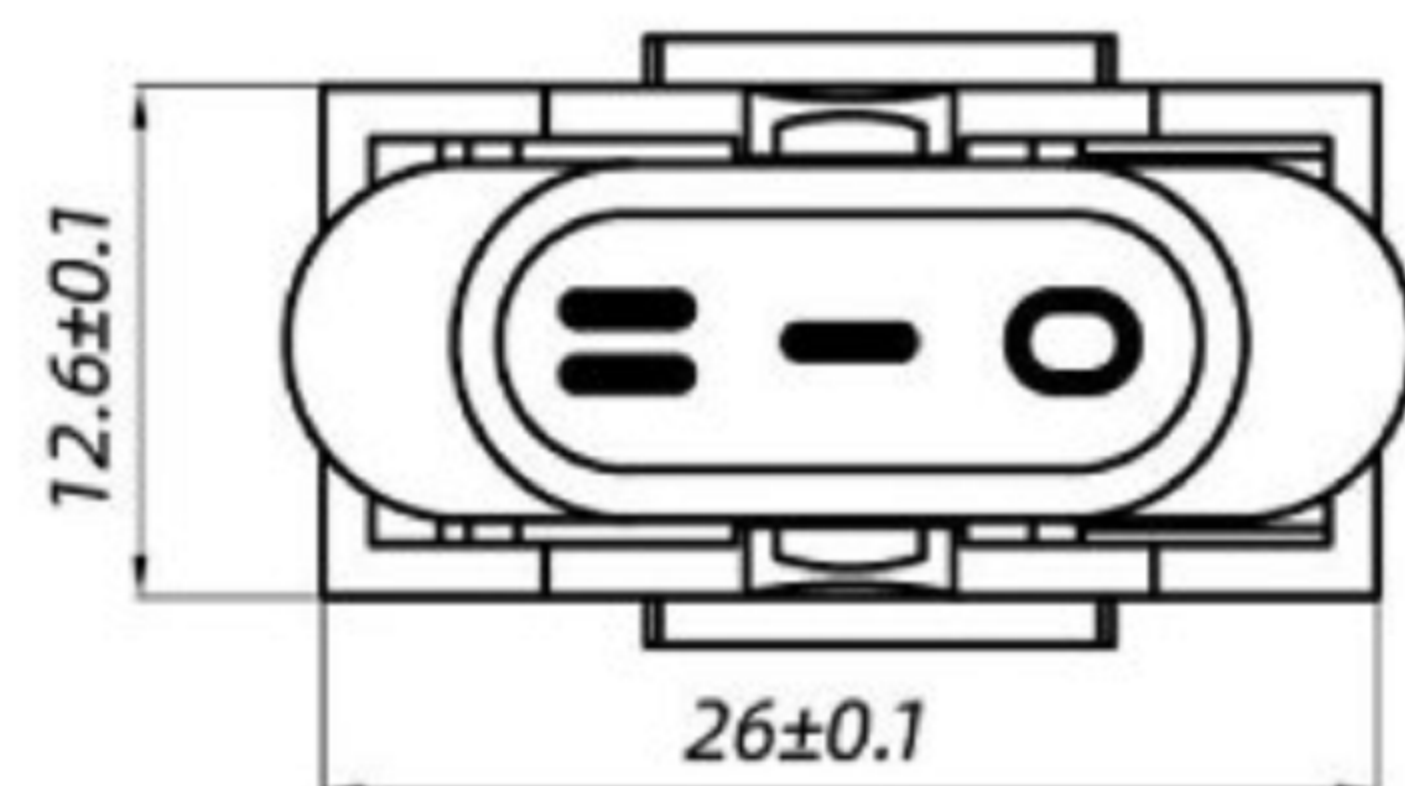


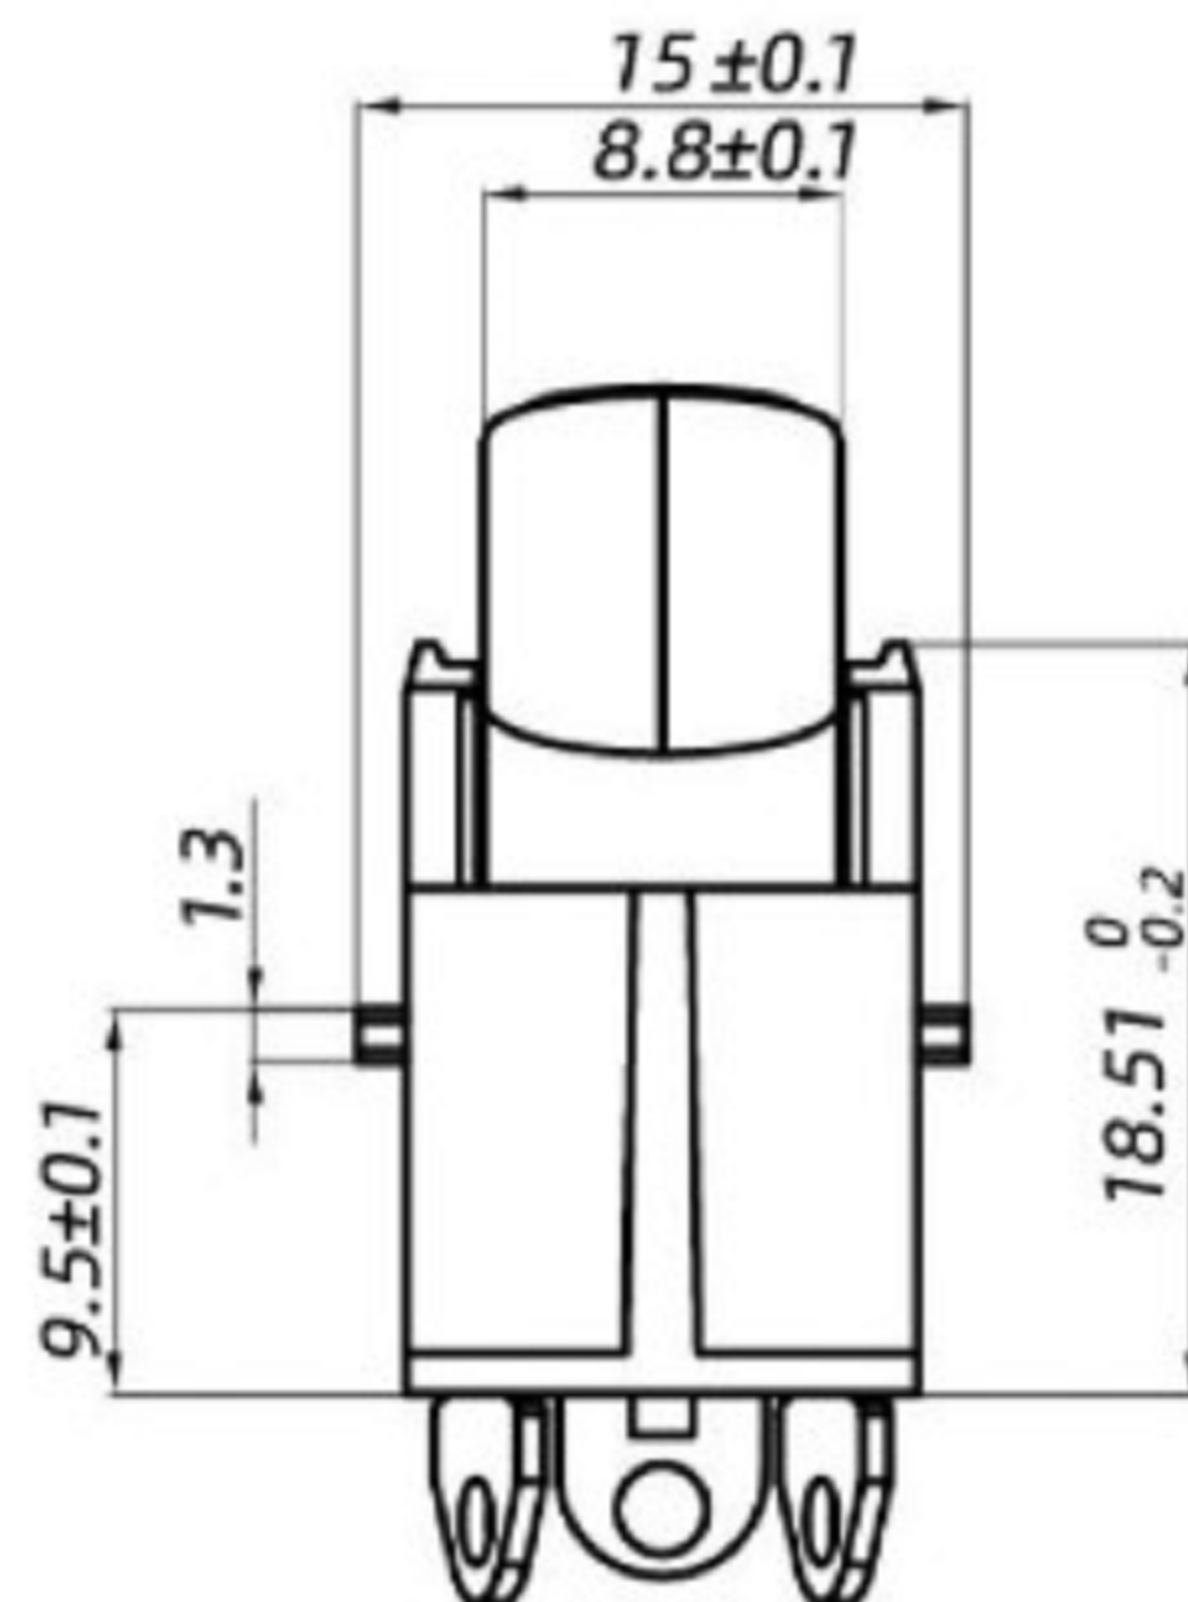

线路/ Circuit

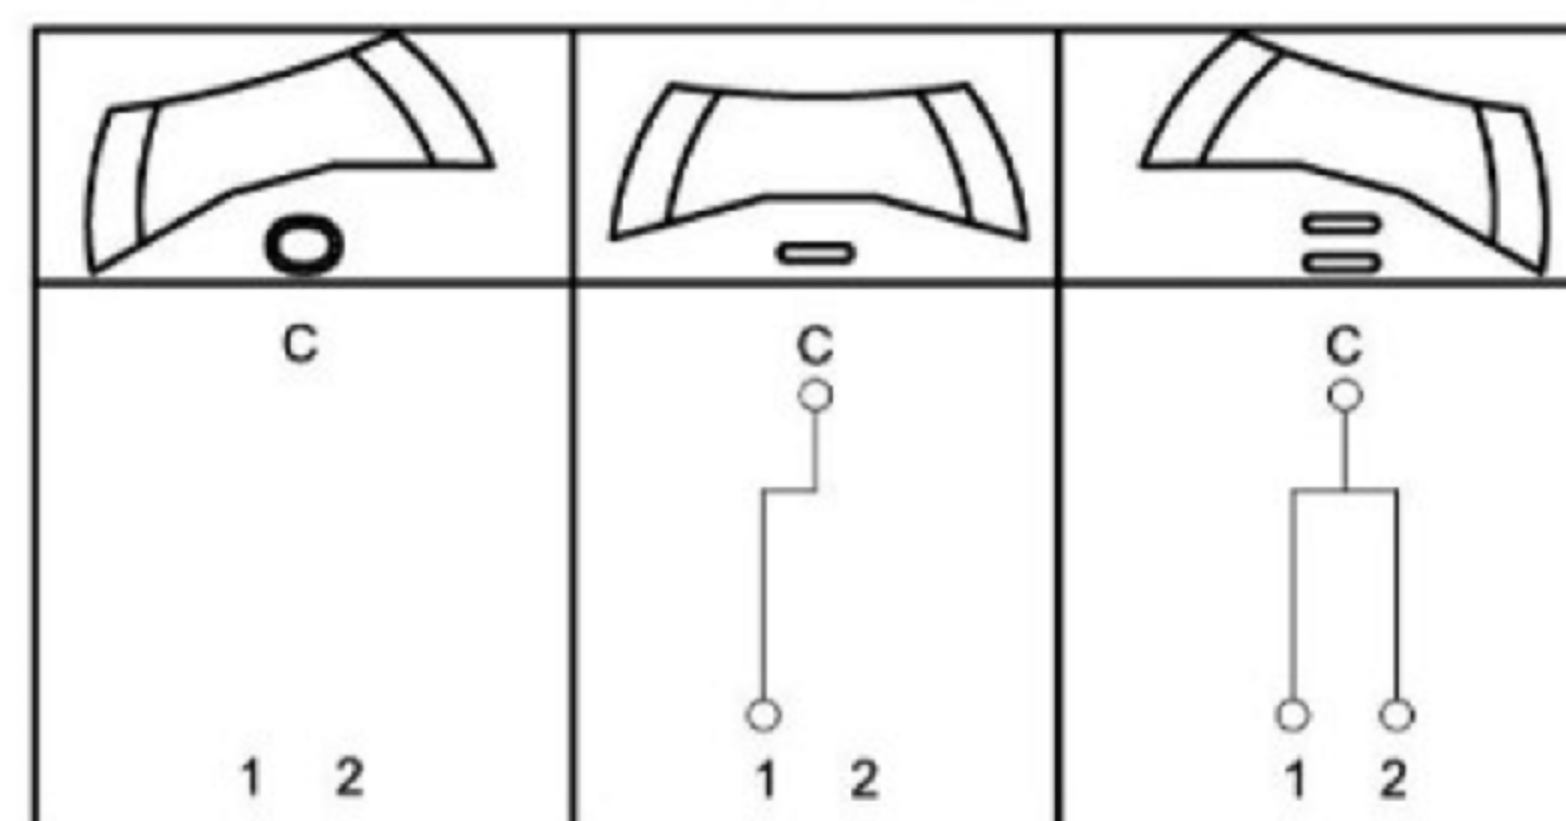

跷板开关

1. 跳板开关型号 ROCKER SWITCH MODEL:KND-2-A2R
2. PCB端子 PCB MOUNT TERMINAL;
单刀三掷 SINGLE POLE THREE THROW
3. 额定值 RATING: 16(4)A 125/250VAC μ T85/55
10(2)A 125/250VAC μ T85/55
7(2)A 125/250VAC μ T85/55    
4. 接触电阻 CONTACT RESISTANCE: <50m Ω (INITIAL)
5. 绝缘电阻 INSULATION RESISTANCE: $\geq 100\text{M}\Omega$ (DC500V/1MIN)
6. 介电强度 DIELECTRIC STRENGTH: 1500V /5mA /1MIN
7. 机械寿命 MECHANICAL LIFE: >50000 CYCLES
8. 电气寿命 ELECTRICAL LIFE: >10000 CYCLES
9. 端子手工焊接条件 SOLDER ABILITY OF TERMINAL: MAX260°C, 3S
10. 操作力 OPERATION FORCE:850 $\pm$ 200gf
11. 所有部件均使用环保材料 ALL MATERIALS ARE RoHS COMPLIANT

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	± 0.3				
	Above 15 ~ 30	± 0.4				
	Above 30 ~ 50	± 0.5				
	Angle	$\pm 0.3^\circ$				

DRAWN BY:	DATE	MAT'L		TITLE	SWITCH	
Ming Ming Zou	07/10/13					
CHECKED BY:	DATE	FINISH		MODLE	ROCKER SWITCH	
Ning Ning Su	07/10/13					
APPROVED BY:	DATE	SCALE	2 : 1	DWG NO.	GD-KND-2A2R	SIZE
						A4
	Jia Xiang	07/10/13	SHEET NO.	1 of 1	PART NO.	VER
						R1