
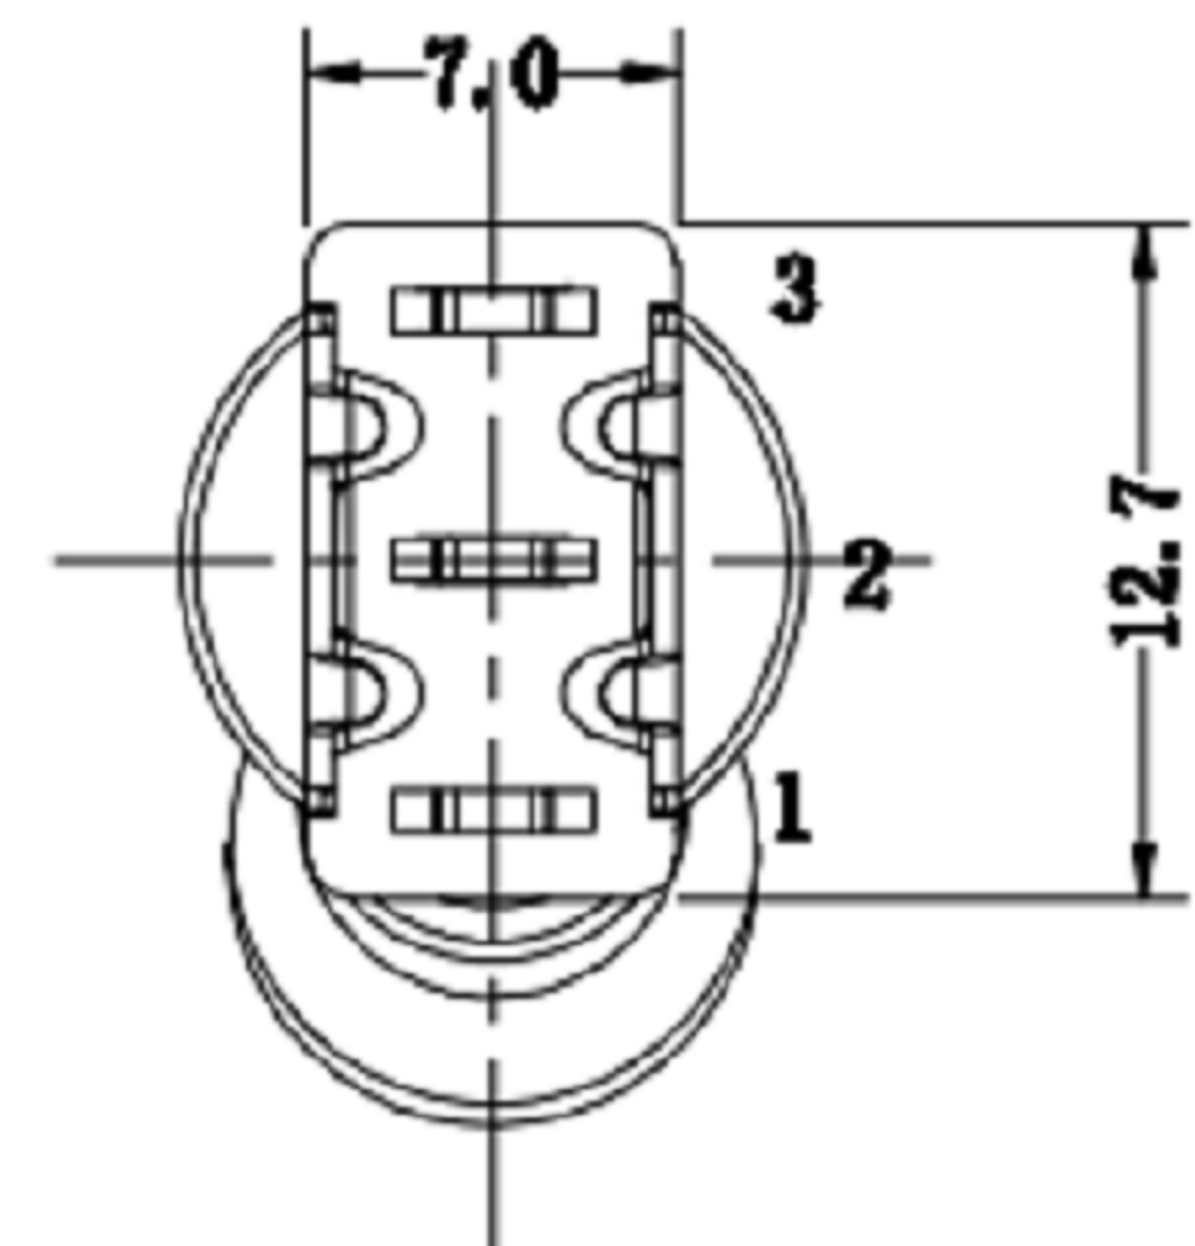
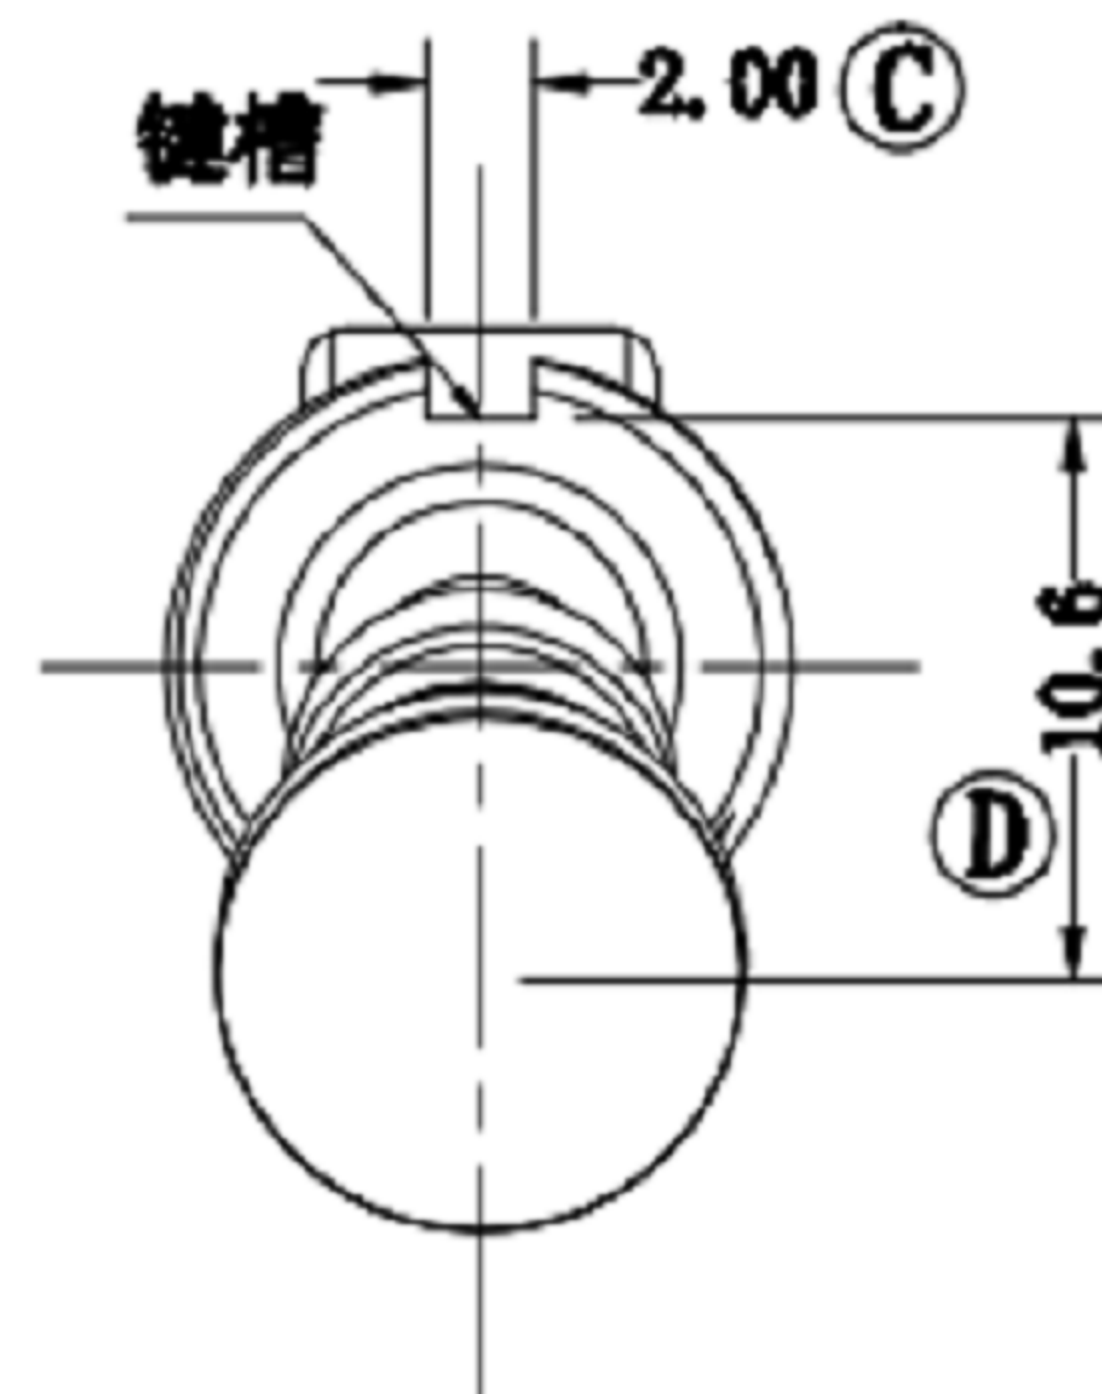


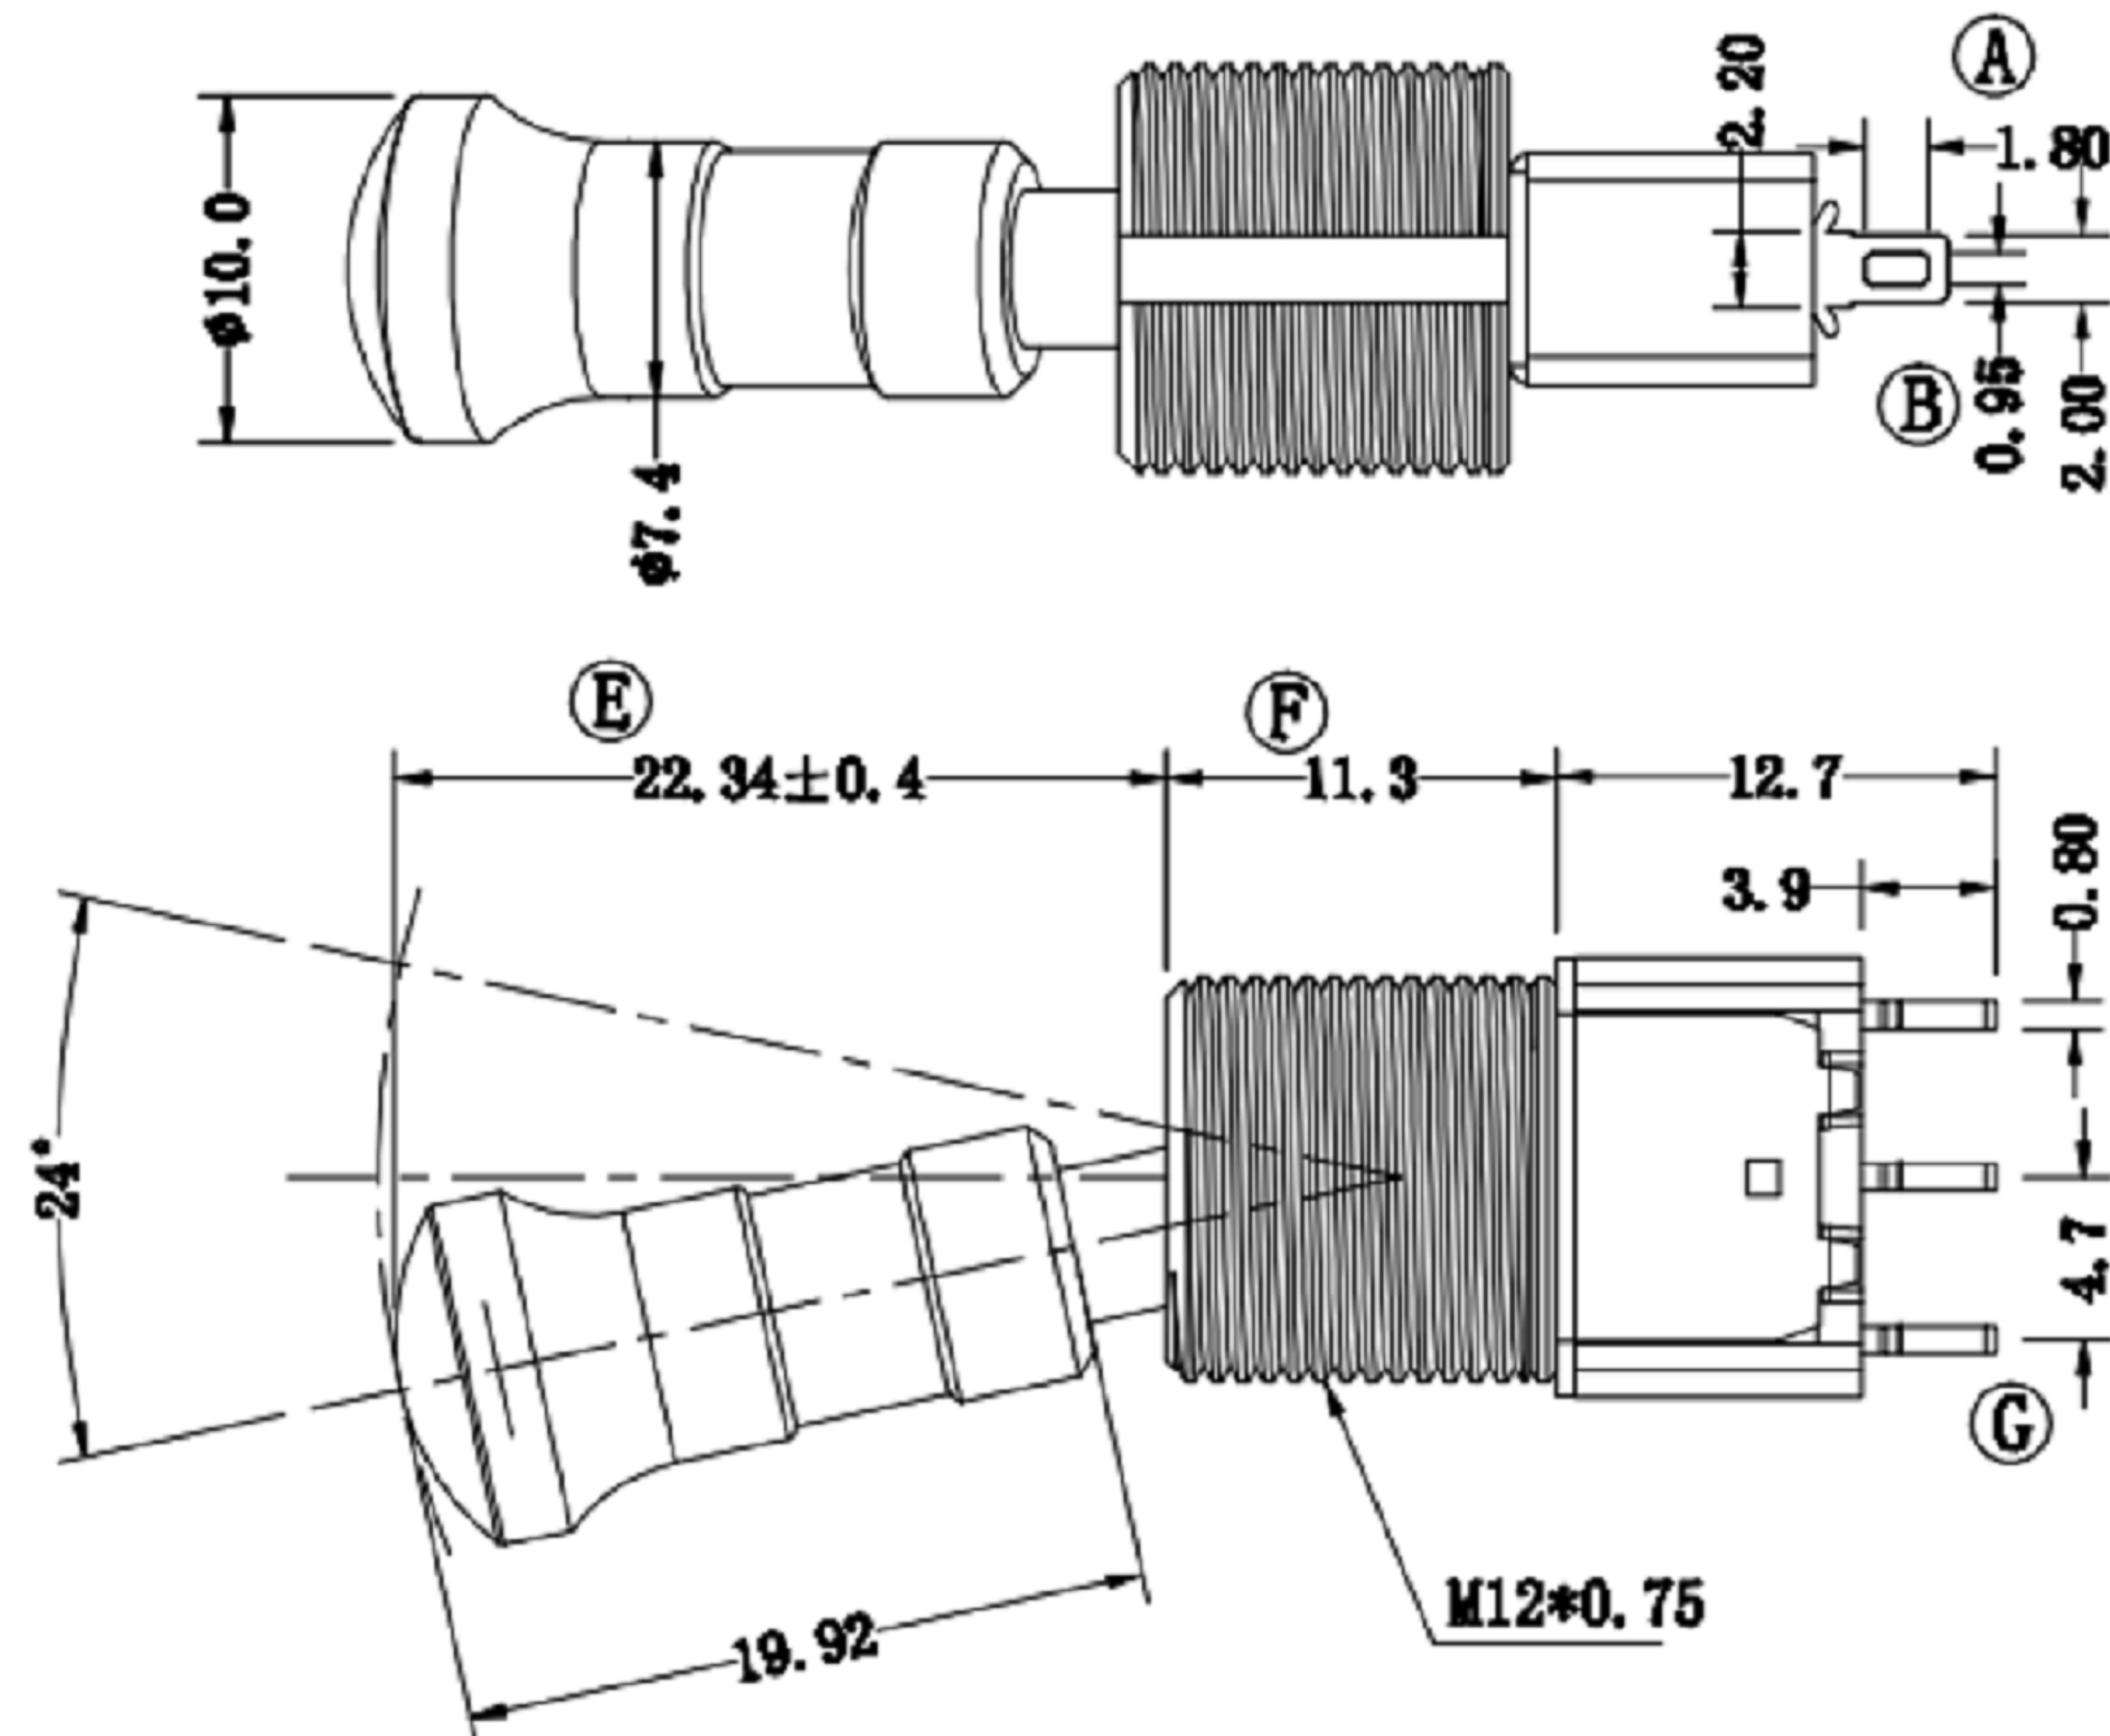

Technical characteristics

SPECIFICATION: 5 A max. @ 125 VAC.

2 A max. @ 250 VAC.

MECHANICAL LIFE: 40,000 make-and-break cycles.

CONTACT RESISTANCE: 20mΩ max. initial @ 2-4VDC
100mA for both silver.

INSULATION RESISTANCE: 1000 MΩ min.

DIELECTRIC STRENGTH: 1500 VAC min.

OPERATING TEMPERATURE: -30°C to +85°C.

Materials

CASE: PPA (UL 94V-0)

HOUSING: Stainless Steel.




ACTUATOR: Alloy, chrome plated.

BUSHING: Alloy, nickel plated.

CONTACT/TERMINALS: Copper alloy silver plated.

RoHS

手柄位置及导通端子示意图

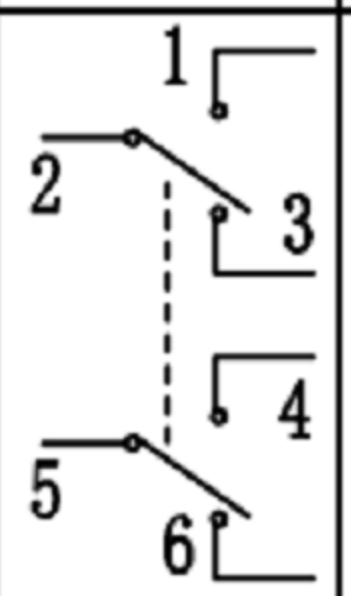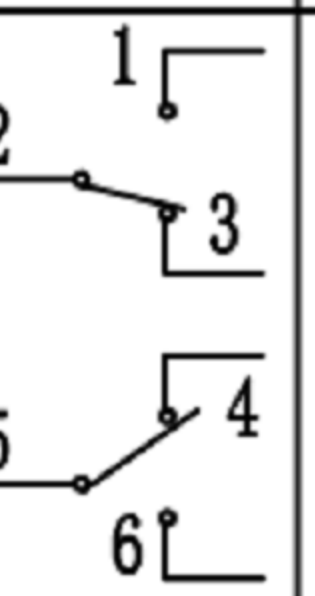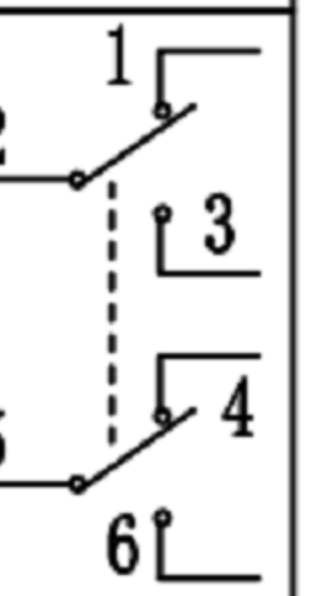Model NO.	POS. 1	POS. 2	POS. 3
			
234	ON	ON	ON
SCHEMATIC			




东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE
Ming Ming Zou 07/23/13

CHECKED BY: DATE
Ning Ning Su 07/23/13

APPROVED BY: DATE
Jia Xiang 07/23/13

MAT'L

FINISH

SCALE

SHEET NO.

TITLE Medium sized switch

MODLE Medium sized switch

DWG NO. GD-MT-0-102-D301RS

PART NO.

SIZE

A4

VER

R2

2	公差及料號更新	Jack	072313
1	圖面更新	Frank Wu	021012
ITEM NO.	DESCRIPTION	DRAWN	DATE