


1. Rating : DC 30V, 0.5A ;
2. Contact resistance : $\leq 30\text{m}\Omega$;
3. Insulation resistance : $\geq 100\text{M}\Omega$;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N;
6. life test : 5,000 cycles °

Technology Request:

- 1.Outlook:
No burr, no hurt.
- 2.Electronic performance:
 - a:Insulation resistance:
Above DC500V/100MΩ;
 - b:Endure voltage:
AC500V at 1 minute;
 - c:Contact resistance:
Under 30mΩ;
- 3.Insertion force & withdrawal force:
0.3—3kgf.
- 4.Salt spray test:24H.
- 5.Meet RoHS.
- 6.Remark * is important specification.

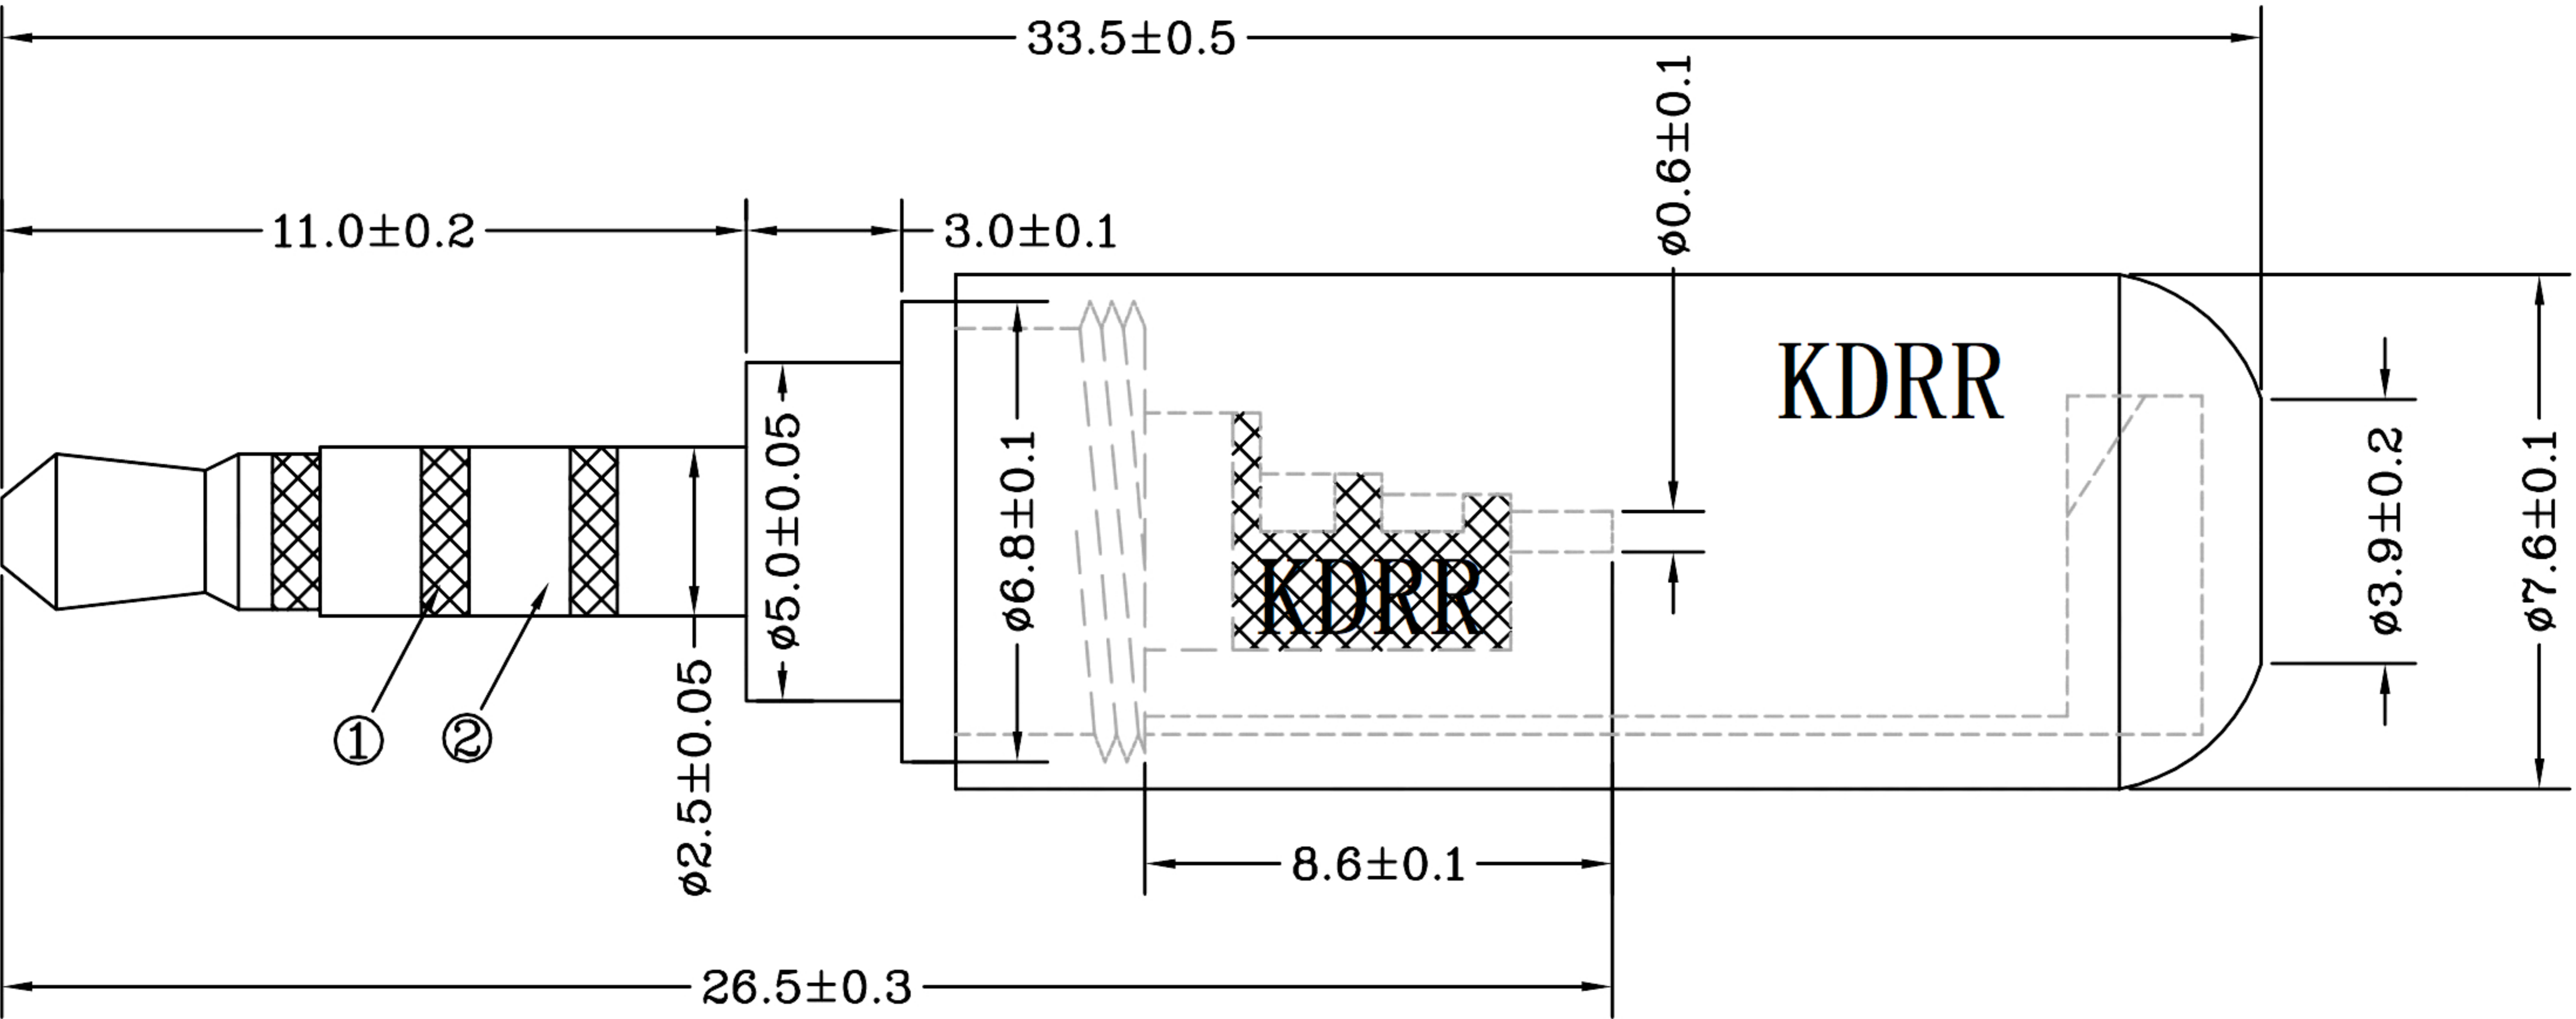

				 东莞市高迪电子有限公司 Dong Guan KDRR Electronic Switch Jack Co., Ltd.					DRAWN BY: DATE		MAT'L		TITLE	Plug			
									Jack Lu	06/19/17		FINISH		MODLE	Audio Plug		
									CHECKED BY: DATE		Jacky Chen		06/19/17	SCALE	1 : 1	DWG NO.	GD-PJT-25004M-S
									APPROVED BY: DATE			Tony Kao					
ITEM NO.	DESCRIPTION	DRAWN	DATE	TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S		UNITS	MM					VER				
													R				