
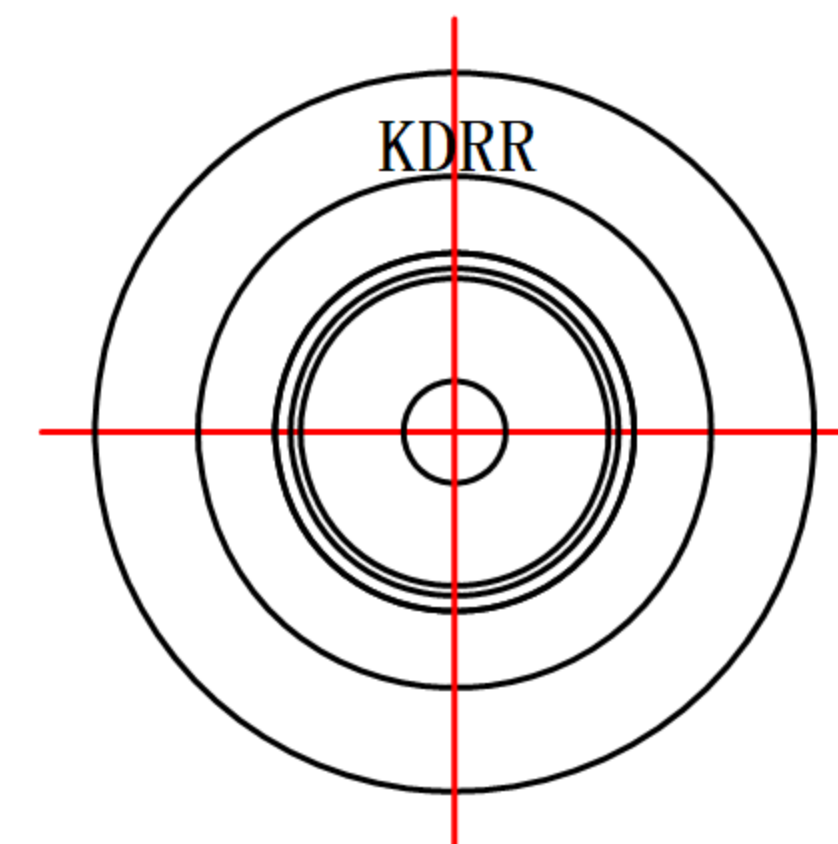
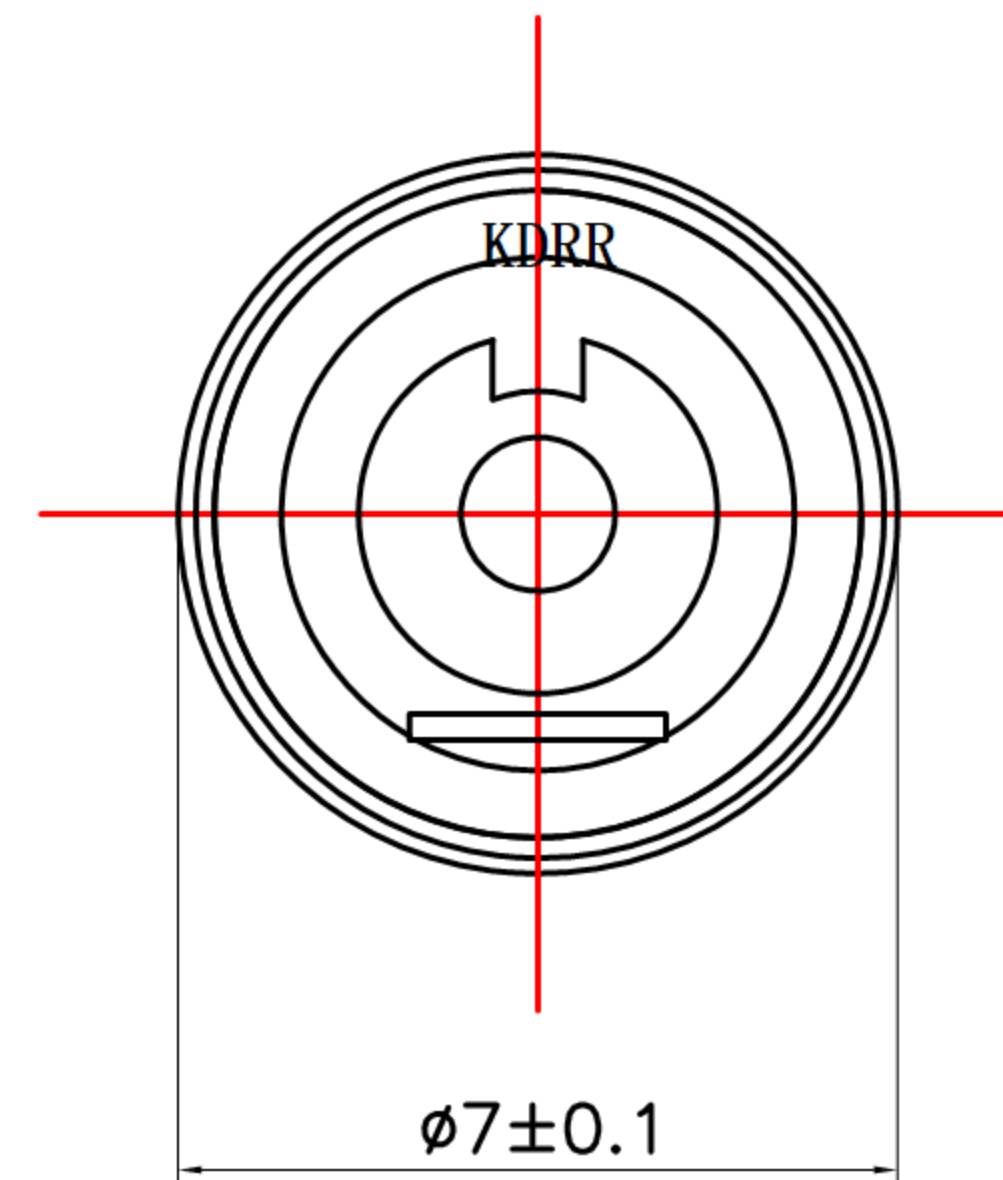
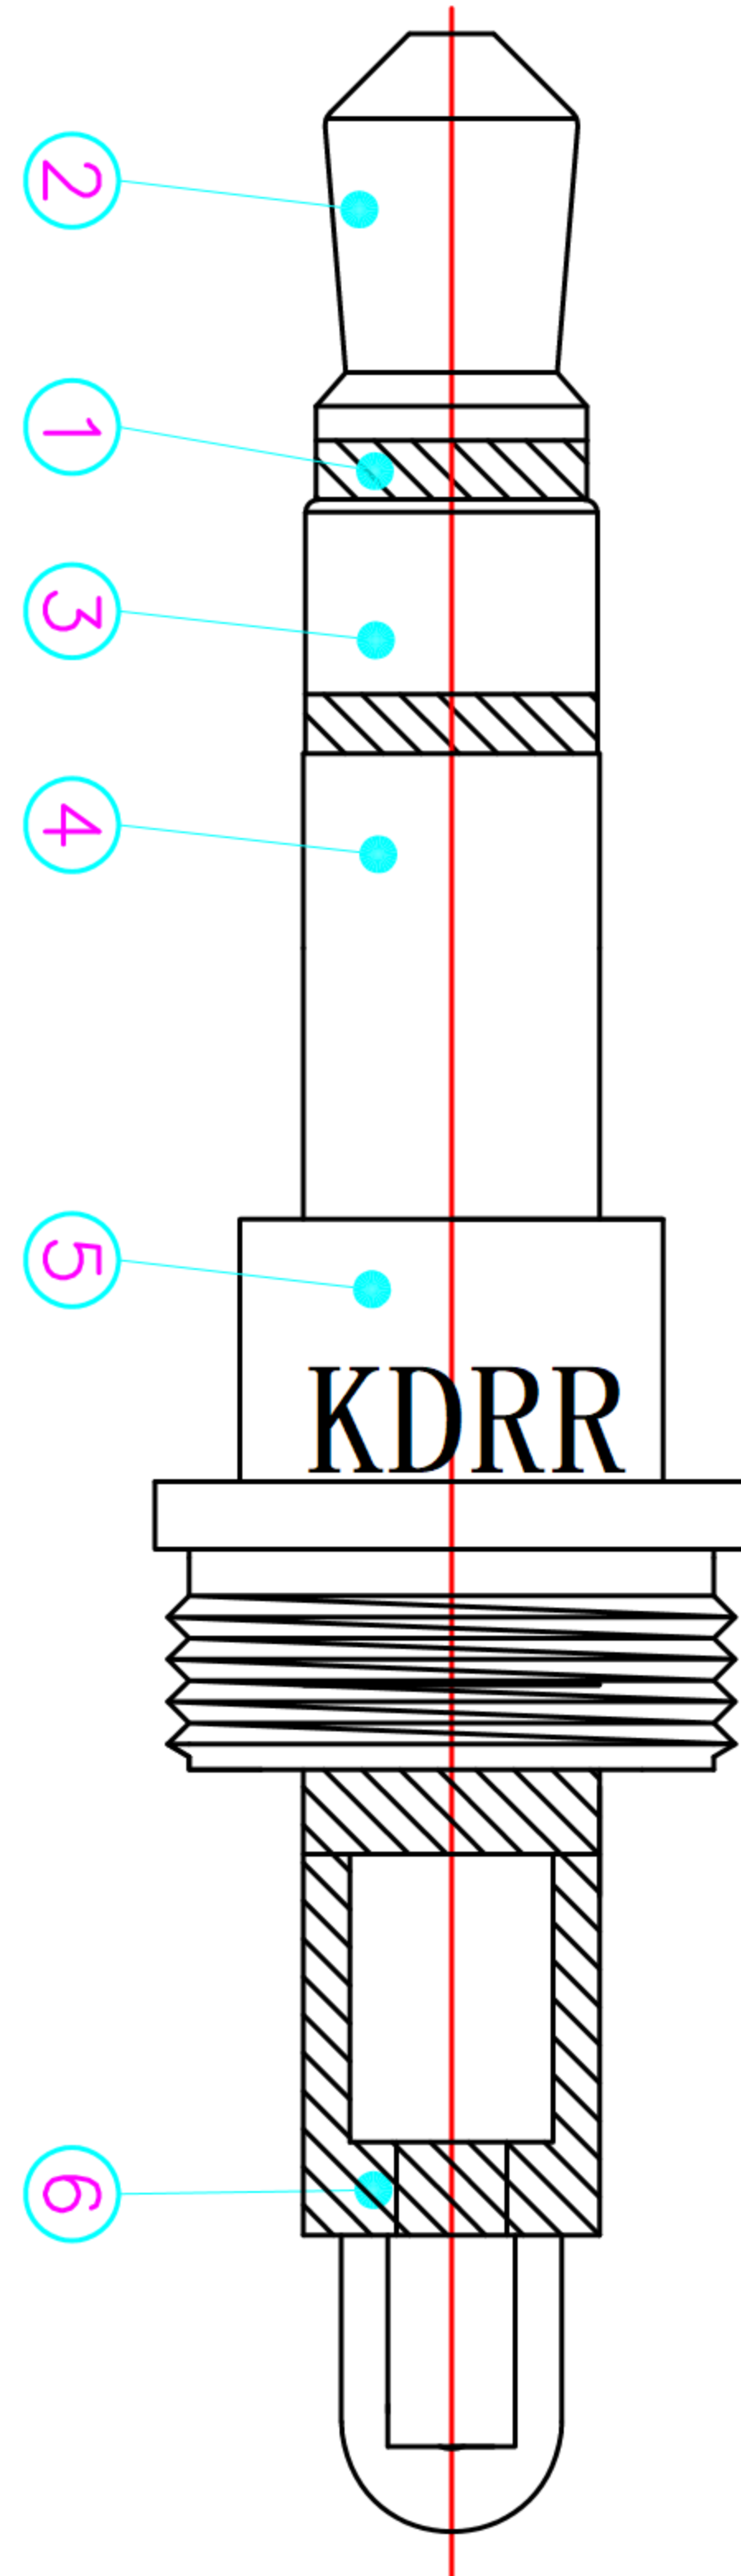


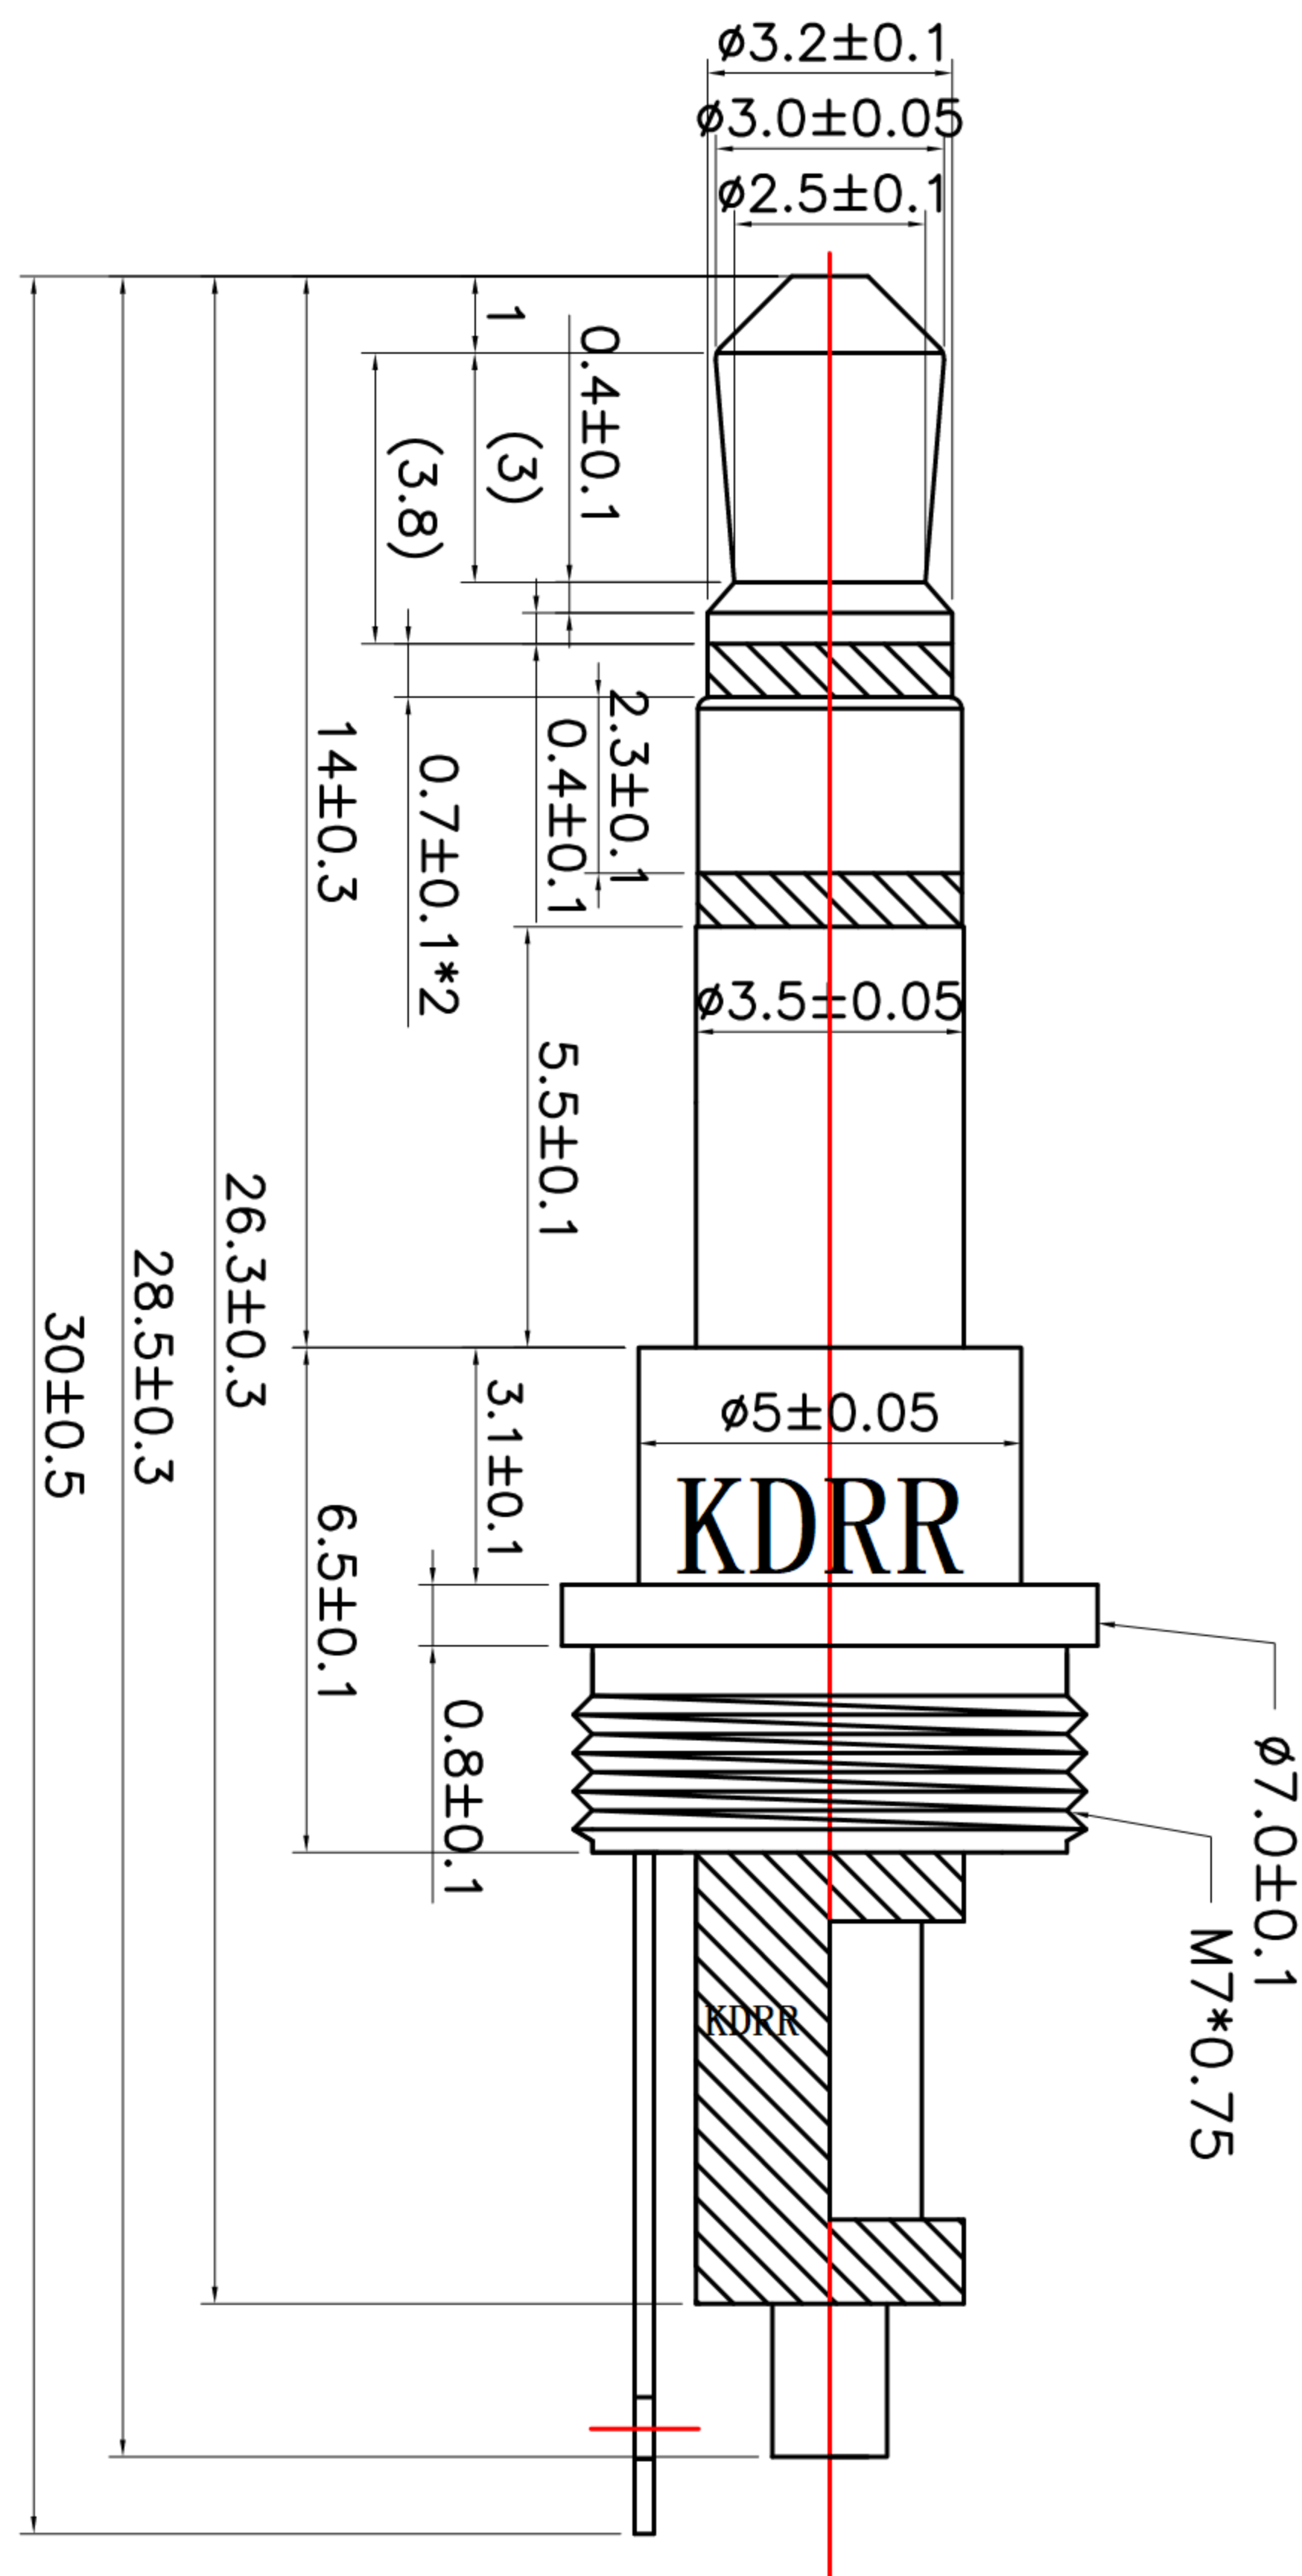

SPECIFICATION

- 1.Rating : DC 30V, 0.5A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

Technology Request:

- 1.Outlook:
No burr, no hurt.
- 2.Electronic performance:
 - a:Insulation resistance:
Above DC500V/100M Ω ;
 - b:Endure voltage:
AC500V at 1 minute;
 - c:Contact resistance:
Under 30m Ω ;
- 3.Insertion force & withdrawal force:
0.3-3kgf.
- 4.Salt spray test:24H.
- 5.Meet RoHS.
- 6.Remark * is important specification.




东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Jack Lu 06/19/17

CHECKED BY: DATE

Jacky Chen 06/19/17

APPROVED BY: DATE

Tony Kao 06/19/17

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

Plug

Audio Plug

GD-PJT-3535070

SIZE

A4

VER

R