

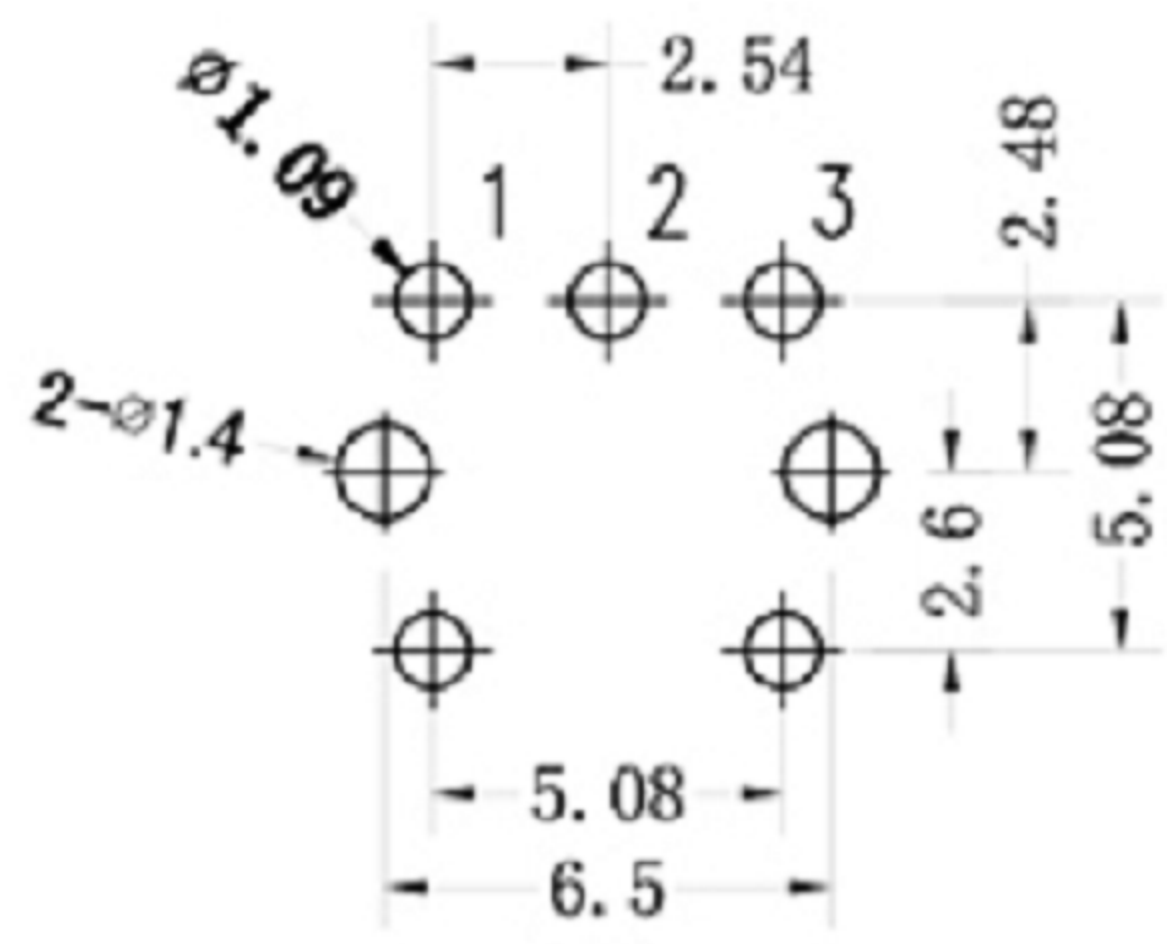
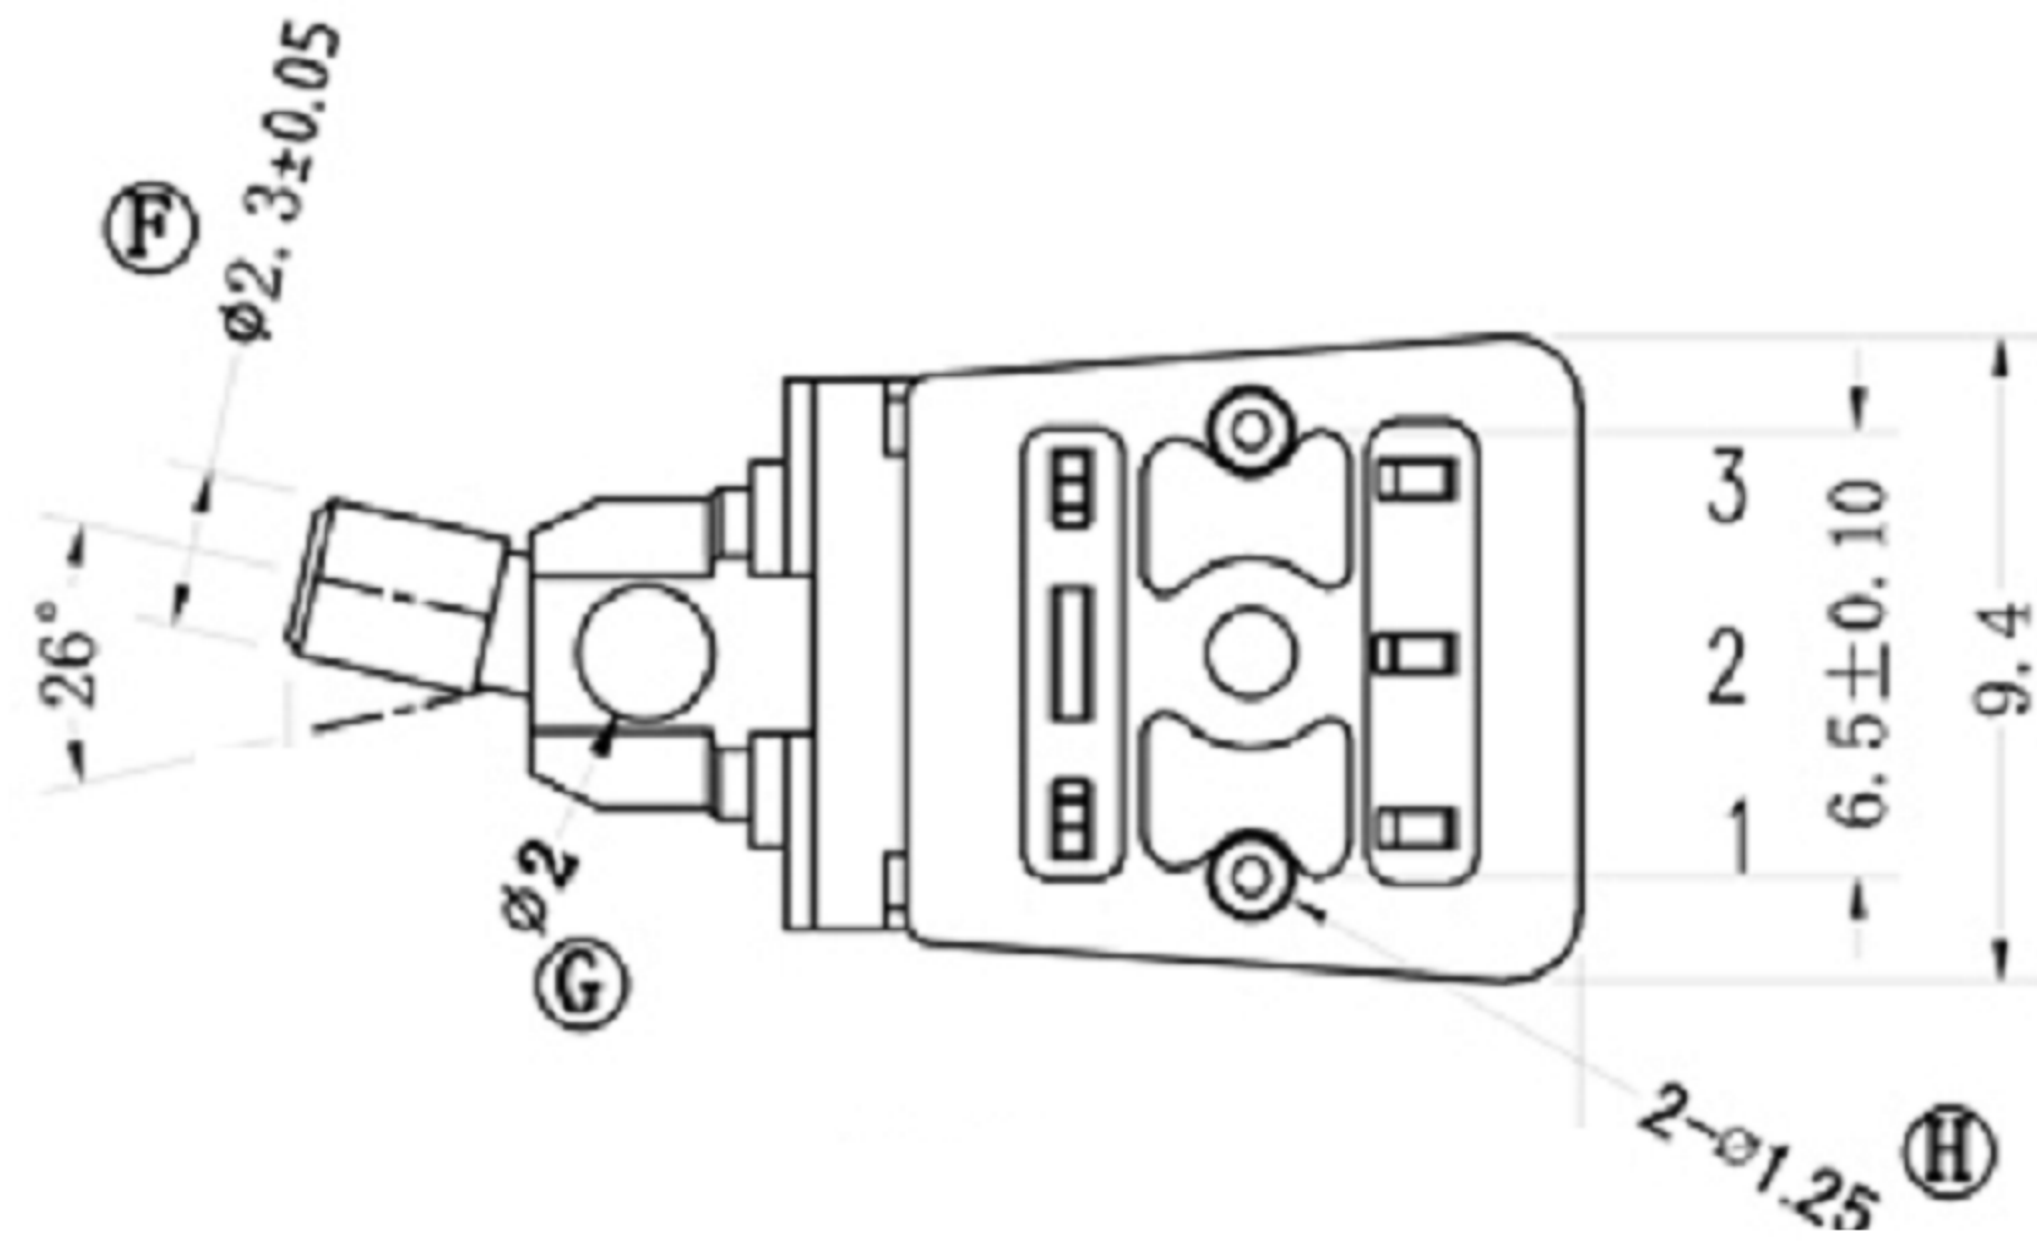


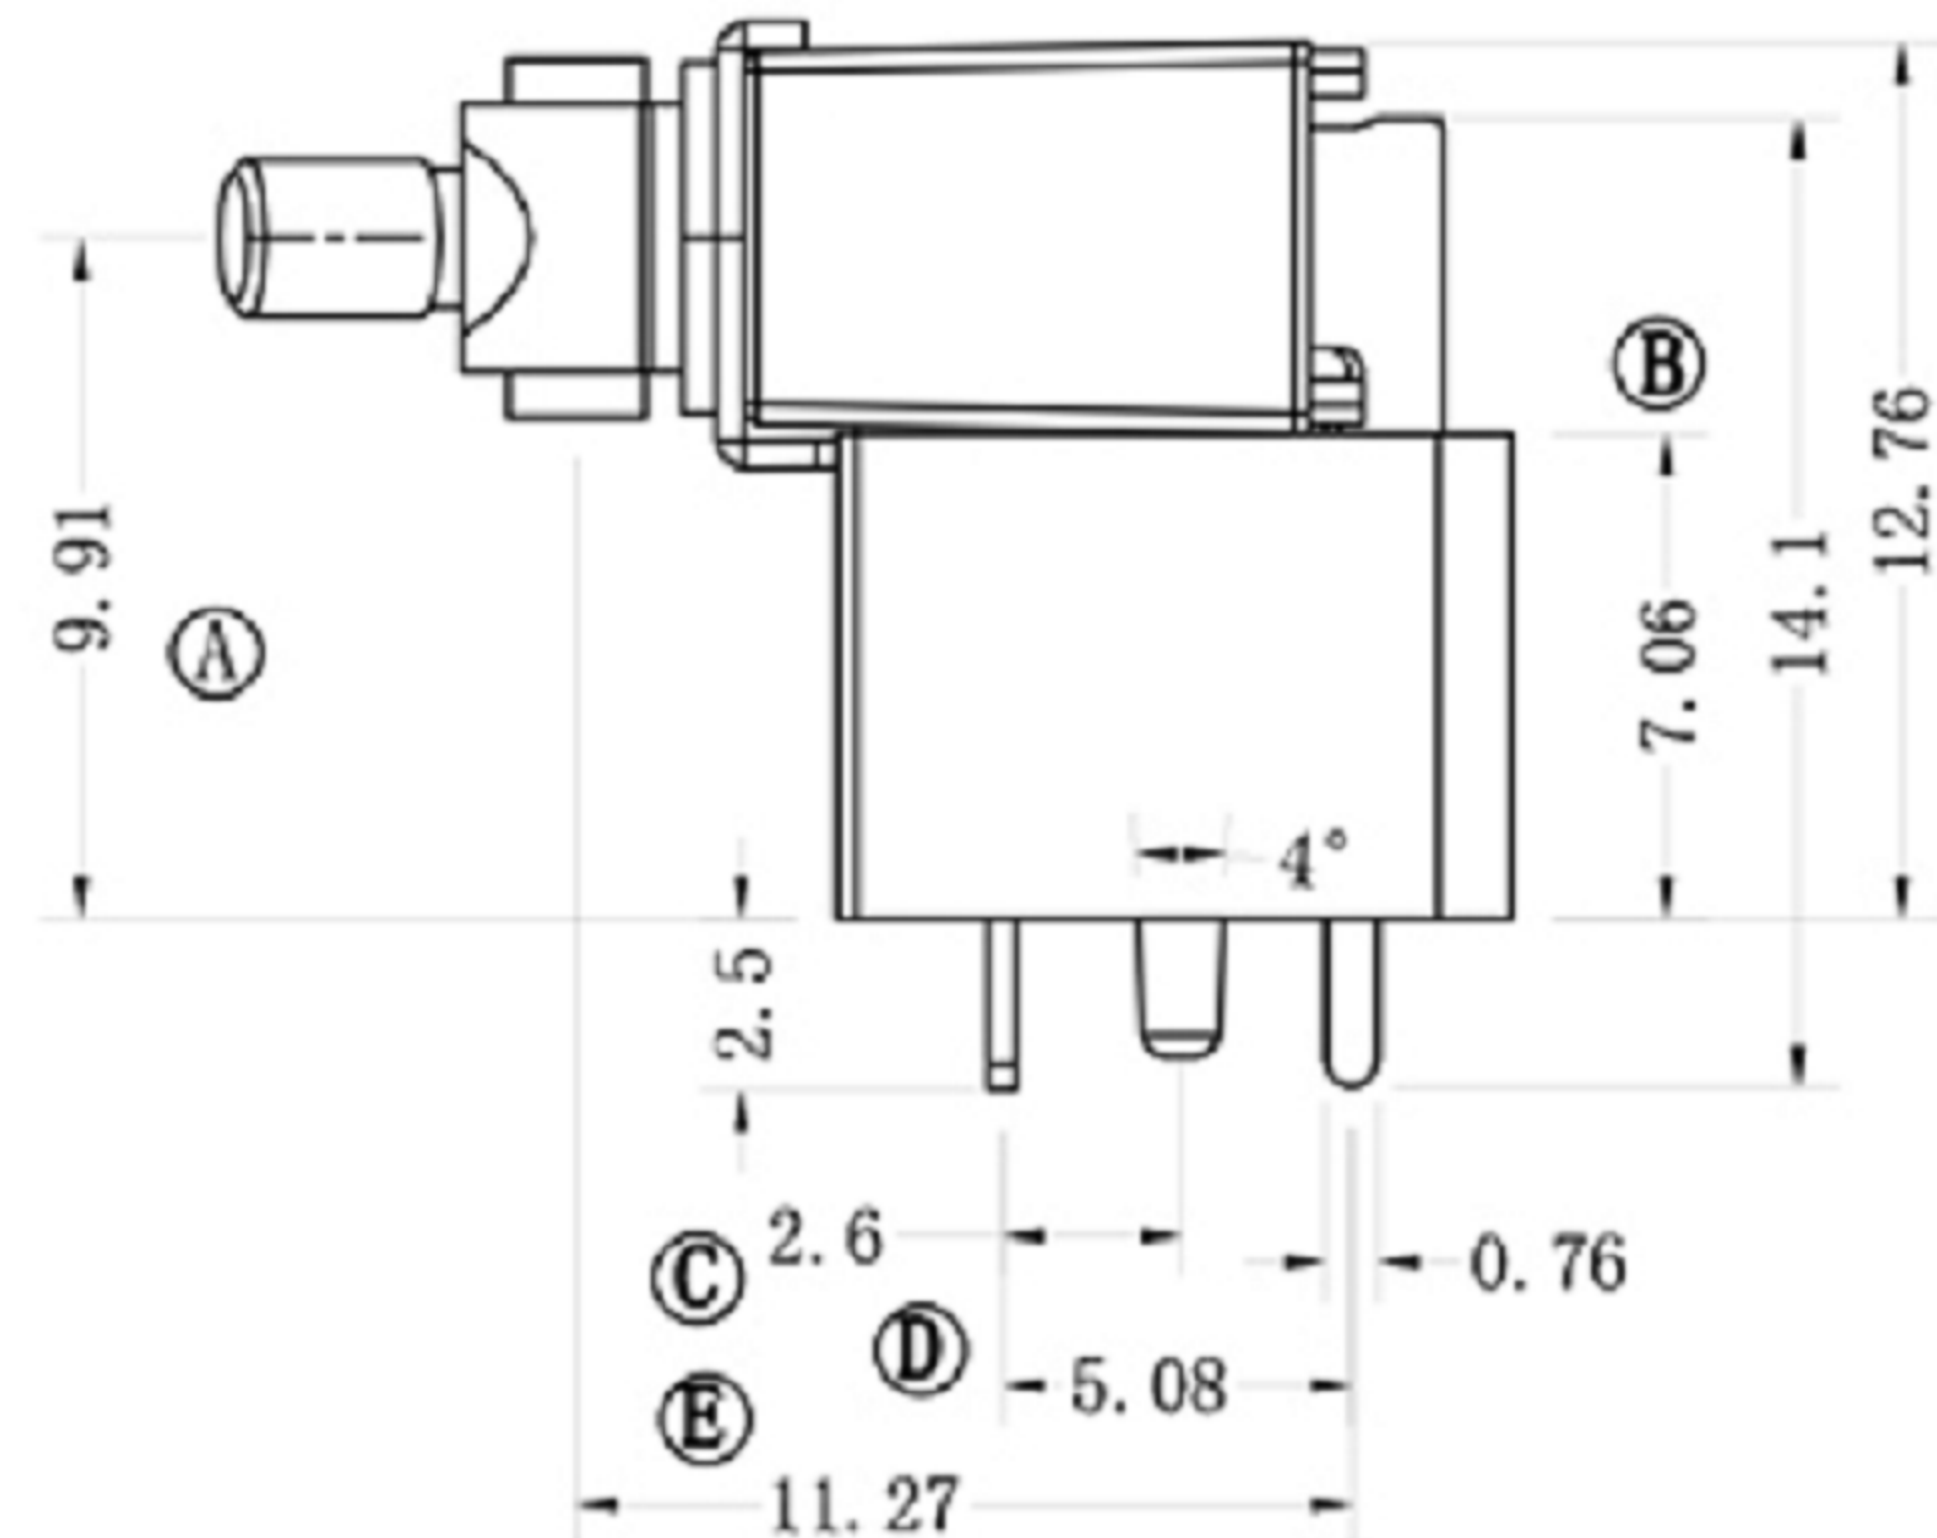

RECOMMENDED PCB LAYOUT

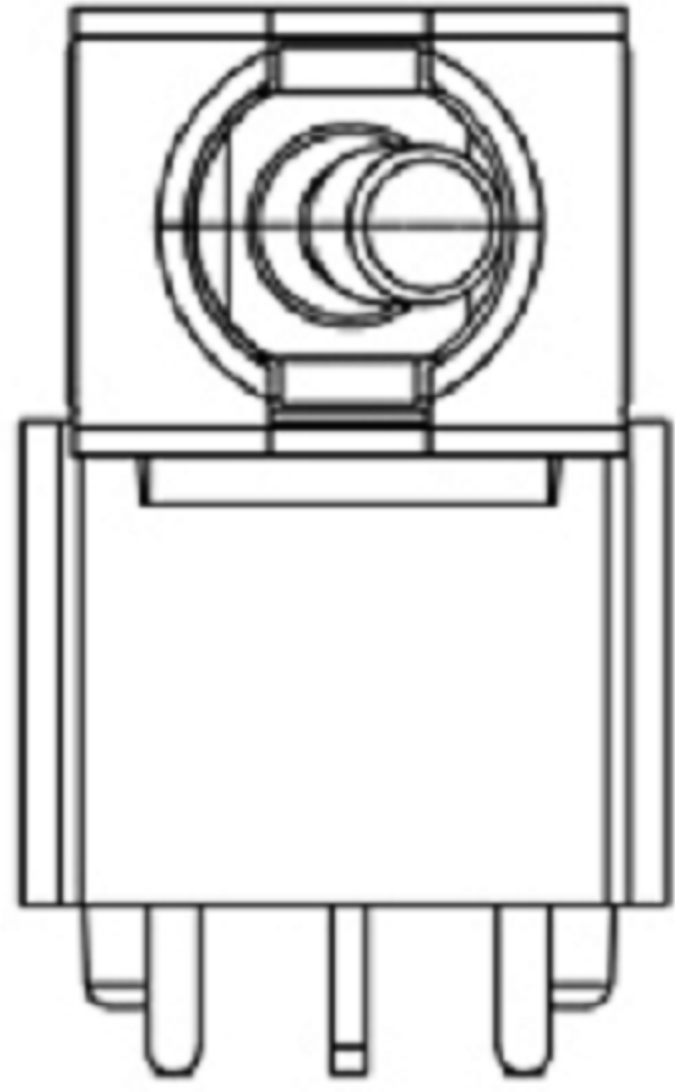


标注: ①-⑦尺寸的重点检验尺寸

Technical characteristics

SPECIFICATION:3 A max. @ 125 VAC.
1.5 A max. @ 250 VAC.
MECHANICAL LIFE:40,000 make-and-break cycles.
CONTACT RESISTANCE:20mΩ max.initial @2-4VDC
100mA for both silver.
INSULATION RESISTANCE: 1000 MΩ min.
DIELECTRIC STRENGTH: 1000 VAC min.
OPERATING TEMPERATURE: -25°C to +85°C.


Materials

CASE: PPA (UL 94V-0)
CAP: PA66
HOUSING: Stainless Steel.
ACTUATOR: Alloy,nickel plated.
BUSHING: Alloy,nickel plated.
CONTACT/TERMINALS: Copper alloy silver plated.
RoHS

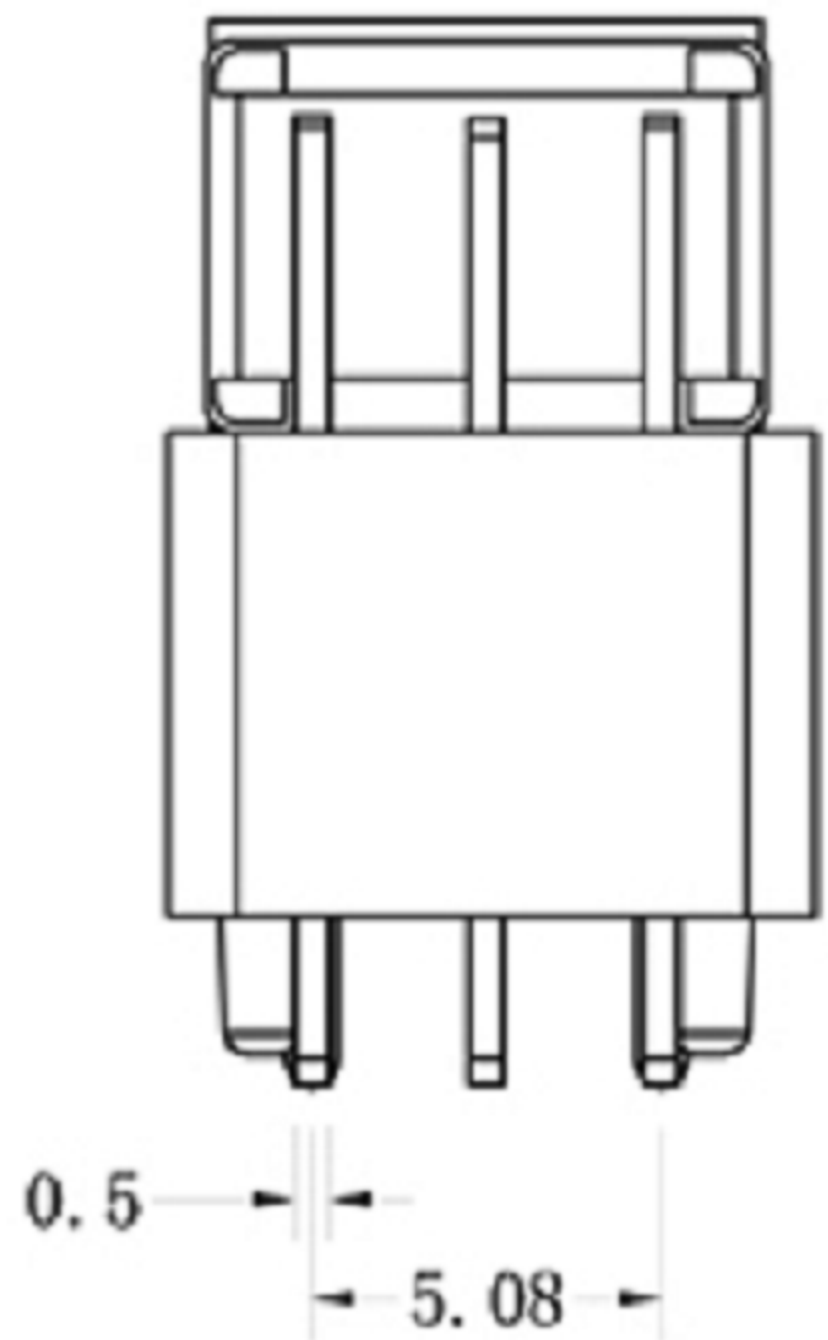



東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:		Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angle	±0.2 ±0.3 ±0.4 ±0.5 ±0.3°	3RD. ANGEL'S		UNITS	MM
------------------------------------	--	--	---------------------------------------	-----------------	---	-------	----

DRAWN BY:	DATE	MAT'L		TITLE	Medium sized switch	
Ming Ming Zou	07/23/13					
CHECKED BY:	DATE	FINISH		MODLE	Medium sized switch	
Ning Ning Su	07/23/13	SCALE	1 : 1	DWG NO.		
APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.		A4
Jia Xiang	07/23/13					VER
						R2