

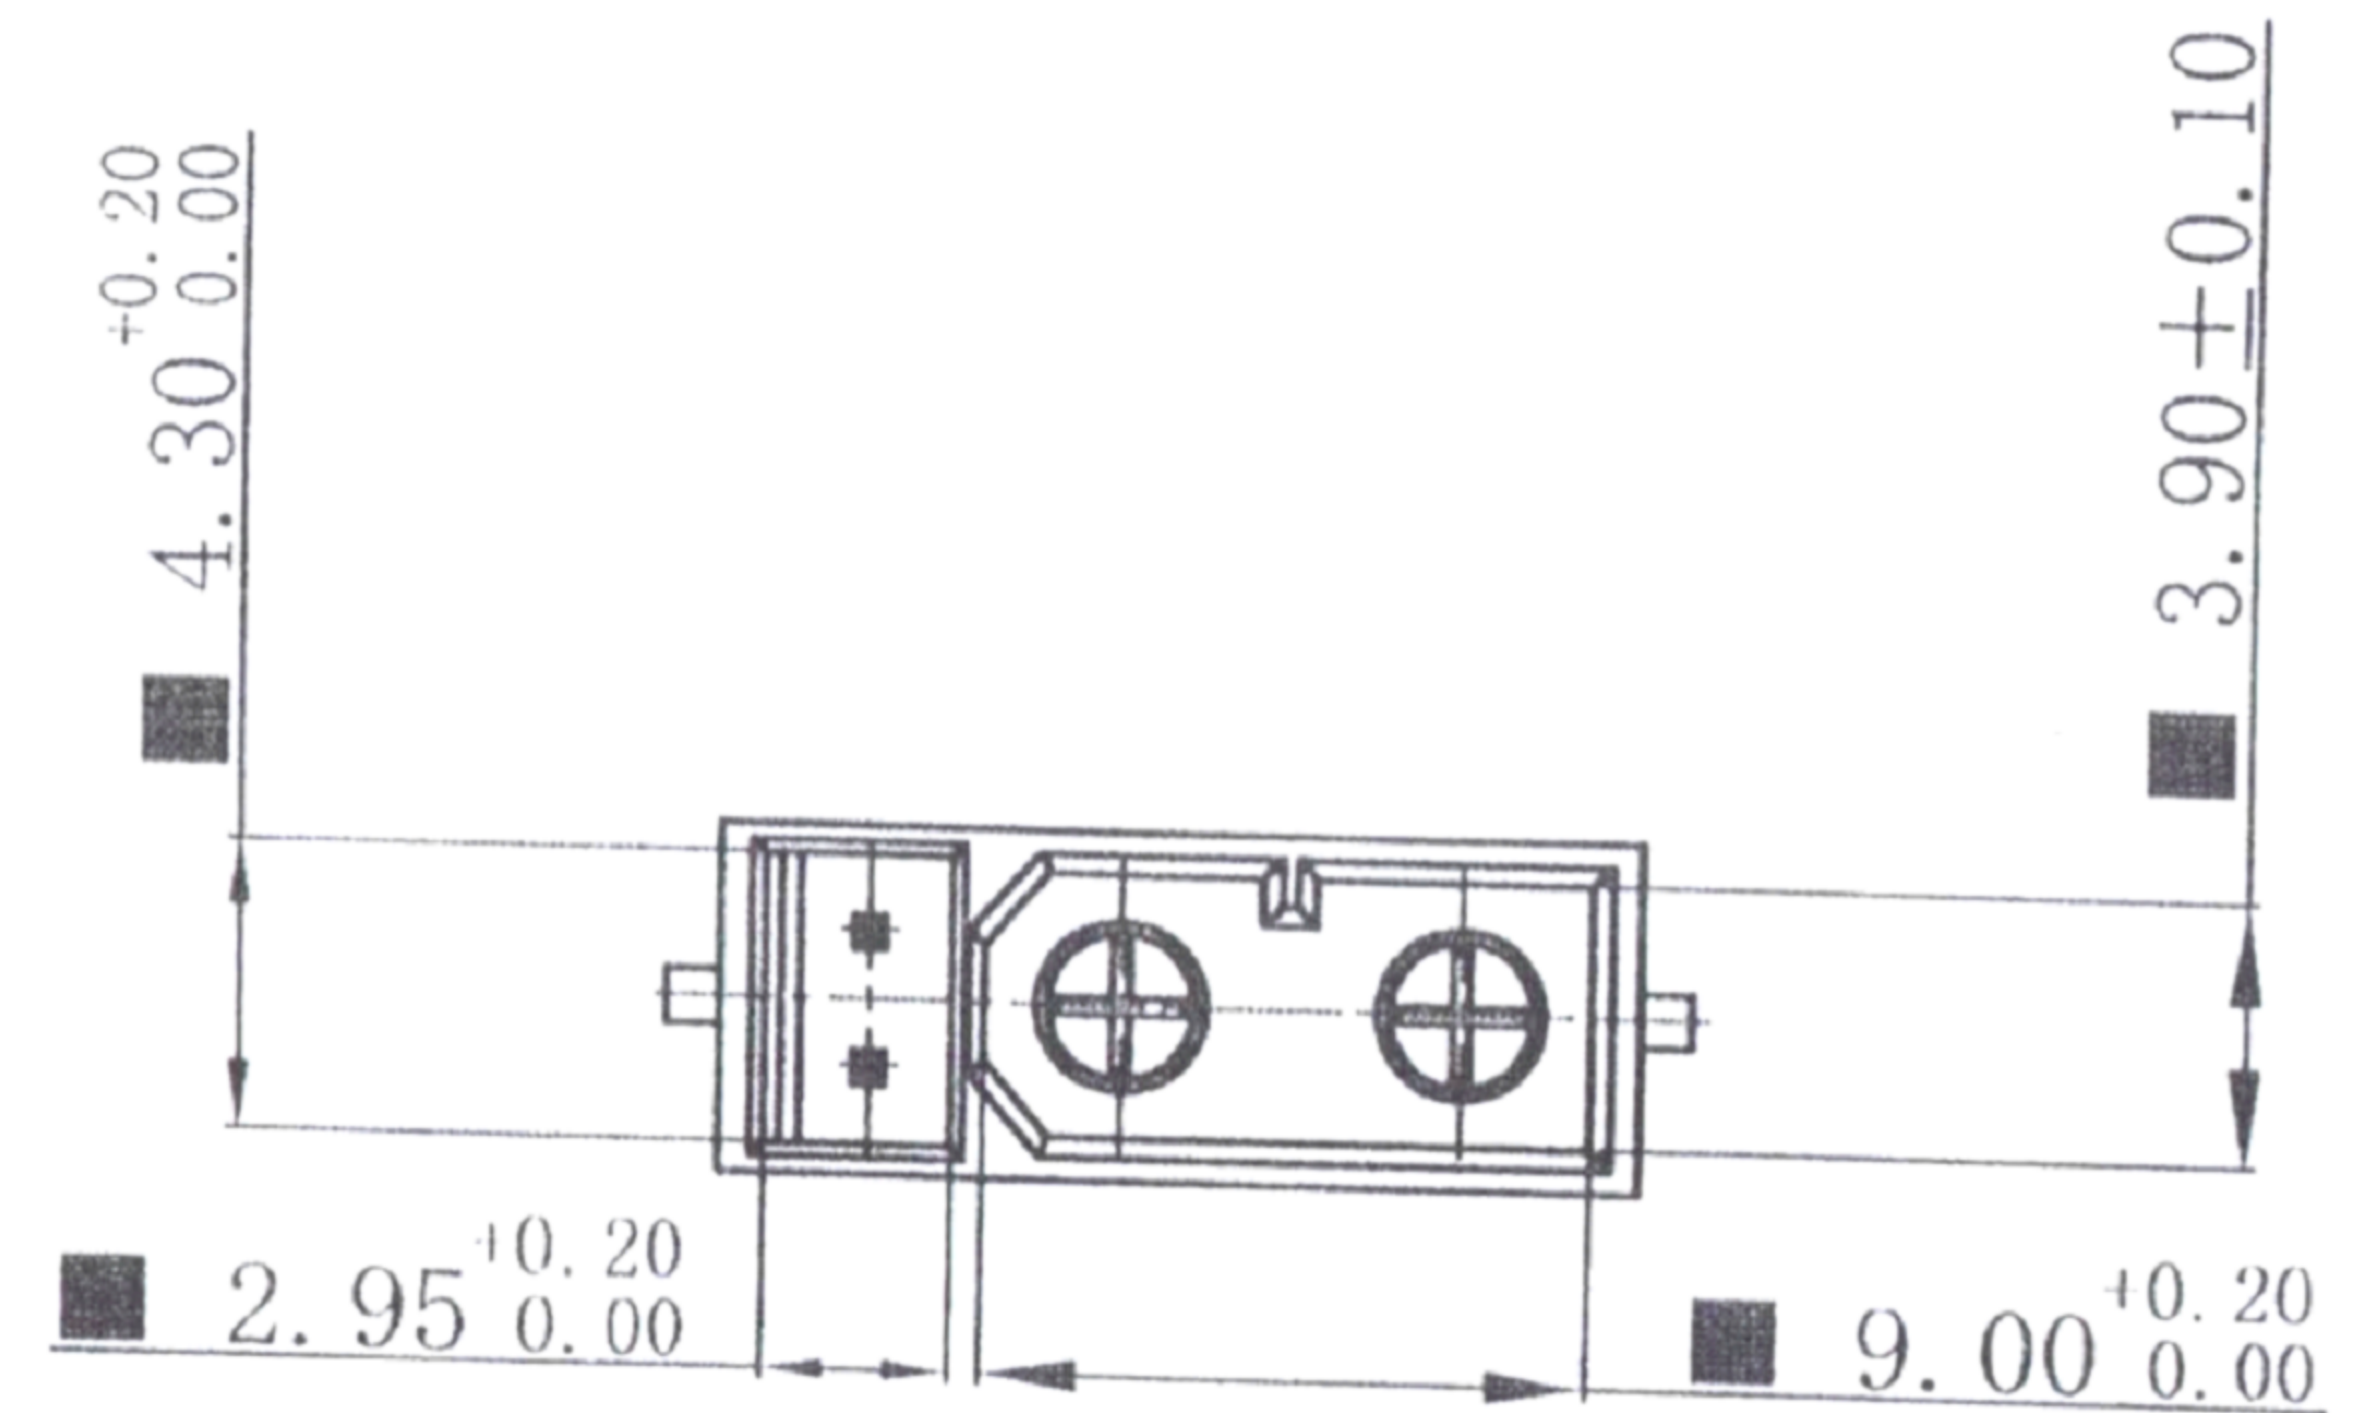
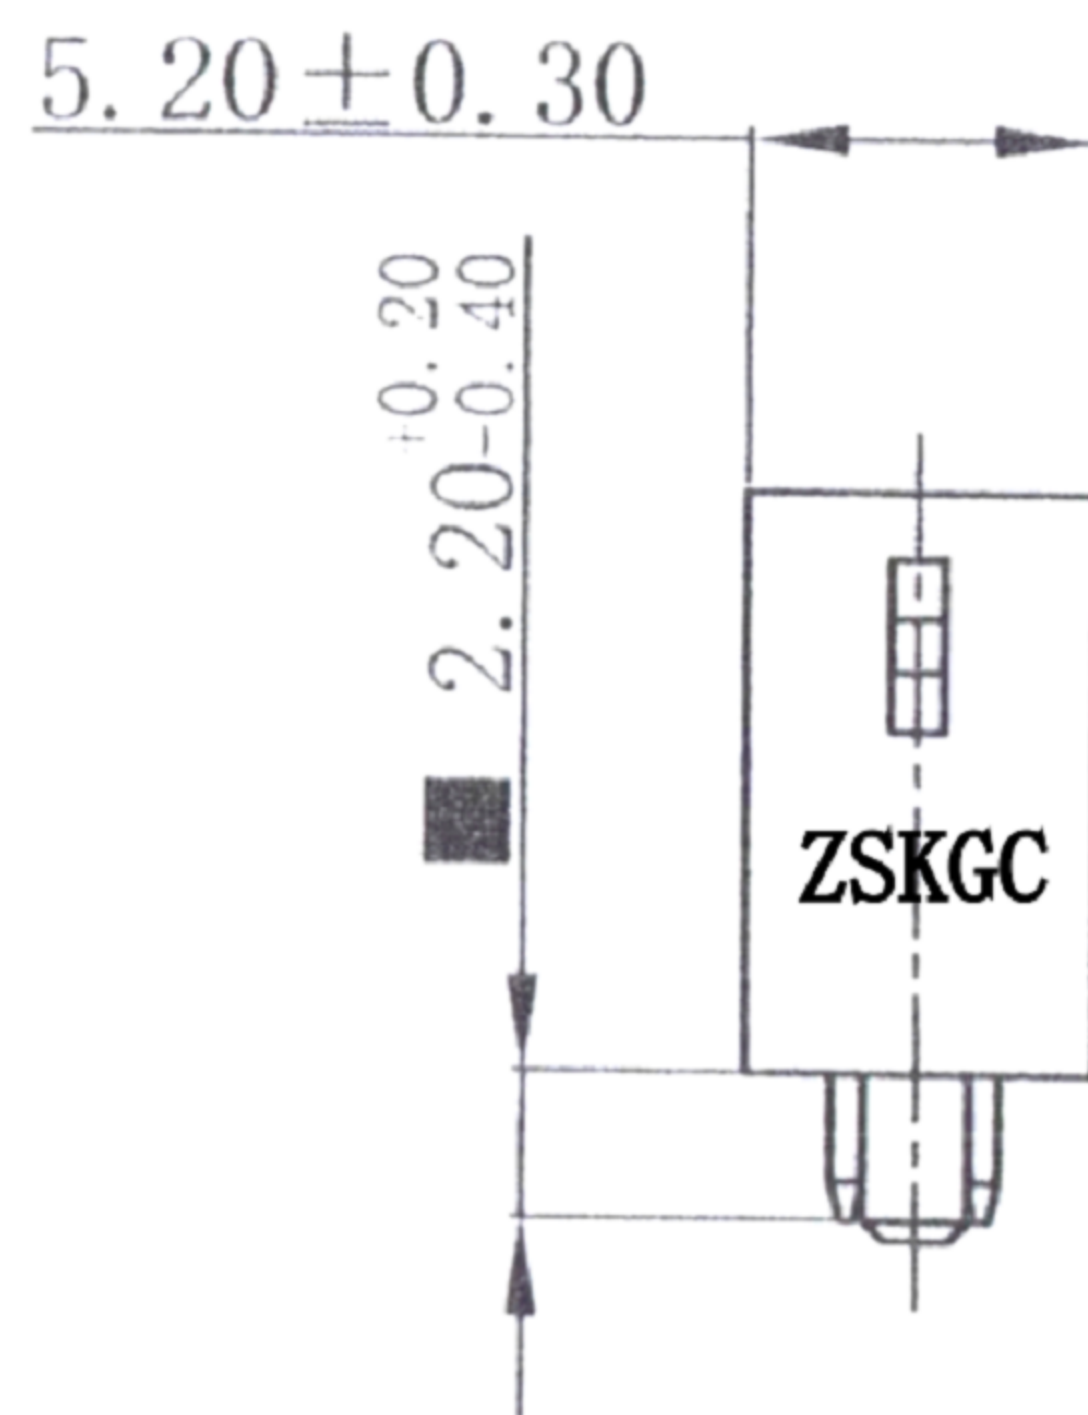
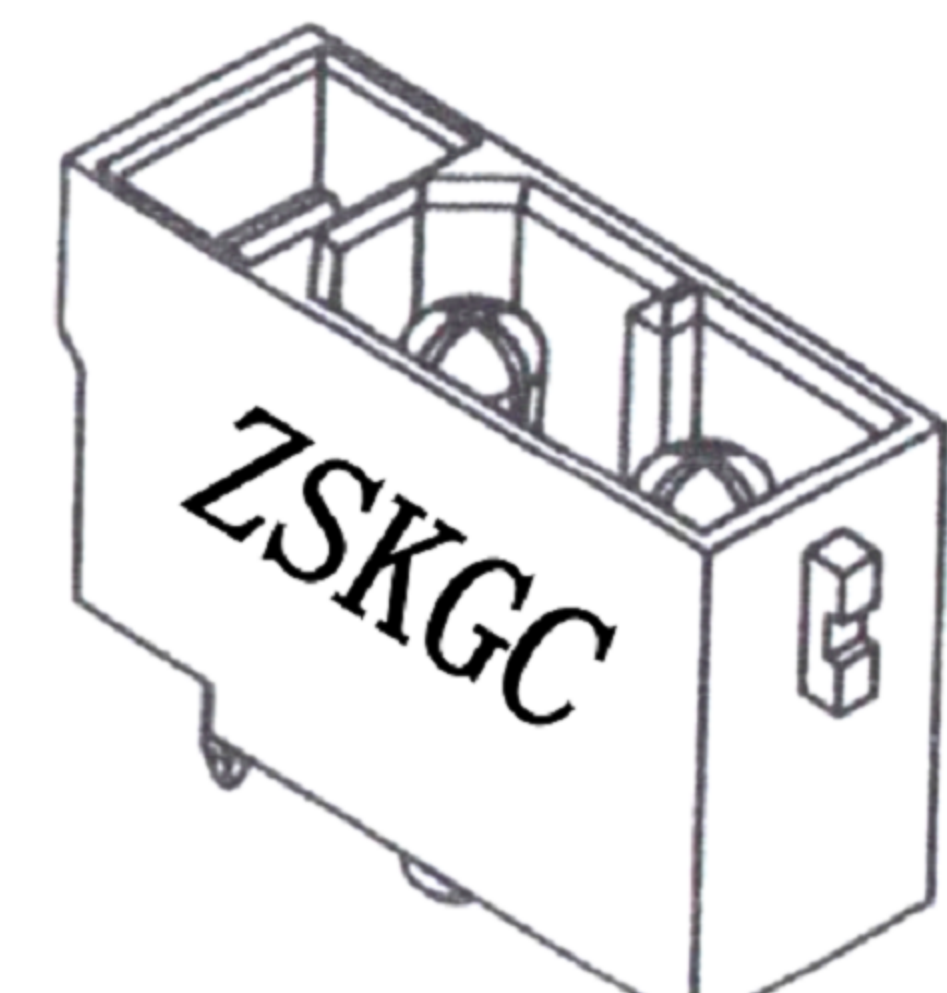
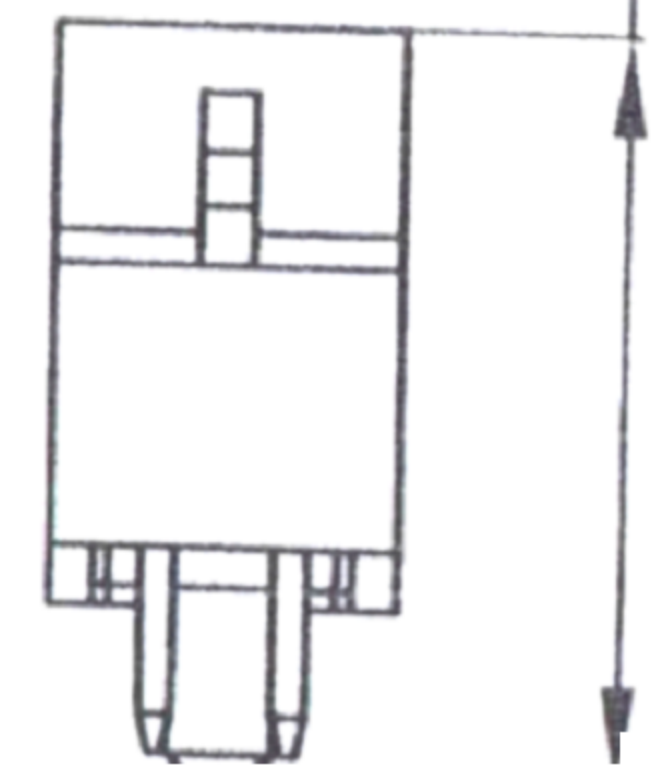
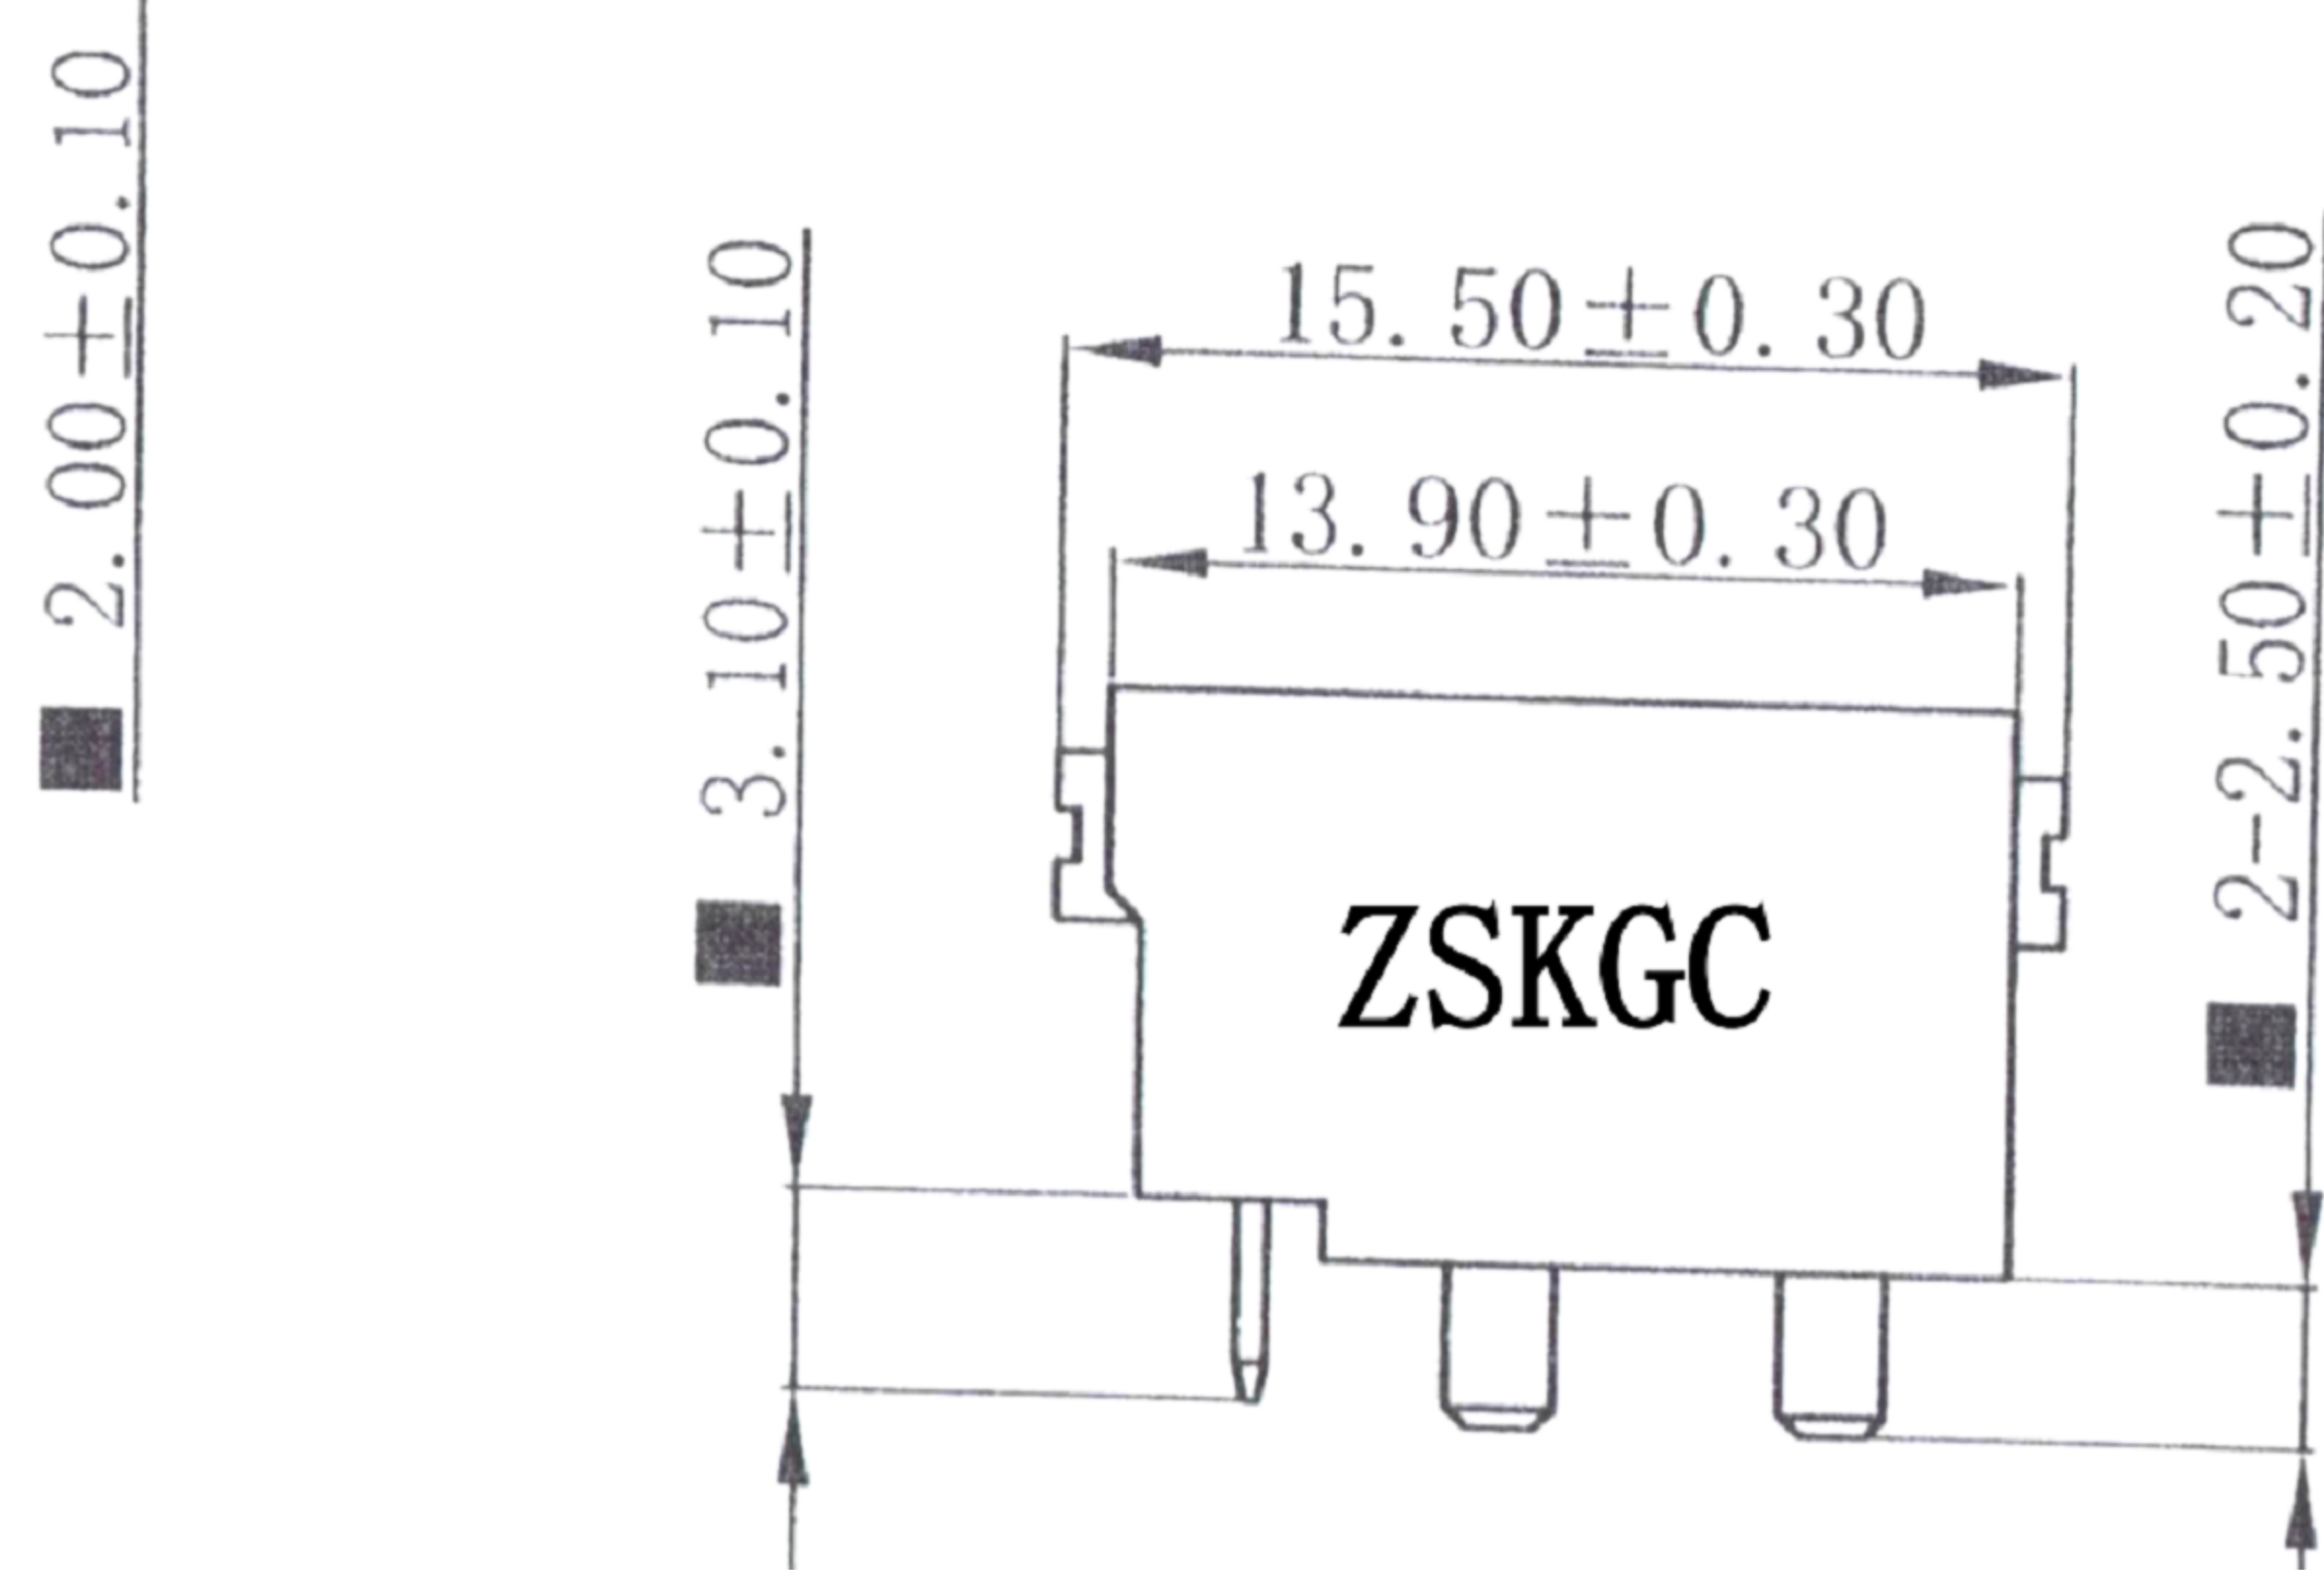


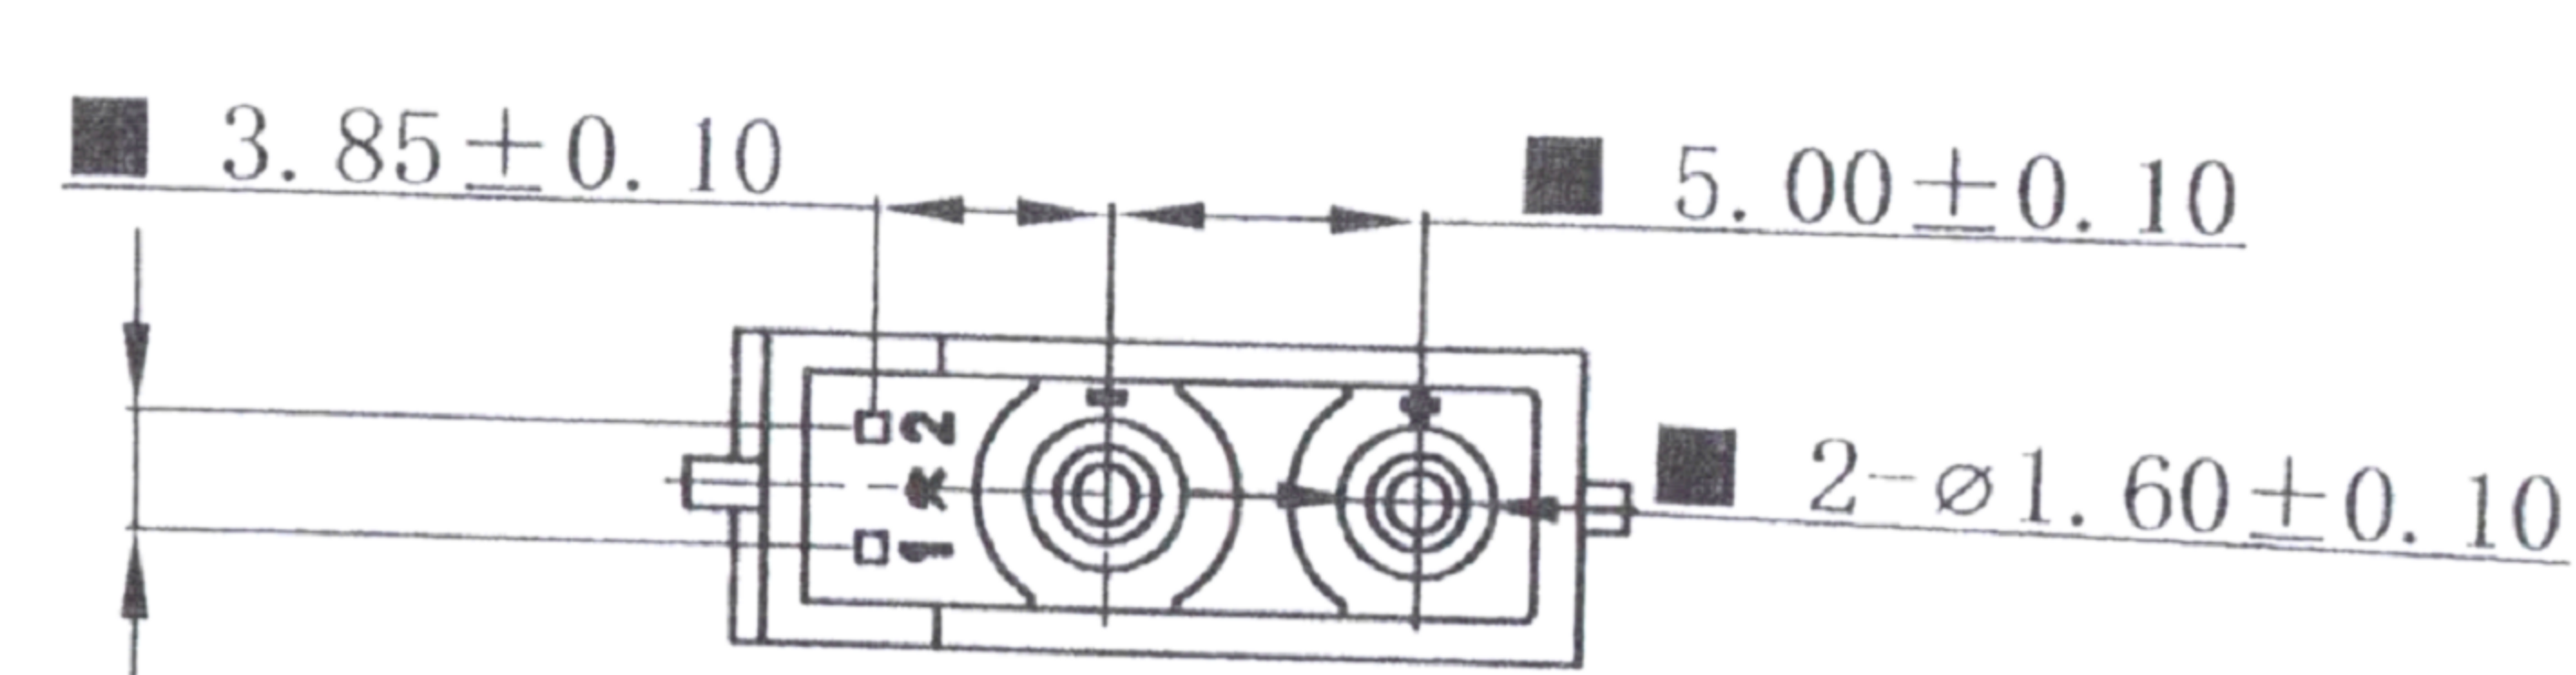


PCB LAYOUT

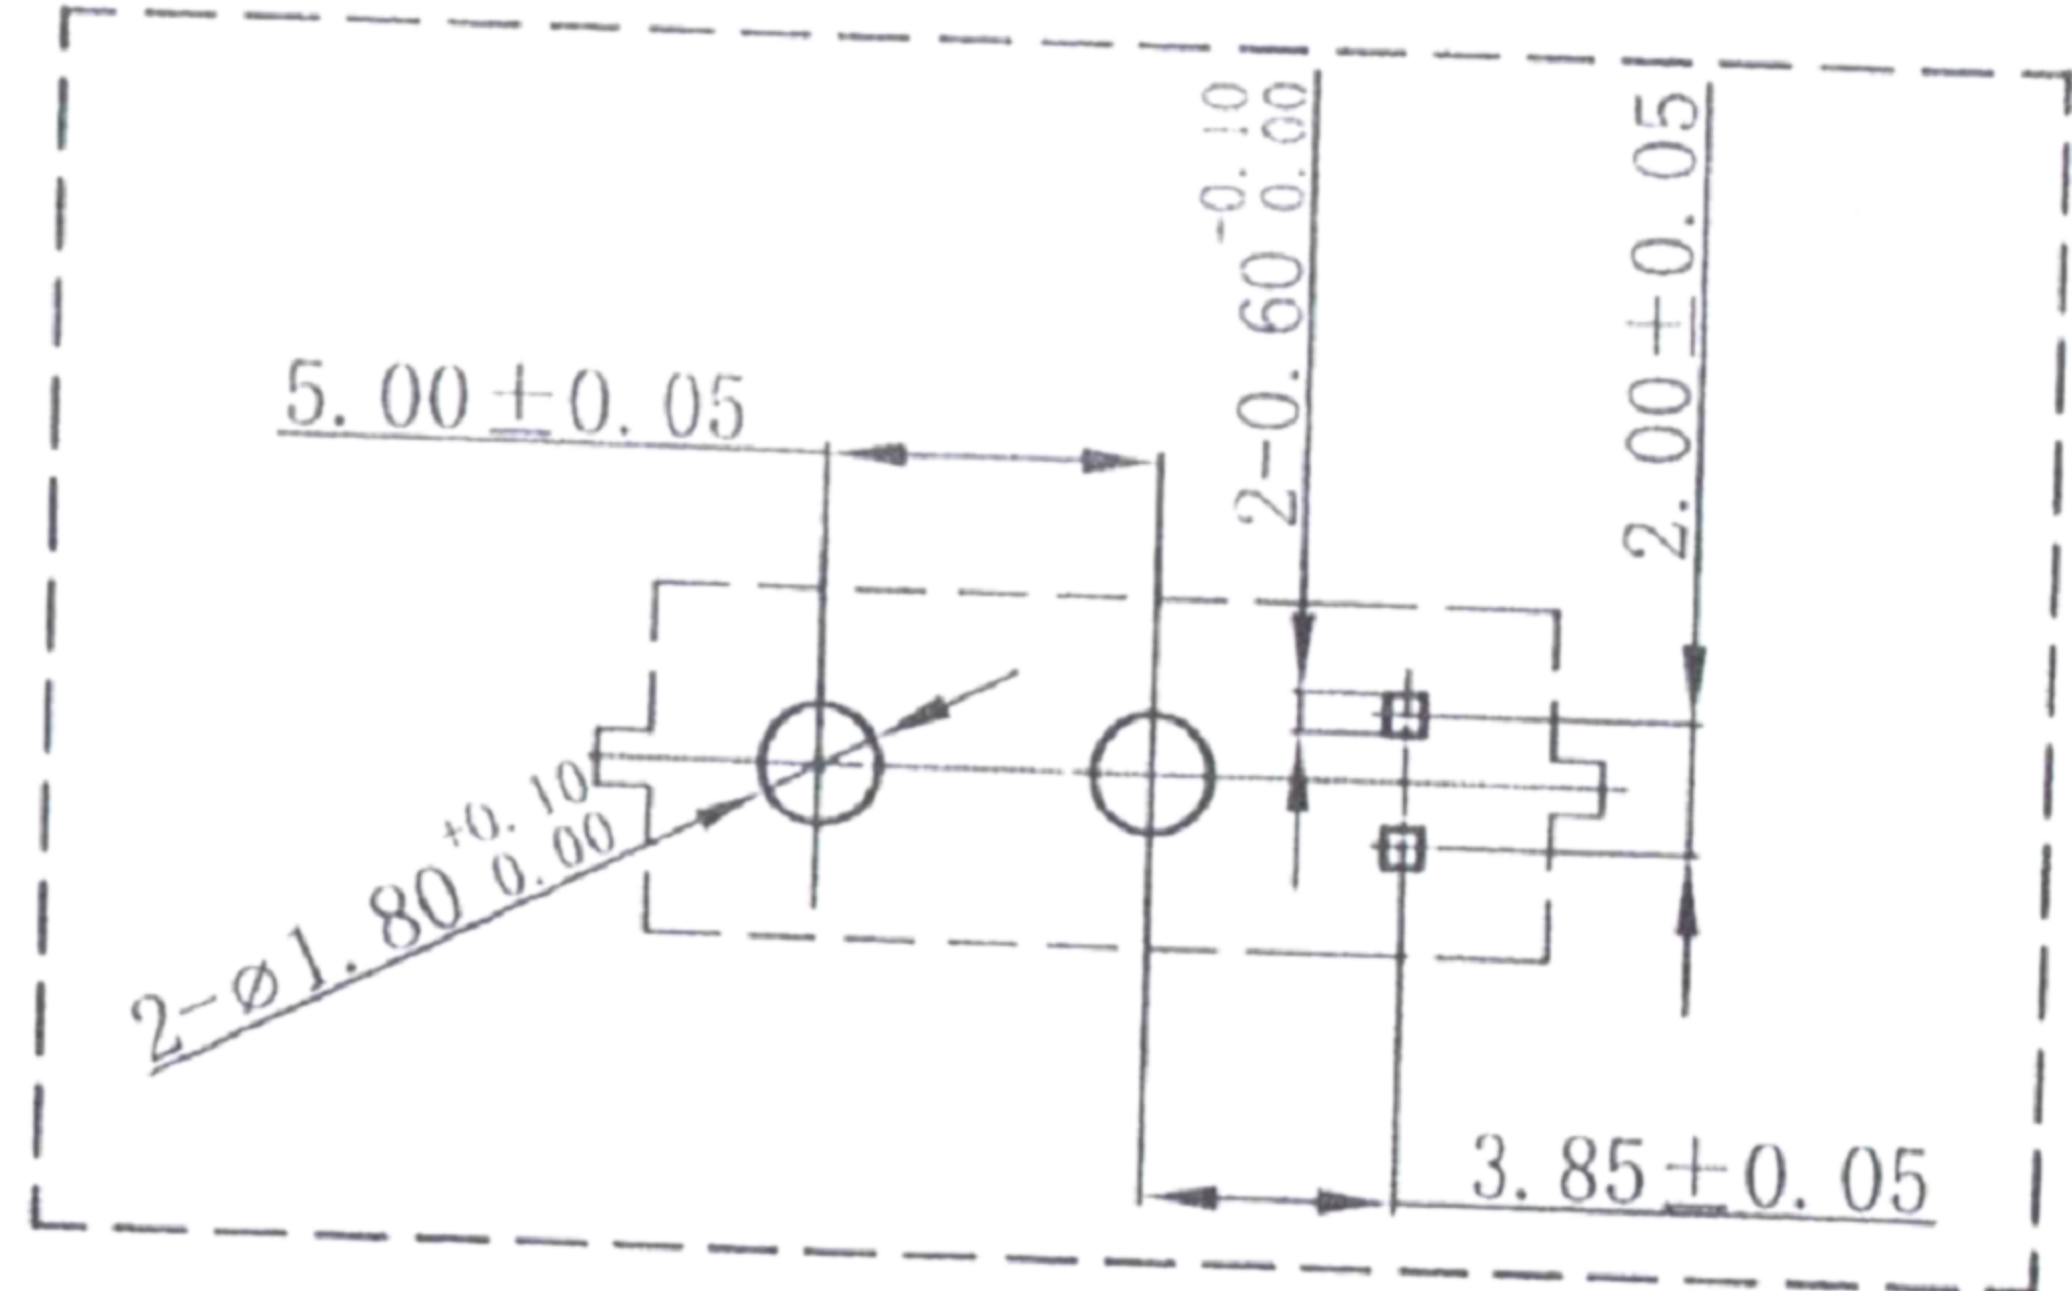

- 技术要求:
1. 表面光洁, 无加工污物及毛刺;
 2. 字迹、logo清晰, 有穴位号;
 3. 关键尺寸“▲”, 重要尺寸“■”, 参考尺寸“()”;
 4. 未注尺寸公差按GB / T14486-2008 MT5;
 5. 耐焊性及可焊性符合GB/T5095.6要求;
 6. 插拔力1.2kg-3.5kg;
 7. 表面镀金, 主铜件耐盐雾试验48h, 信号针耐盐雾试验24h, 5%NaCl溶

 东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:		Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angle	±0.2 ±0.3 ±0.4 ±0.5 ±0.3°	3RD. ANGEL'S		UNITS	MM
------------------------------------	--	--	---------------------------------------	-----------------	---	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	ENCODER
Ming Ming Zou	07/23/13			
CHECKED BY:	DATE	FINISH	MODLE	ENCODER
Ning Ning Su	07/23/13			
APPROVED BY:	DATE	SCALE	DWG NO.	ENCODER
Jia Xiang	07/23/13	1:1	GD-TX-30LX-G	
SHEET NO.		1 of 1	PART NO.	

SIZE	A4
VER	R2

2	公差及料號更新	Jack	072313
1	圖面更新	Frank Wu	021012
ITEM NO.	DESCRIPTION	DRAWN	DATE