

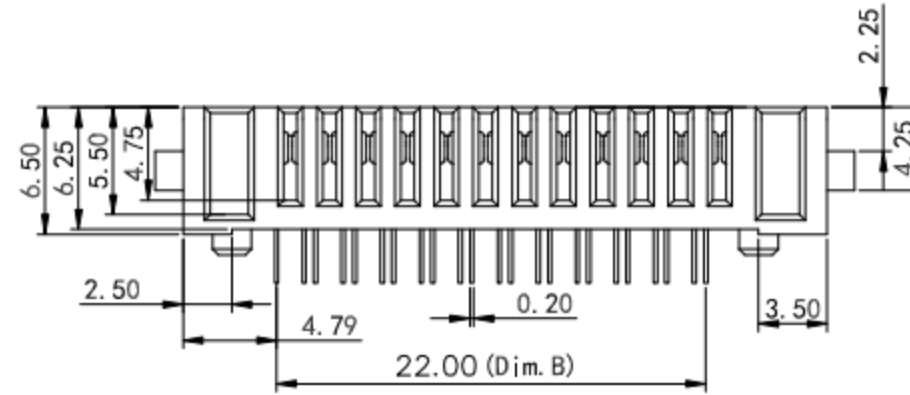
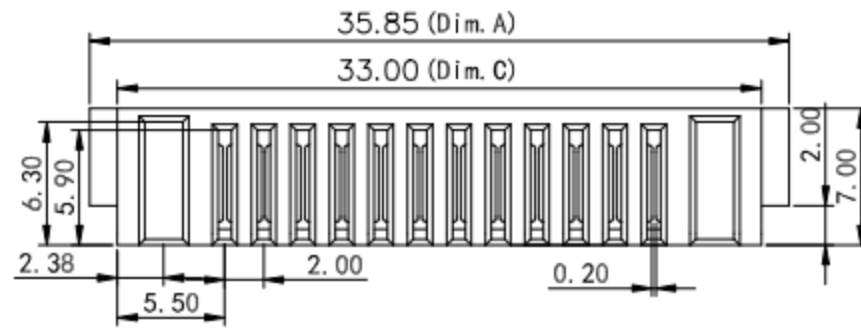
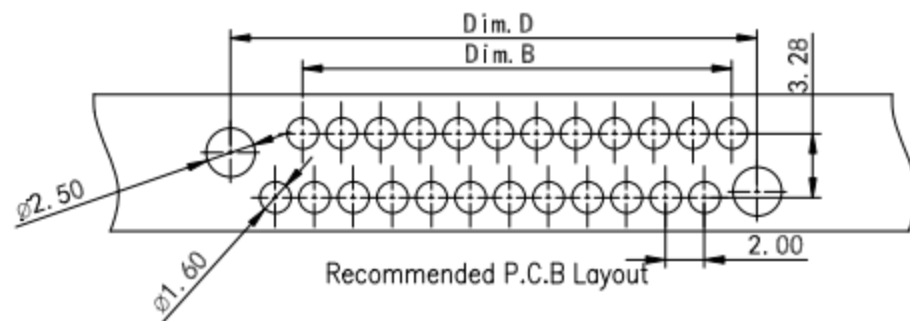


| REV. | ECN NO. | DESCRIPTION | DESIGN | DATE       |
|------|---------|-------------|--------|------------|
| A    |         | INITIAL     | Kai    | 2018.03.29 |

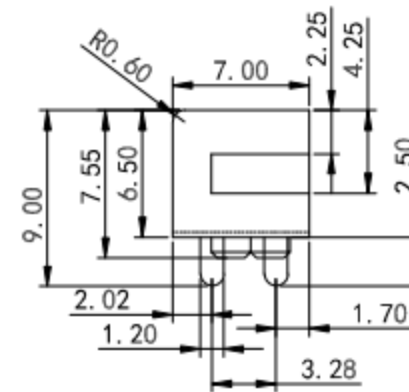

| No. of Pins | Dimension |       |       |       |
|-------------|-----------|-------|-------|-------|
|             | DIM.A     | DIM.B | DIM.C | DIM.D |
| 4           | 19.85     | 17.00 | 6.00  | 11.00 |
| 5           | 21.85     | 19.00 | 8.00  | 13.00 |
| 6           | 23.85     | 21.00 | 10.00 | 15.00 |
| 7           | 25.85     | 23.00 | 12.00 | 17.00 |
| 8           | 27.85     | 25.00 | 14.00 | 19.00 |
| 9           | 29.85     | 27.00 | 16.00 | 21.00 |
| 10          | 31.85     | 29.00 | 18.00 | 23.00 |
| 11          | 33.85     | 31.00 | 20.00 | 25.00 |
| 12          | 33.85     | 33.00 | 22.00 | 27.00 |

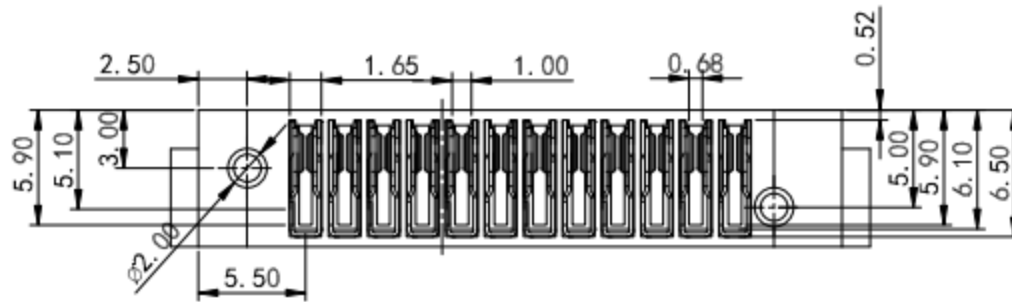

NOTE:

Material

Insulator:Nylon 9T(UL94V-0)

Contact:phosphor Bronze

Contact Plated:Gold over Nickel or Tin

Specification

Rated voltage: 12V 30V

Current rating: 5A 10A

instant CURRENT:12A

Contact Resistance:30MΩ

Insulation Resistance:100MΩ

Dielectric Voltage:1000V

Operdting Temperature:-40°~105°

UNLESS OTHERWISE  
SPECIFED TOLERANCES

东莞市高迪电子有限公司

DECIMALS: ANGLES:

DWG NO.

PART NAME:

DESIGN:

PART NO.


CHECK:

APPROVED

REV.  
A

UNIT:  
mm

SHEET:  
1/1



| ITEM | PART NAME | Q'TY | MATERTAL              | DESCRIPTION | REMARK |
|------|-----------|------|-----------------------|-------------|--------|
| ②    | HOUSING   | 1    | LCP                   |             | BLACK  |
| ①    | CONTACT A | 2    | PHOSPHOR BRONZE 0.20T | Au PLATED   |        |