

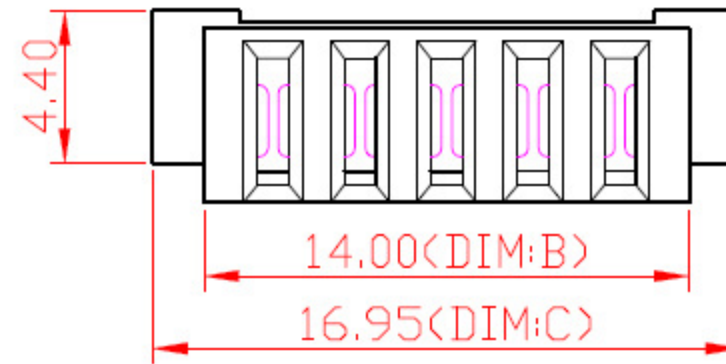
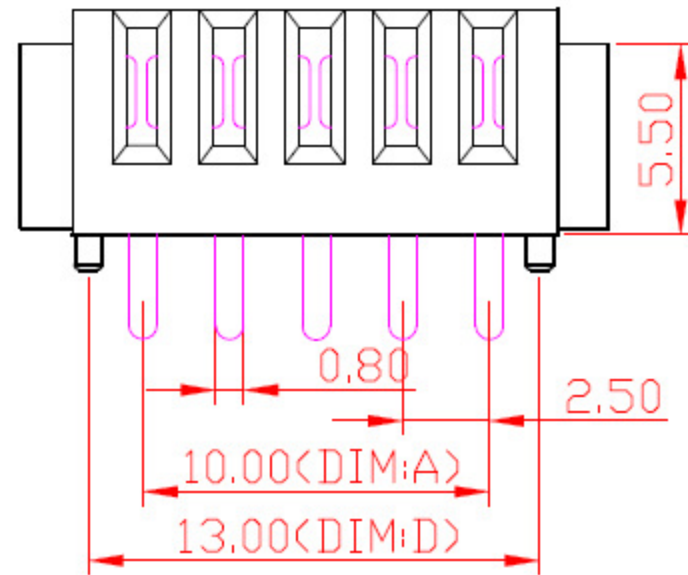


| REV. | ECN NO. | DESCRIPTION | DESIGN | DATE       |
|------|---------|-------------|--------|------------|
| A    |         | INITIAL     | Kai    | 2018.03.29 |

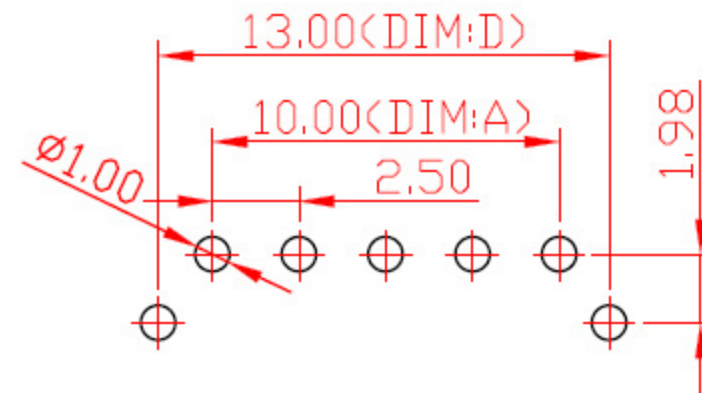

| No:of pins | Dimension |       |       |       |       |
|------------|-----------|-------|-------|-------|-------|
|            | DIM.A     | DIM.B | DIM.C | DIM.D | DIM.E |
| 03         | 5.00      | 9.00  | 11.95 | 8.00  | 3.0   |
| 04         | 7.50      | 11.50 | 14.45 | 10.50 | 3.0   |
| 05         | 10.00     | 14.00 | 16.95 | 13.00 | 3.0   |
| 06         | 12.50     | 16.50 | 19.45 | 15.50 | 3.0   |
| 07         | 15.00     | 19.00 | 21.96 | 18.00 | 3.0   |
| 08         | 17.50     | 21.50 | 24.45 | 20.50 | 3.0   |
| 09         | 20.00     | 24.00 | 26.95 | 23.00 | 3.0   |
| 10         | 22.50     | 26.50 | 29.45 | 25.50 | 3.0   |
| 11         | 25.00     | 29.00 | 31.95 | 28.00 | 3.0   |

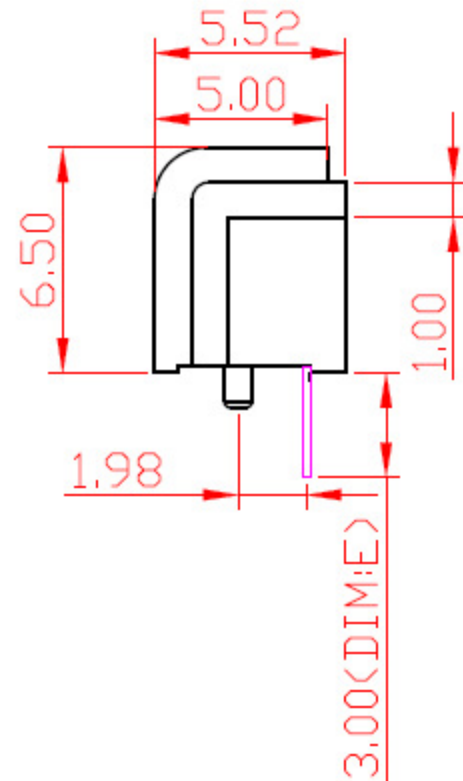

**Recommended P.C.B Layout**

Layout Tolerance=+/-0.05mm

NOTE:

Material

Insulator:Nylon 9T(UL94V-0)

Contact:phosphor Bronze

Contact Plated:Gold over Nickel or Tin

Specification

Rated voltage: 12V 30V

Current rating: 5A 10A

instant CURRENT:12A

Contact Resistance:30MΩ

Insulation Resistance:100MΩ

Dielectric Voltage:1000V

Operdting Temperature:-40°~105°

UNLESS OTHERWISE  
SPECIFED TOLERANCES

**东莞市高迪电子有限公司**

DECIMALS: ANGLES:

DWG NO.

PART NAME:

DESIGN:

PART NO.

CHECK:

APPROVED

REV.

UNIT:

SHEET:

A

mm

1/1



| ITEM | PART NAME | Q'TY | MATERTAL              | DESCRIPTION | REMARK |
|------|-----------|------|-----------------------|-------------|--------|
| ②    | HOUSING   | 1    | LCP                   |             | BLACK  |
| ①    | CONTACT A | 2    | PHOSPHOR BRONZE 0.20T | Au PLATED   |        |