
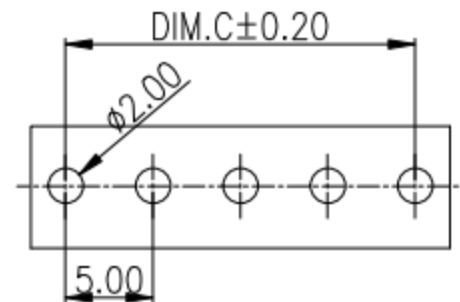
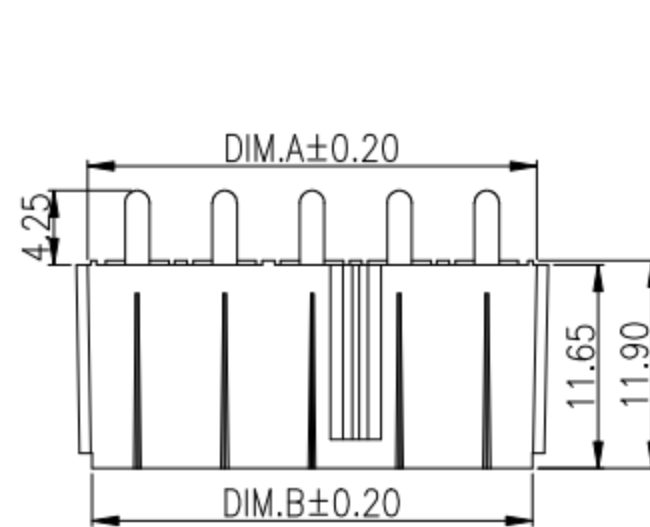
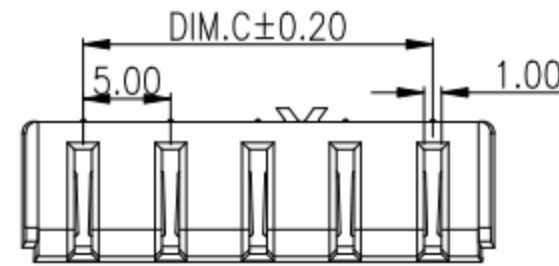
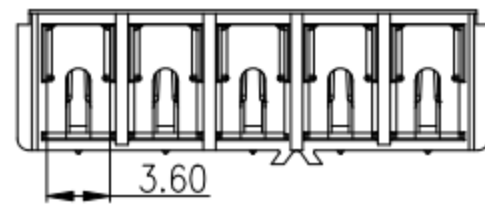
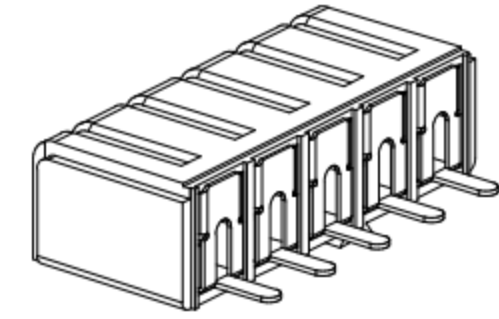
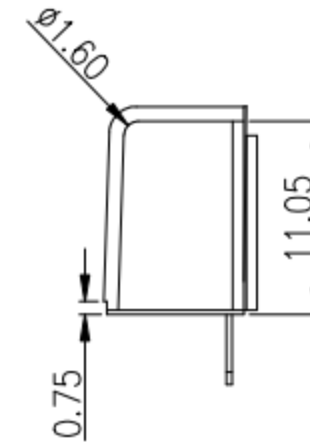
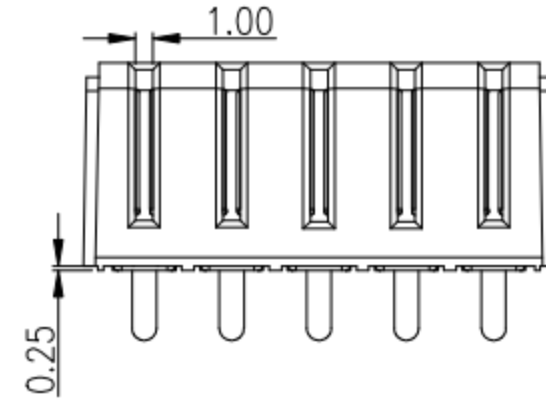


| REV. | ECN NO. | DESCRIPTION | DESIGN | DATE       |
|------|---------|-------------|--------|------------|
| A    |         | INITIAL     | Kai    | 2018.03.29 |

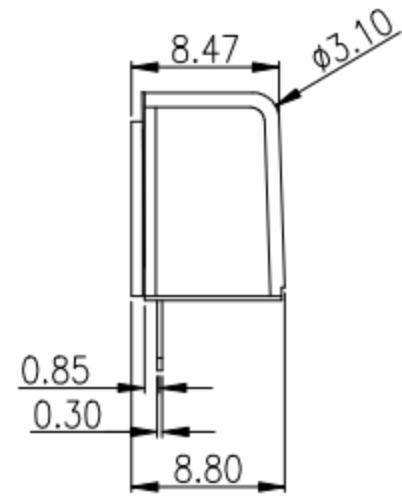

RECOMMENDED P.C.BOARD LAYOUT

| PIN   | Dim.A | Dim.B | Dim.C |
|-------|-------|-------|-------|
| 02pin | 10.70 | 10.20 | 5.00  |
| 03pin | 15.70 | 15.20 | 10.00 |
| 04pin | 20.70 | 20.20 | 15.00 |
| 05pin | 25.70 | 25.20 | 20.00 |

NOTE:

Material

Insulator:Nylon 9T(UL94V-0)

Contact:phosphor Bronze

Contact Plated:Gold over Nickel or Tin

Specification

Rated voltage: 12V 30V

Current rating: 3A 5A

instant CURRENT:7A

Contact Resistance:30MΩ

Insulation Resistance:100MΩ

Dielectric Voltage:1000V

Operdting Temperature:-40°~105°

UNLESS OTHERWISE  
SPECIFED TOLERANCES

DECIMALS:

ANGLES:

| DIM   | TOL   |
|-------|-------|
| X.    | ±0.50 |
| X.X   | ±0.30 |
| X.XX  | ±0.20 |
| X.XXX | ±0.10 |

| DIM   | TOL |
|-------|-----|
| X.    | ±2° |
| X.X   | ±1° |
| X.XX  | ±1° |
| X.XXX | ±1° |

DWG NO.

DESIGN:

CHECK:

APPROVED

PART NAME:

PART NO.

REV.

A

UNIT:

mm

SHEET:

1/1



| ITEM | PART NAME | Q'TY | MATERTAL              | DESCRIPTION | REMARK |
|------|-----------|------|-----------------------|-------------|--------|
| ②    | HOUSING   | 1    | LCP                   |             | BLACK  |
| ①    | CONTACT A | 2    | PHOSPHOR BRONZE 0.20T | Au PLATED   |        |

东莞市高迪电子有限公司