
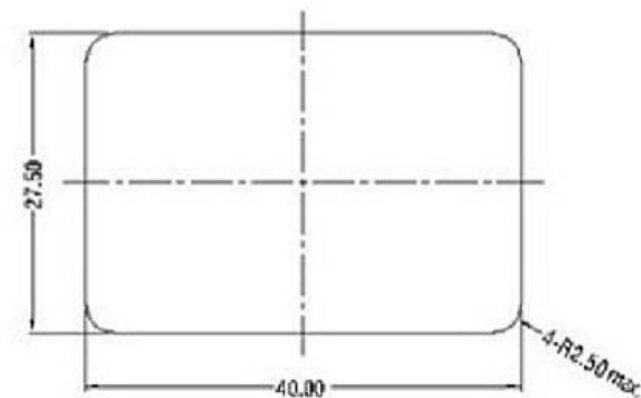
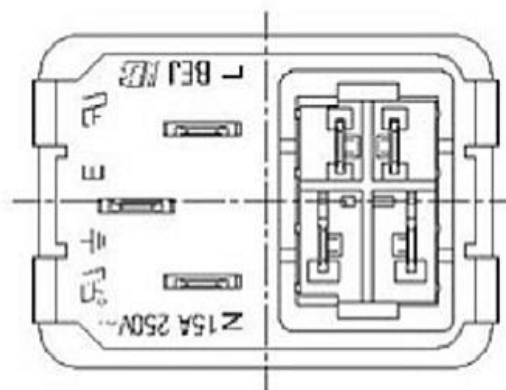
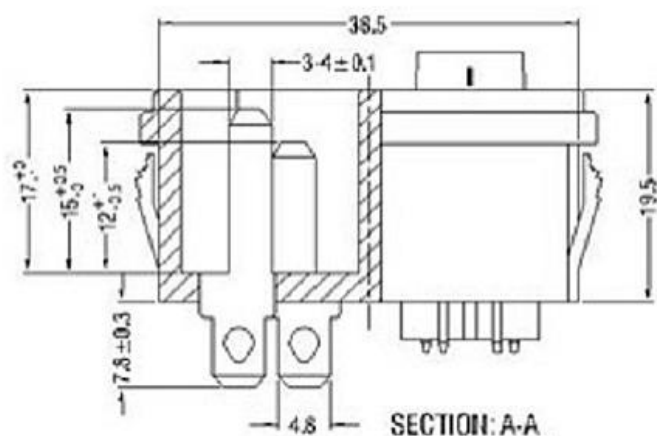
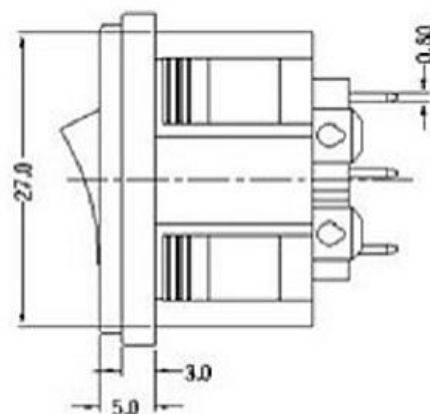


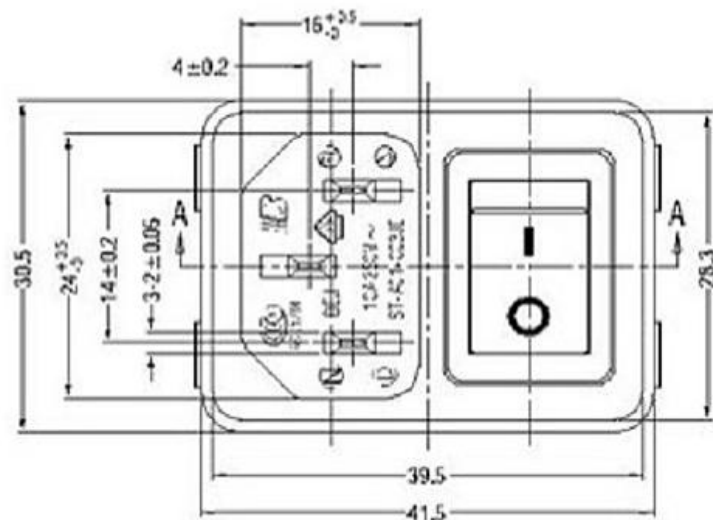

SPEC:

A. Material:

1.Housing: PA66

2.Terminal: COPPER ALLOY, TIN PLATED

B.Electrical Characteristics:

1.Rating: 15A 250V~ (UL,CUL)

10A 250V~(CCC,VDE,SEMKO,NEMKO,FIMKO,DEMKO)

2.Electric Strength: AC 2,000 V FOR ONE MINUTE

3.Insulation Resistance: 100MΩ MIN, AT 500V DC

C.Approvals:

UL, CUL, CCC, VDE, SEMKO, NEMKO, FIMKO, DEMKO

普通公差

COMMON TOLERANCE :

UP TO 5	±0.20
ABOVE 5 TO 30	±0.30
ABOVE 30	±0.50
ANGULAR	±5°

单位	mm
绘图	林晓良
日期	19. 08. 12

投影	核 对	核 准
PROJECTED	CHECKED BY	APPROVAL BY



东莞市高迪电子有限公司

品 名	AC POWER JACK
型 号	
料 号	KD-AC电源插座
PRODUCT NAME	
MODEL NO.	
PART NO.	

REV.	DATE	REVISION DESCRIPTION	ISSUE