
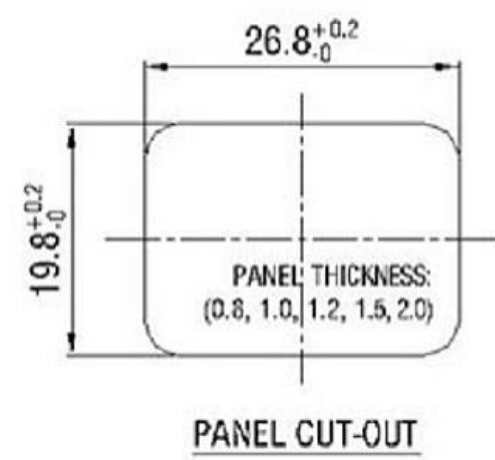
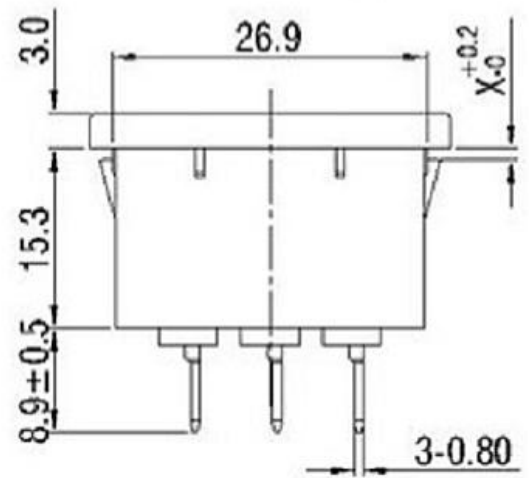
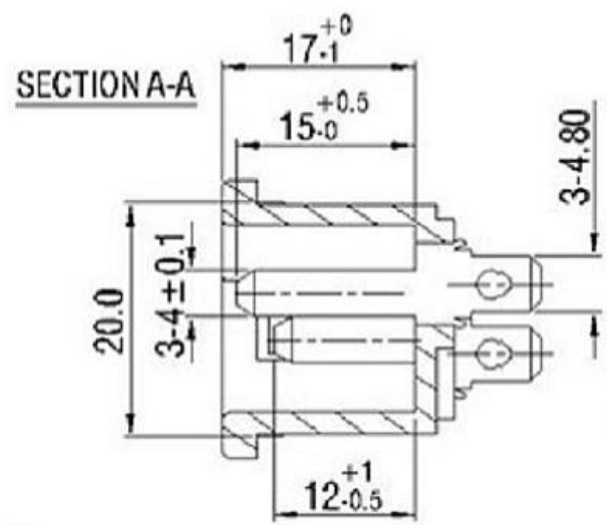


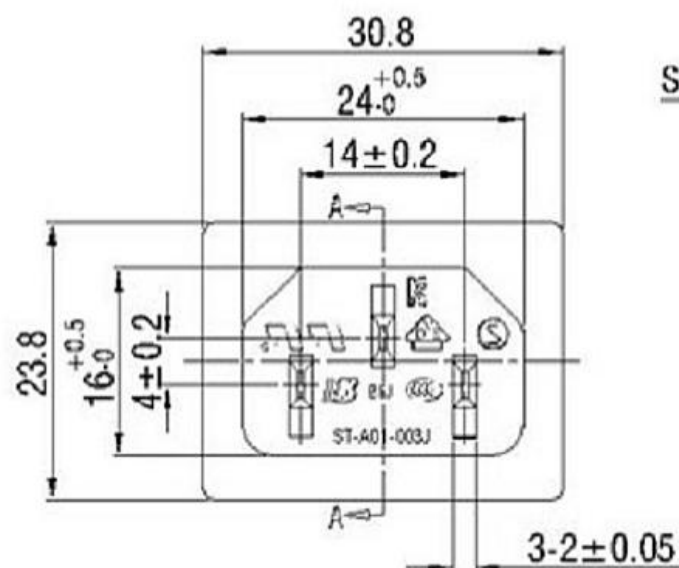

SPEC:

A. Material:


1. Housing: PA66(HP)
2. Terminal: COPPER ALLOY, TIN PLATED

B. Electrical Characteristics:

1. Rating: 15A 250V~ (UL,CUL)
10A 250V~ (CCC,VDE,SEMKO,KC)
2. Electric Strength: AC 2,000 V FOR ONE MINUTE
3. Insulation Resistance: 100MΩ MIN, AT 500V DC

C. Approvals:

UL, CUL, CCC, VDE, SEMKO, KC

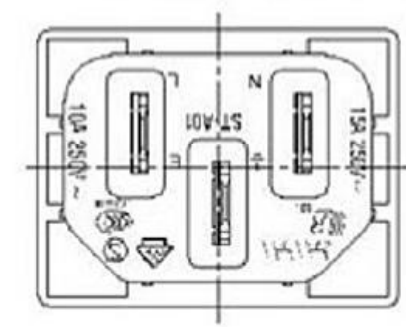

Part No.:	DIM. X
ST-A01-003JY(0.8HP)	0.9
ST-A01-003JY(1.0HP)	1.0
ST-A01-003JY(1.2HP)	1.3
ST-A01-003JY(1.5HP)	1.6
ST-A01-003JY(2.0HP)	2.1

普通公差
COMMON TOLERANCE :

UP TO 5	±0.20
ABOVE 5 TO 30	±0.30
ABOVE 30	±0.50
ANGULAR	±5°



东莞市高迪电子有限公司

REV.	DATE	REVISION DESCRIPTION	ISSUE	单位	mm	投影	品名	AC POWER JACK
				UNIT		PROJECTED	PRODUCT NAME	
				绘图	林晓良	核对	型号	
				DRAWN BY		CHECKED BY	MODEL NO.	
				日期	19. 08. 12	核准	料号	KD-AC电源插座
				DATE		APPROVAL BY	PART NO.	