
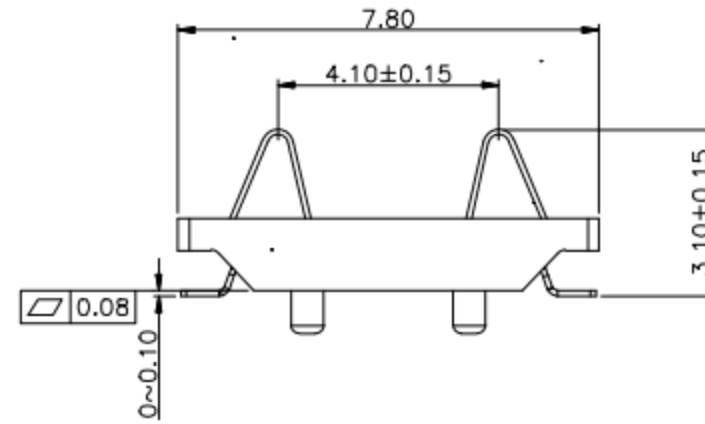
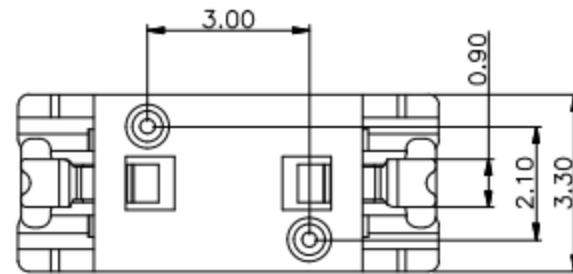

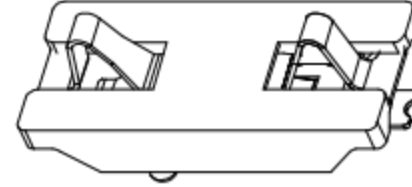


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29

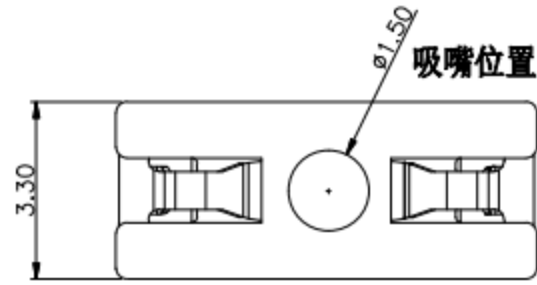

技术要求

1、ELECTRICAL CHARACTERISTICS(电气性能):

1.1 Rating(额定值): DC 50V 0.5A

1.2 Contact Resistance(接触电阻): 40mΩ Max

1.3 Insulation Resistance(绝缘电阻): ≤500MΩ

2、ELECTRICAL temperature rang(使用温度范围): -10° C~+60°

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:

ANGLES:

DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	±0.5°
X.XXX	±0.10	X.XXX	±0.2°

东莞市高迪电子有限公司

DWG NO.

PART NAME:

DESIGN:

PART NO.


CHECK:

APPROVED

REV.

UNIT:

SHEET:



ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK
②	HOUSING	1	LCP		BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED	