
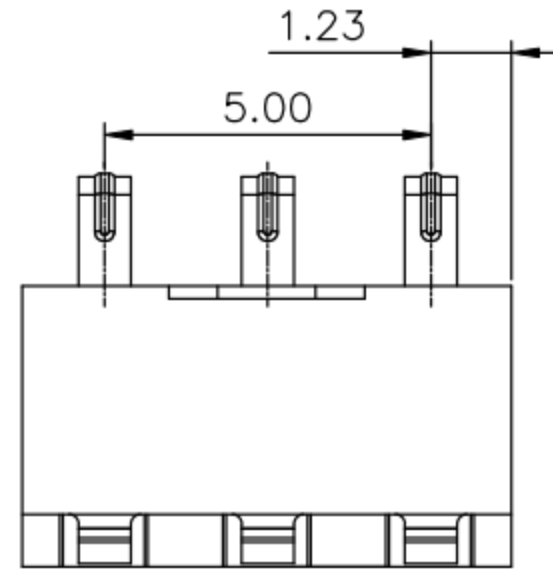
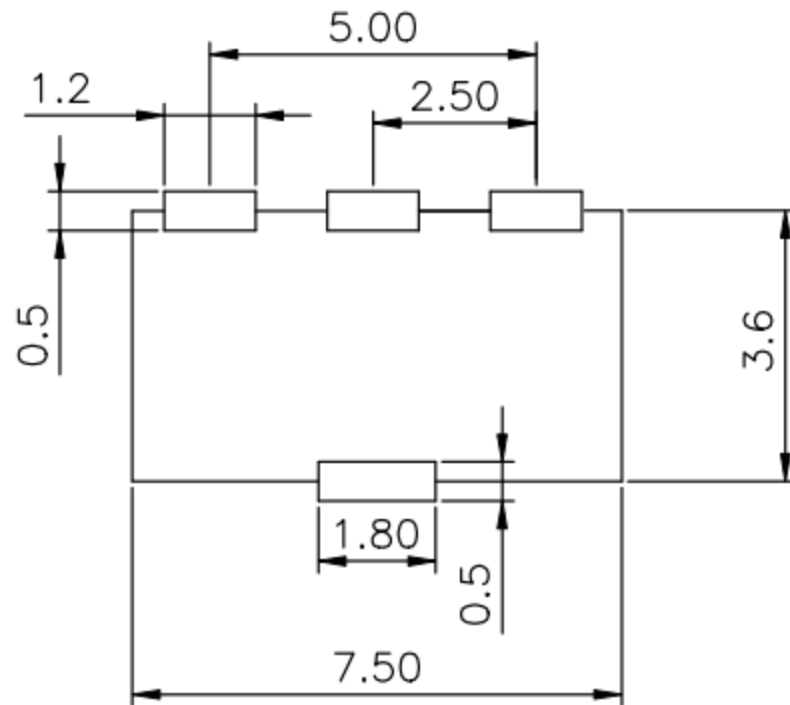
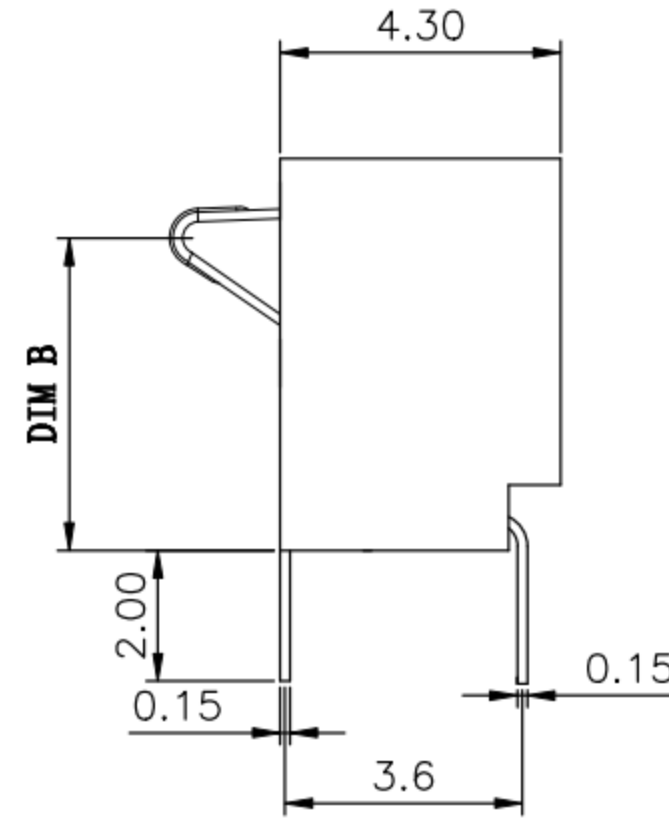


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29

DIM A	DIM B
5.4	4.2
6.0	4.7
7.0	5.6
8.0	6.7

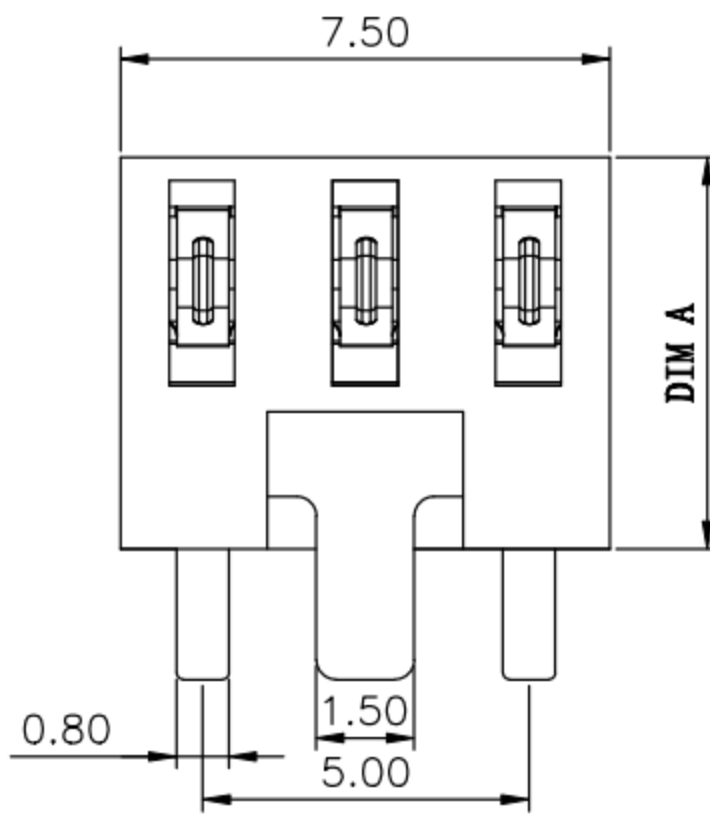

性能:
额定电流: 3.0A
额定电压: 24V
耐电压: 500V
接触电阻: 30mΩ MAX
绝缘电阻: 500MΩ
工作温度: -40℃~+85℃
塑件(材质): LCP, 耐高温260℃
接触点(材质): 铜合金, 触点镀金3U'

RECOMMENDED PCB LAYOUT
TOP VIEW(.XX±0.05)

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	±0.5°
X.XXX	±0.10	X.XXX	±0.2°

东莞市高迪电子有限公司

DWG NO.		PART NAME:	
DESIGN:		PART NO.	
CHECK:		REV.	A
APPROVED		UNIT:	mm
		SHEET:	1/1

ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK
②	HOUSING	1	LCP		BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED	