
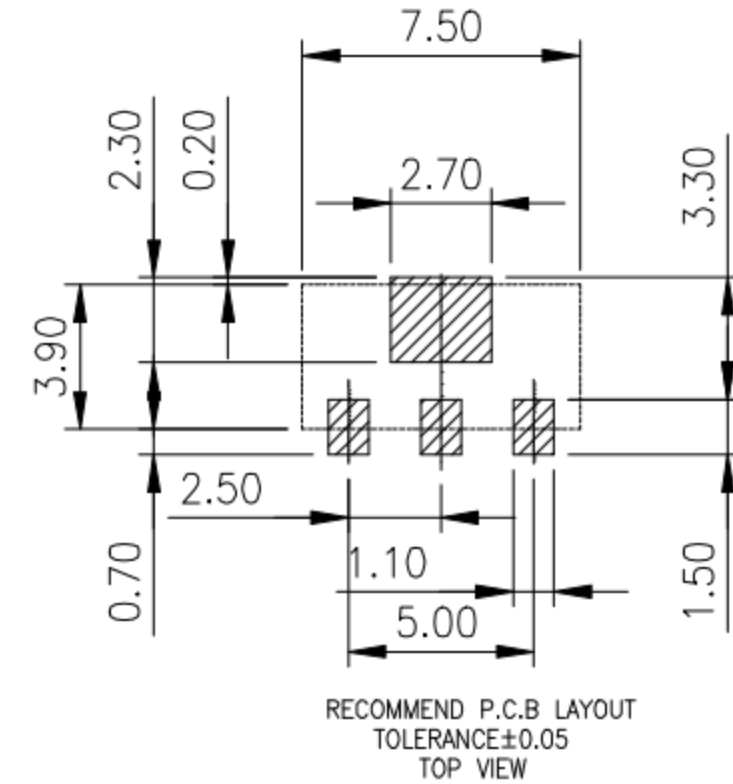


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29

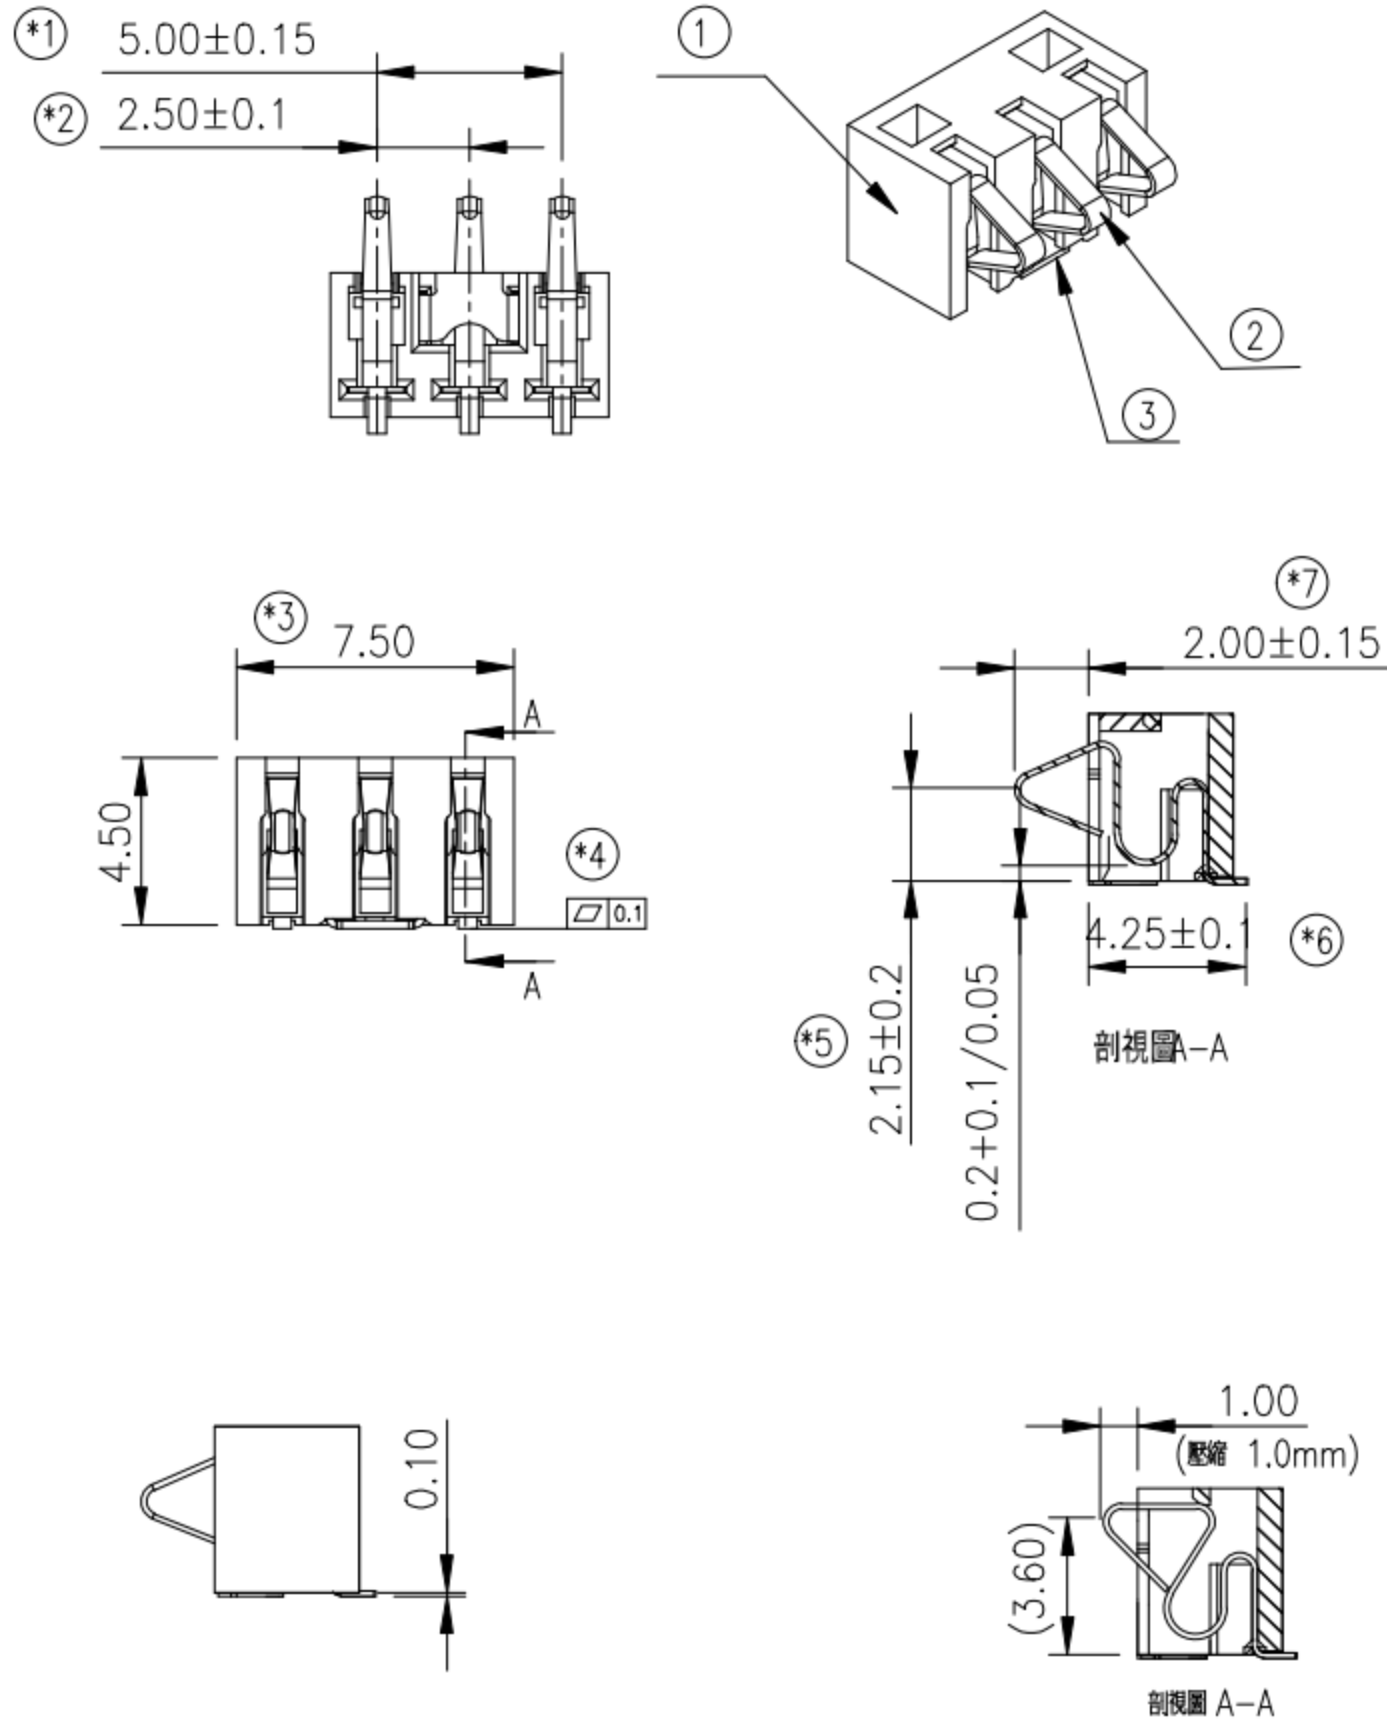

性能:
额定电流: 3.0A
额定电压: 24V
耐电压: 500V
接触电阻: $30\text{m}\Omega$ MAX
绝缘电阻: $500\text{M}\Omega$
工作温度: $-40^\circ\text{C} \sim +85^\circ\text{C}$
塑件(材质): LCP, 耐高温 260°C
接触点(材质): 铜合金, 触点镀金3U'

ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK
②	HOUSING	1	LCP		BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED	

UNLESS OTHERWISE SPECIFED TOLERANCES				东莞市高迪电子有限公司			
DECIMALS:		ANGLES:		DWG NO.	PART NAME:		
DIM	TOL	DIM	TOL	DESIGN:	PART NO.		
X.	± 0.50	X.	$\pm 2^\circ$	CHECK:	REV.	UNIT:	SHEET:
X.X	± 0.30	X.X	$\pm 1^\circ$	APPROVED	A	mm	1/1
X.XX	± 0.20	X.XX					
X.XXX	± 0.10	X.XXX					