


A: Output signal A  
B: Output signal B

#### SPECIFICATIONS

1. Rating : DC 10V , 1 mA Max ;
2. Circuit : 1C - 1P ;
3. Operating force : 25 ± 10 gf ;
4. Contact resistance : 100 mΩ Max ;
5. Travel : 0.25 ± 0.1 mm ;
6. Life : 150,000 Cycles Min °  
(each upright and opposite roate)

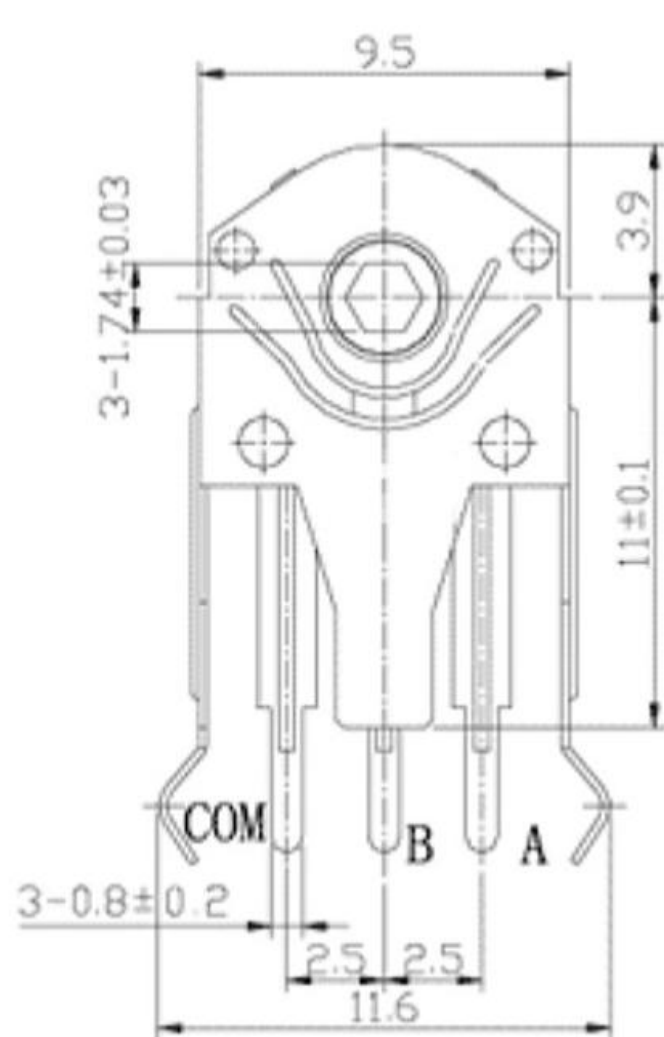

东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch JacK Co., Ltd.

TOLERANCE UNLESS  
OTHERWISE STATED :

Up to 5 ± 0.2  
Above 5 ~ 15 ± 0.3  
Above 15 ~ 30 ± 0.4  
Above 30 ~ 50 ± 0.5  
Angle ± 0.3

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY: Frank Wu  
CHECKED BY: Jacky Chen  
APPROVED BY: Tony Kao

DATE  
10/17/11  
DATE  
10/17/11  
DATE  
10/17/11

MAT'L  
FINISH  
SCALE  
SHEET NO.

TITLE  
MODLE  
DWG NO.  
PART NO.

K50-A  
K50-A

SIZE  
A4  
VER  
A