


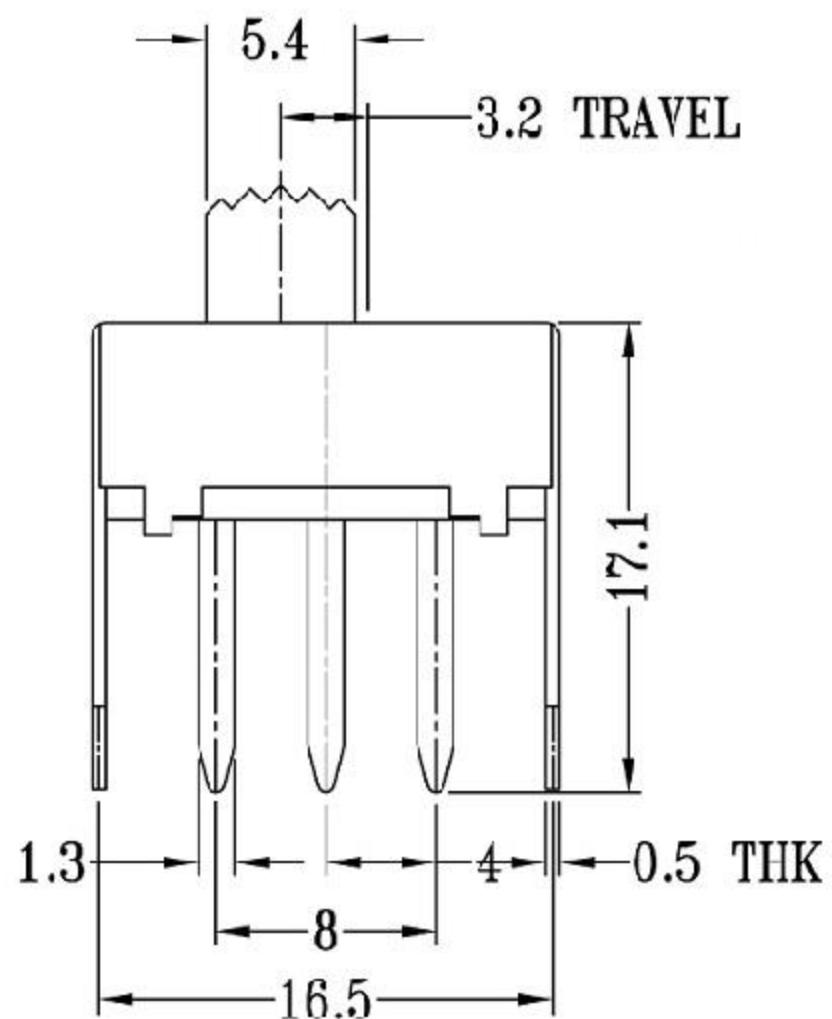



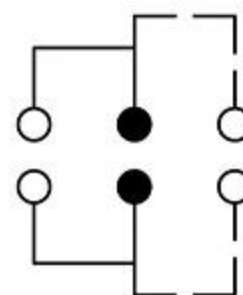

注:“*”表示关键尺寸(6个)

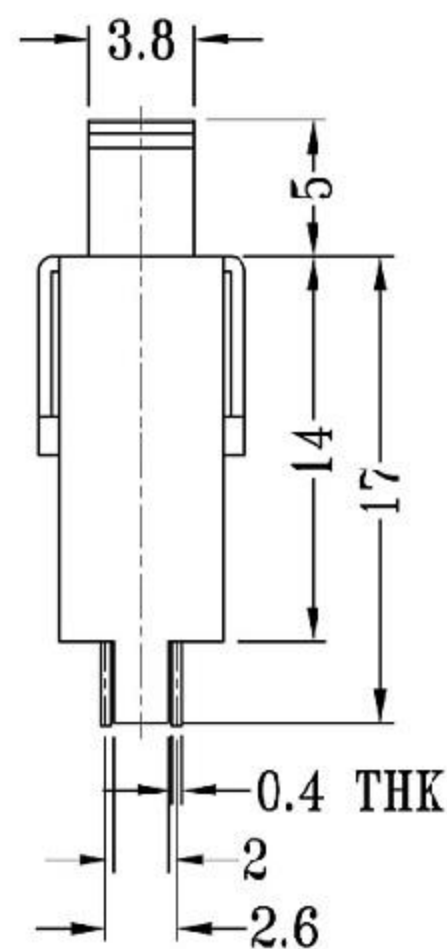

SCHEMATIC (NON-SHORTING)

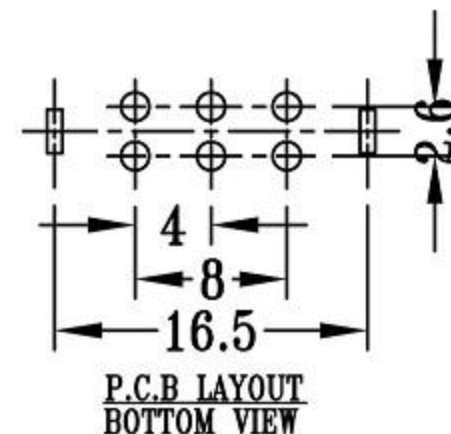

拨动开关立式技术参数:

1. 额定负荷: DC 30V 50V 0.3A 0.5A
2. 接触阻抗: $\leq 50\text{m}\Omega$
3. 绝缘阻抗: $\geq 100\text{m}\Omega$ DC500V
4. 耐焊温度: $250\pm 5^{\circ}$ 5s
5. 使用寿命: 10,000 cycles
6. 使用温度: -25°C to 80°C
7. 使用湿度: $\leq 85\%\text{RH}$
8. 操作力 : 160gf 256gf 300gf 可定制
9. 手柄长度: 2mm-10mm 可定制

[illegible]