
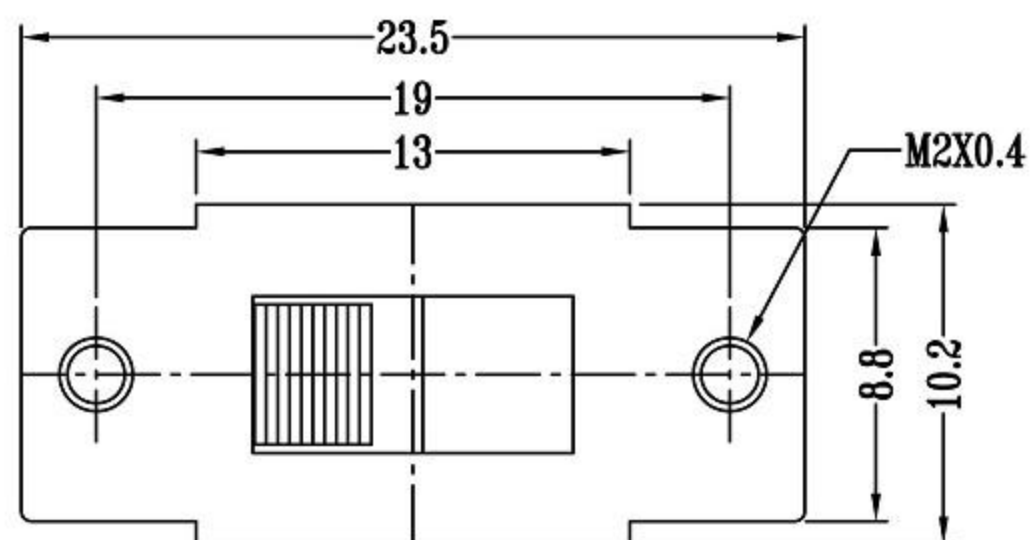
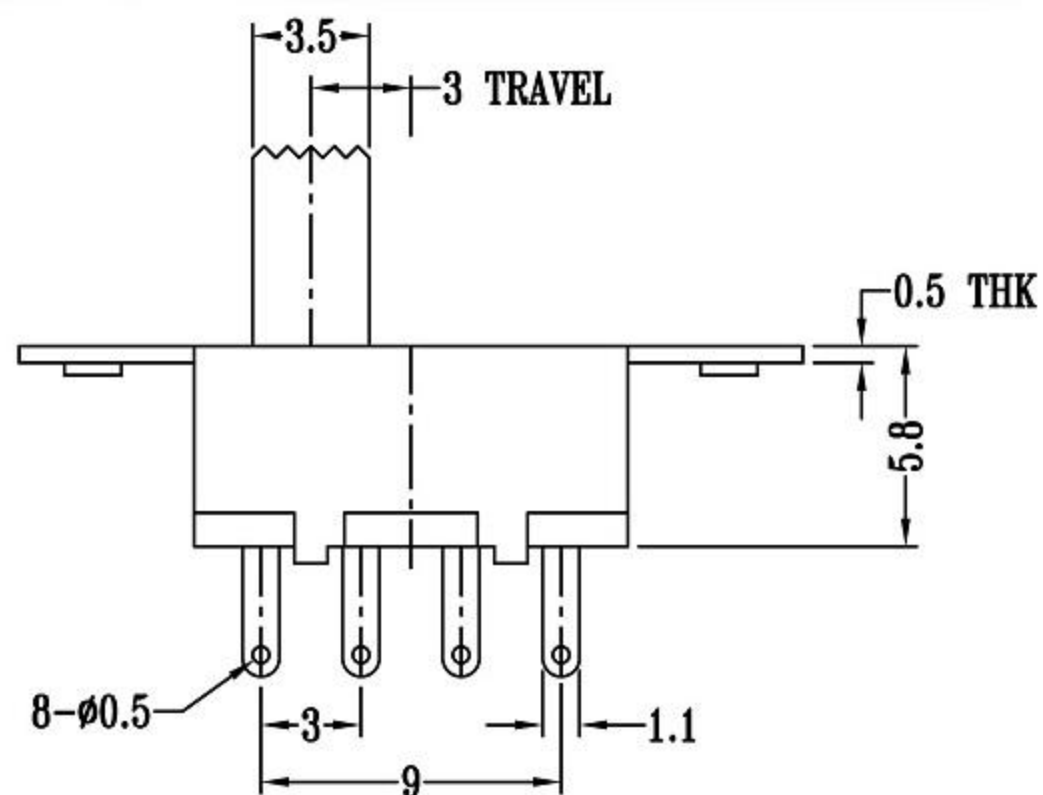
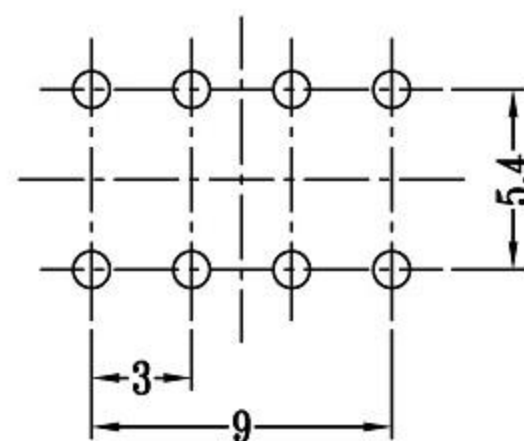
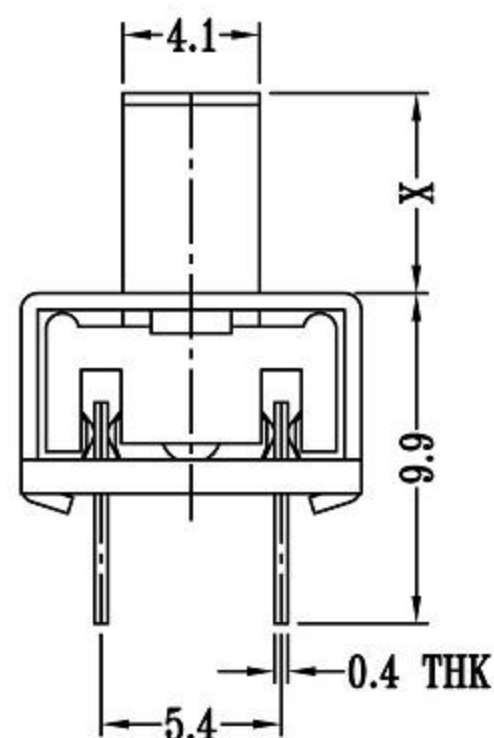


CAD FILE:

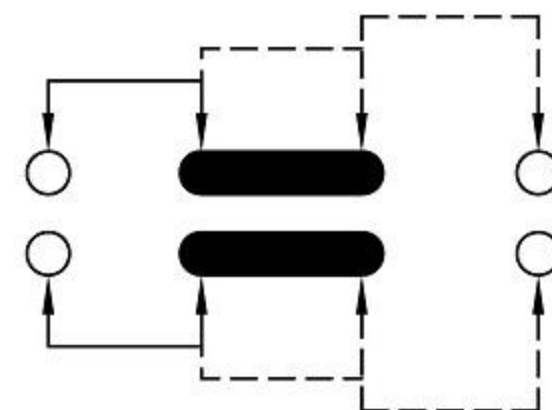

注: "*"表示关键尺寸(6个)

P.C.B LAYOUT
BOTTOM VIEW

SCHEMATIC (NON-SHORTING)

拨动开关立式技术参数:

1. 额定负荷: DC 30V 50V 0.3A 0.5A
2. 接触阻抗: $\leq 50\text{m}\Omega$
3. 绝缘阻抗: $\geq 100\text{m}\Omega$ DC500V
4. 耐焊温度: $250 \pm 5^\circ \text{C}$ 5s
5. 使用寿命: 10,000 cycles
6. 使用温度: -25°C to 80°C
7. 使用湿度: $\leq 85\% \text{ RH}$
8. 操作力: 160gf 256gf 300gf 可定制
9. 手柄长度: 2mm-10mm 可定制

8					TOLERANCE									
7	STEEL BALL	STEEL	1	NATURAL	UNLESS SPECIFIED									
6	SPRING	STEEL WIRE	1	NATURAL	WITHIN OVER		A	2012-10-26	初 版					
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED			ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.			
4	TERMINAL	BRASS STRIP	8	Ag PLATED	TITLE : VERTICAL SLIDE SWITCH			UNIT : mm		DRWG NO.:				
3	BASE	PHENOLIC RESIN	1	NATURAL	MODEL:			SCALE: 3:1						
2	FRAME	STEEL STRIP	1	Ni PLATED	东莞市高迪电子有限公司							DWN.		2012-10-26
1	KNOB	POM	1	BLACK								CHK'D		2012-10-26
NO.	PARTS	MATERIALS	Q'TY	FINISH								APPD.		