
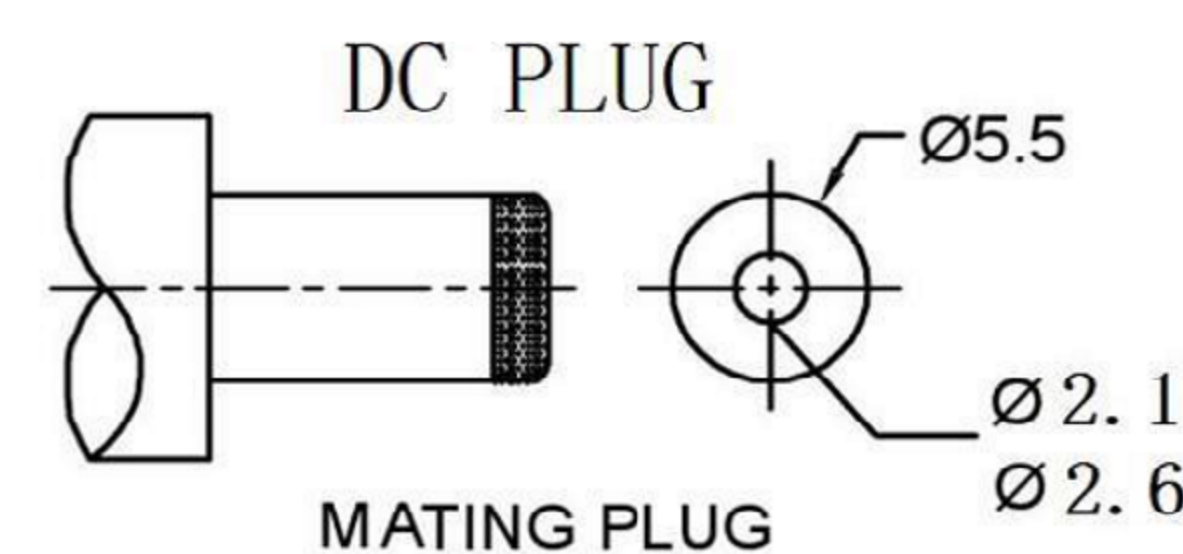
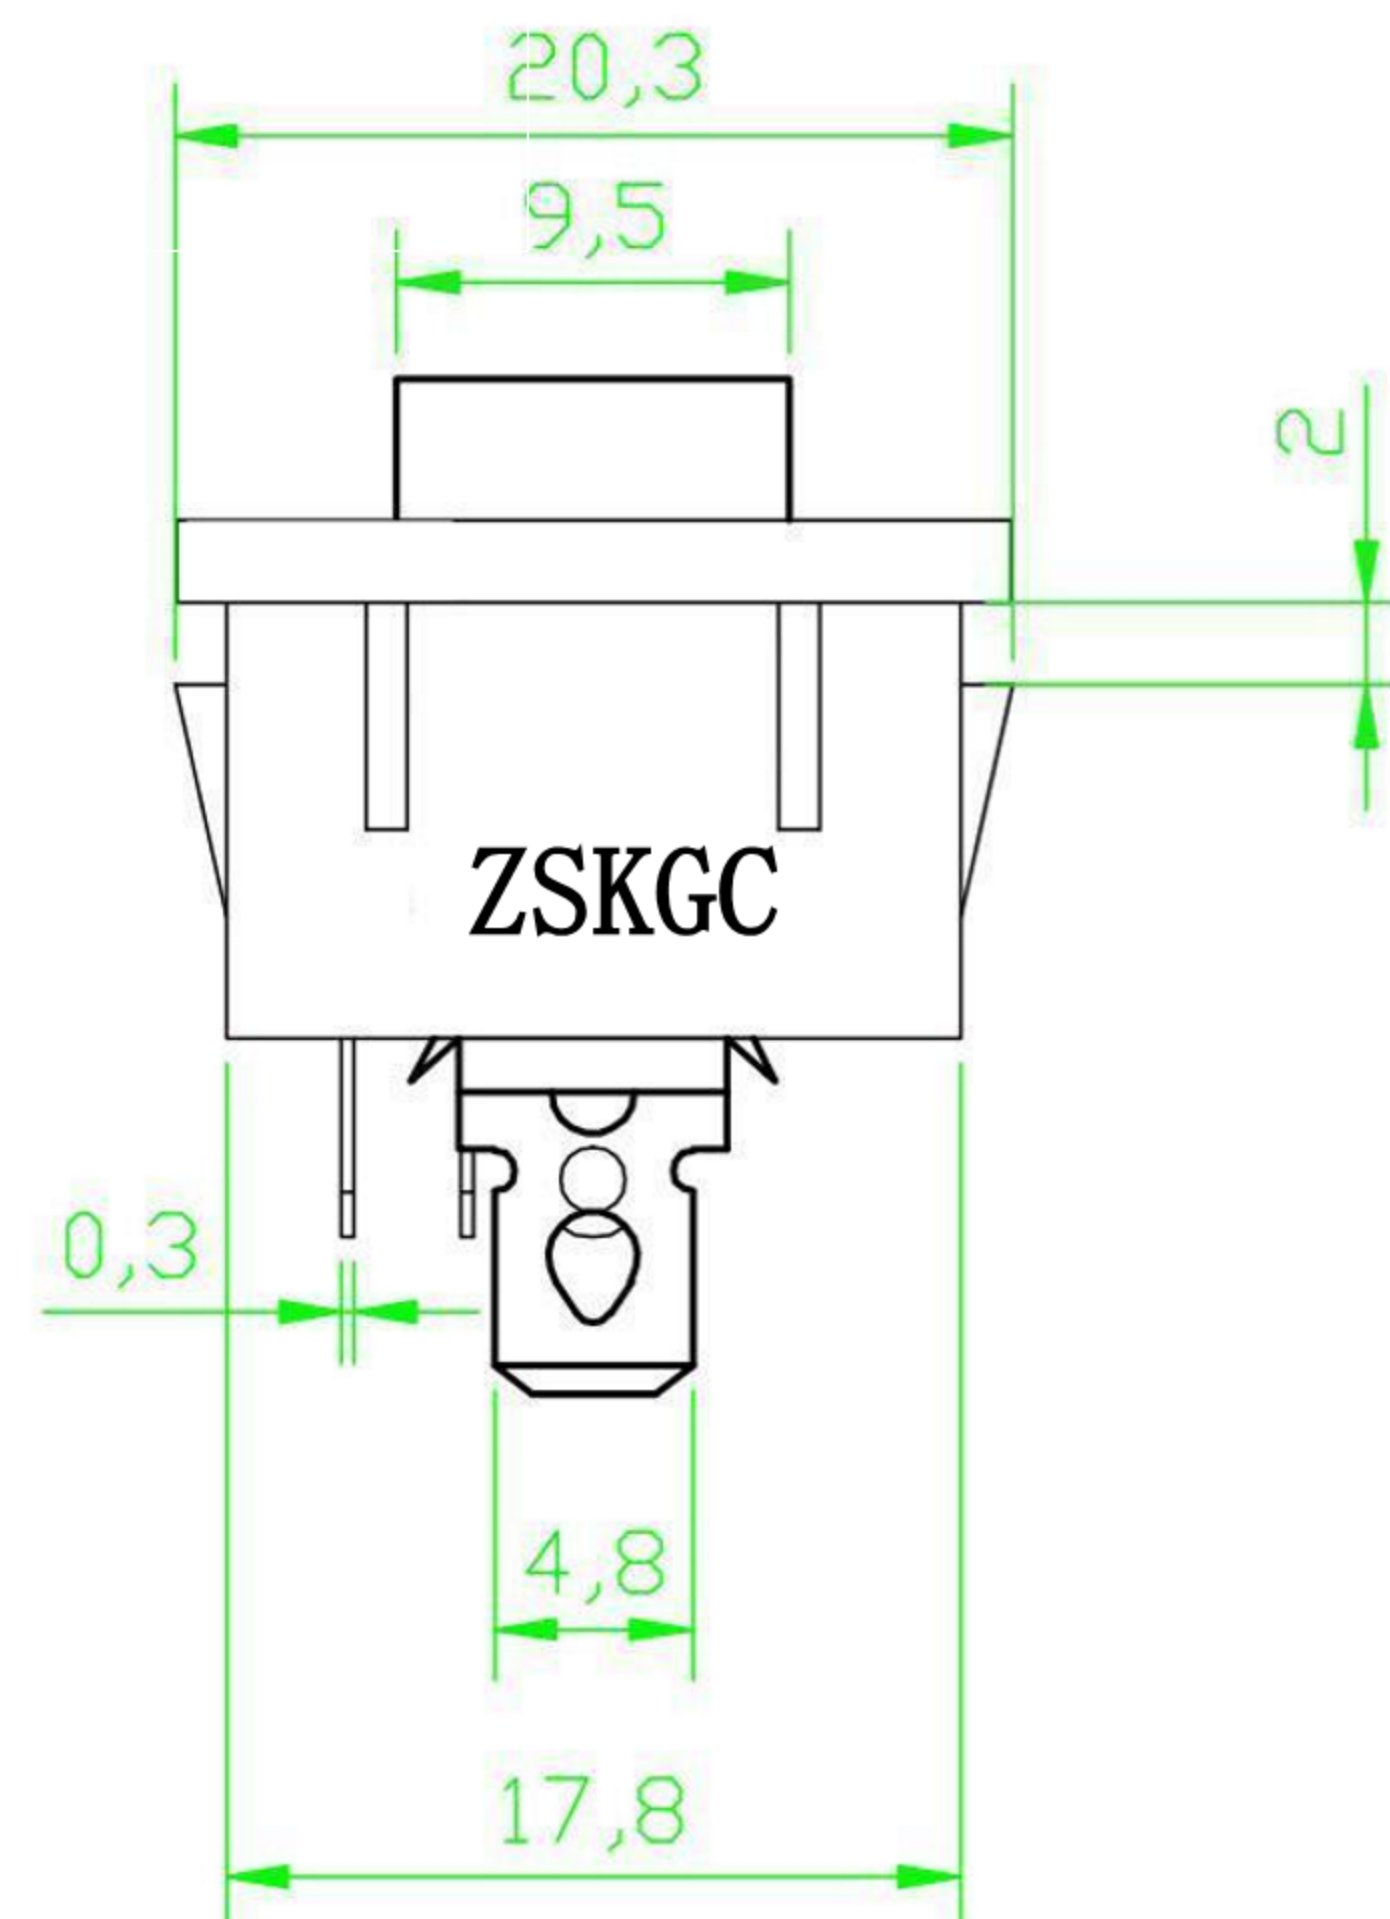
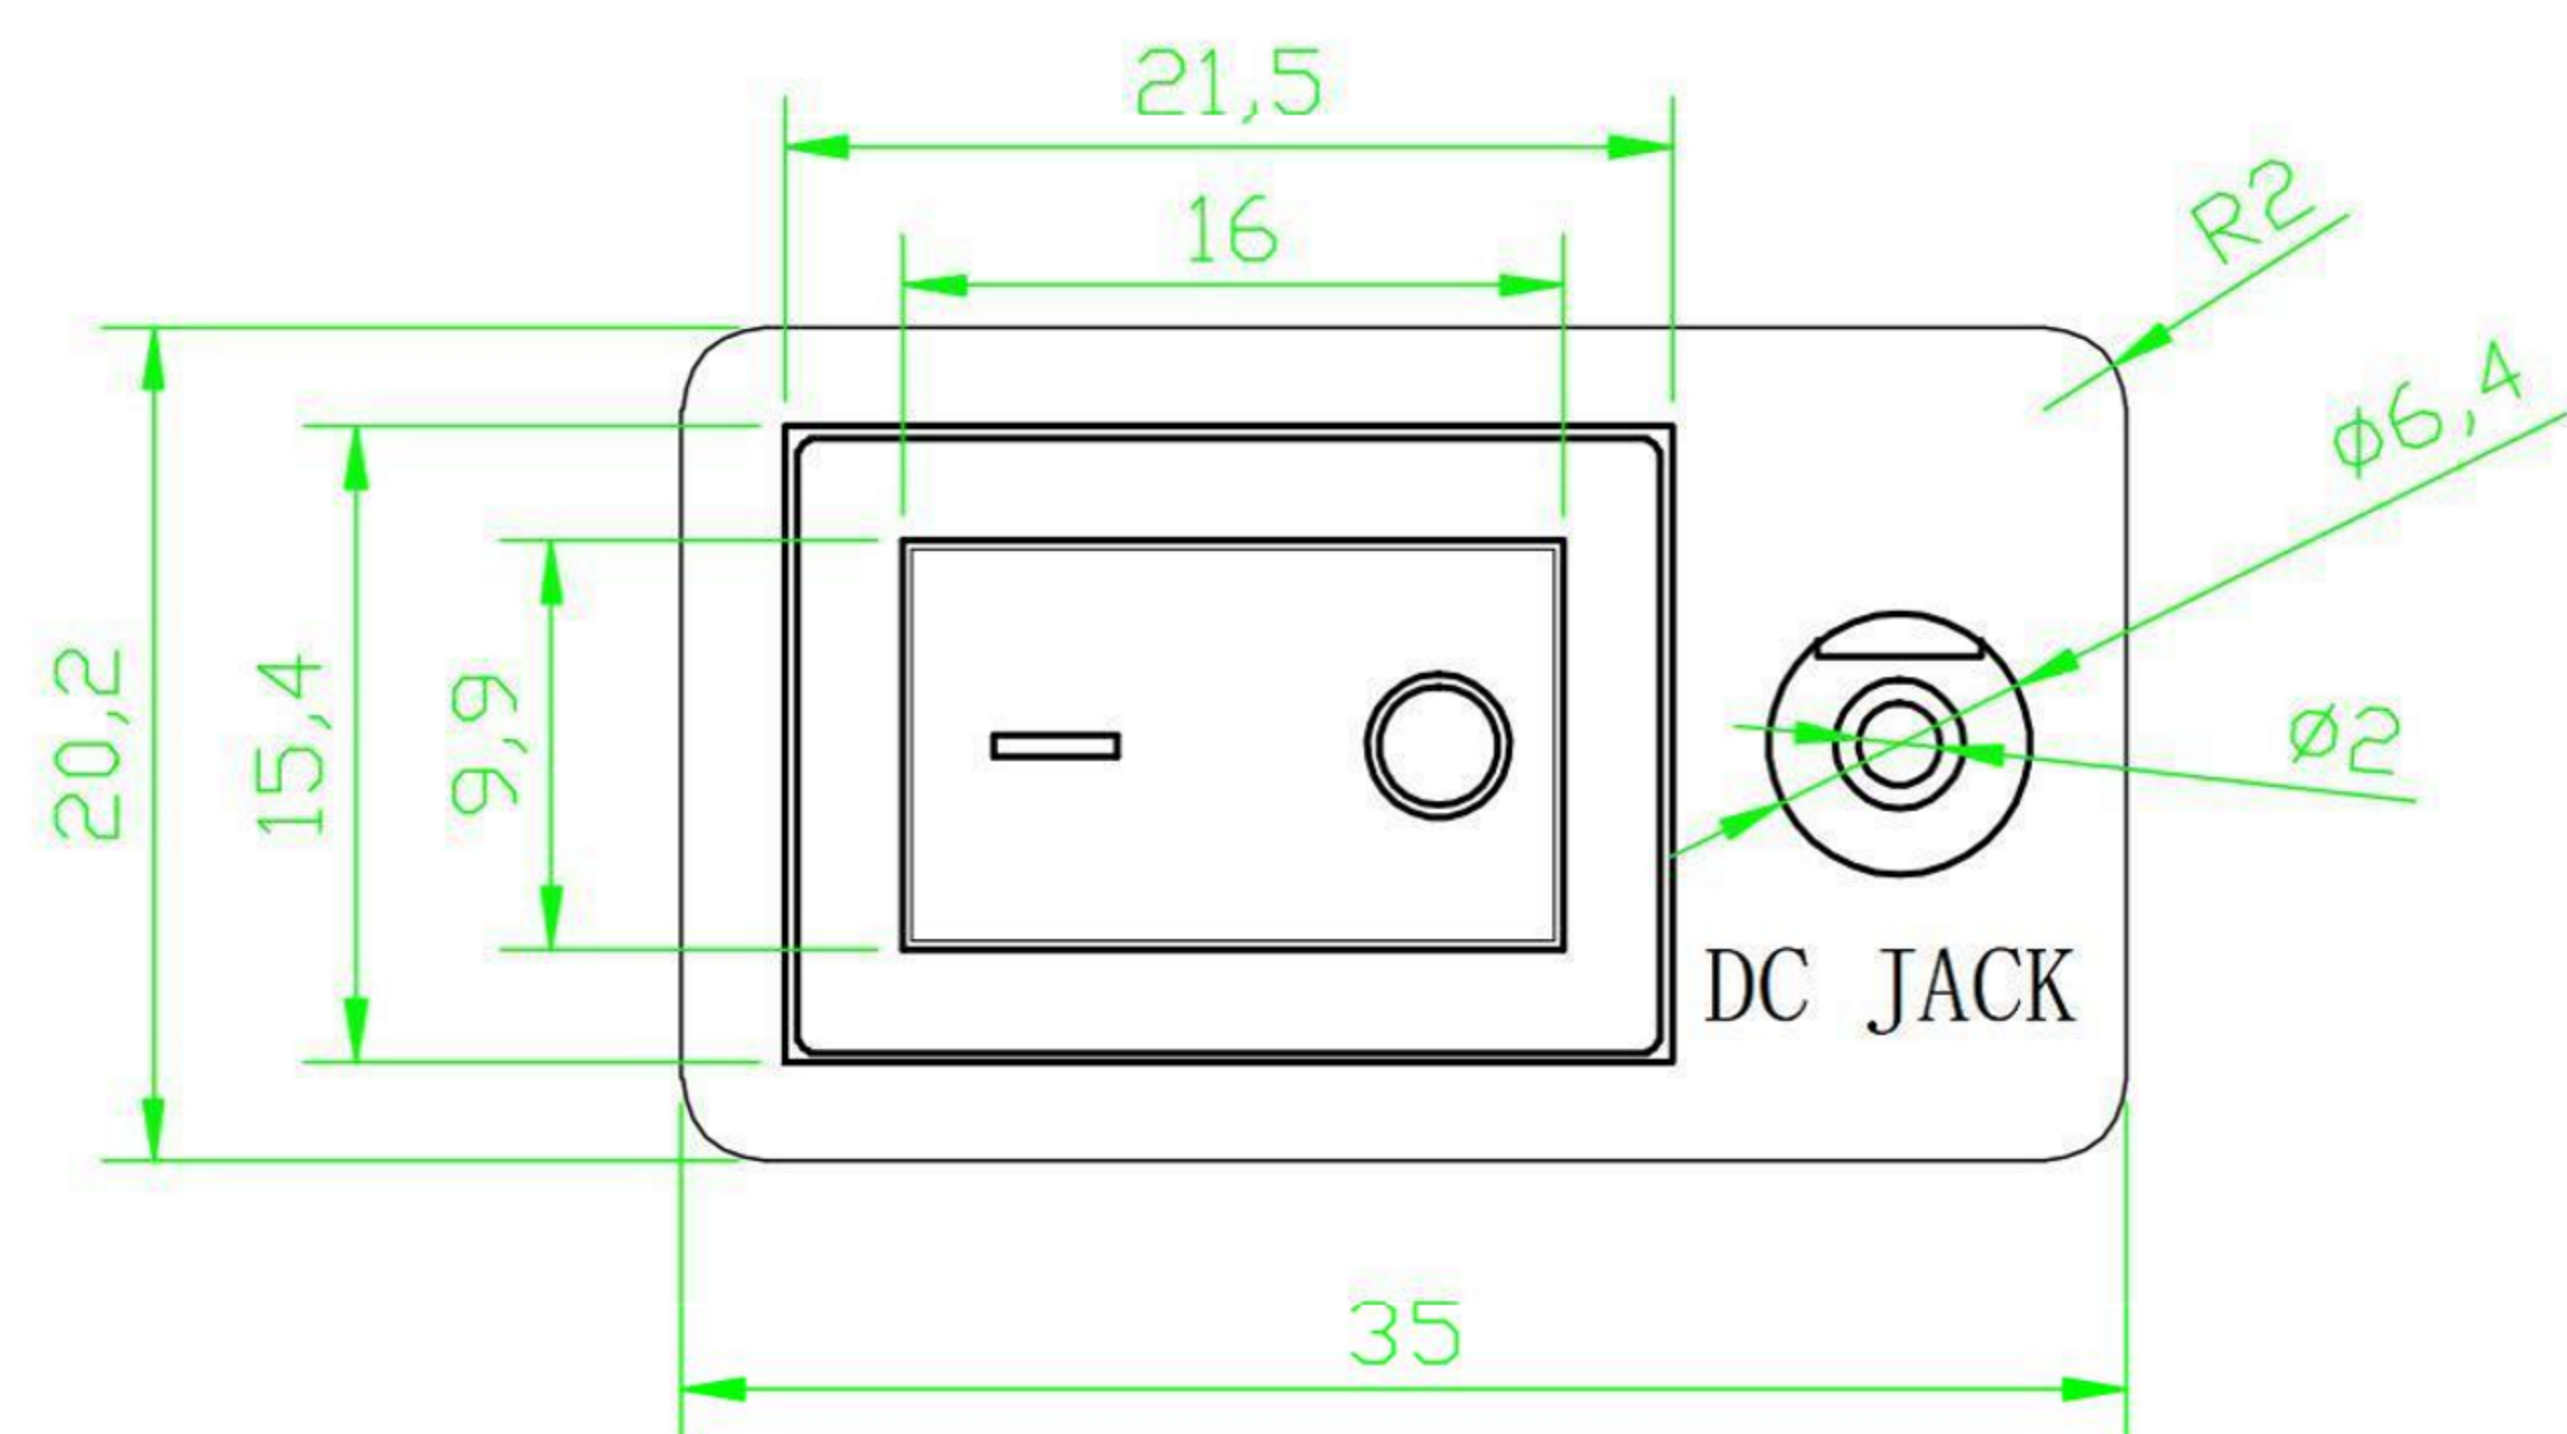


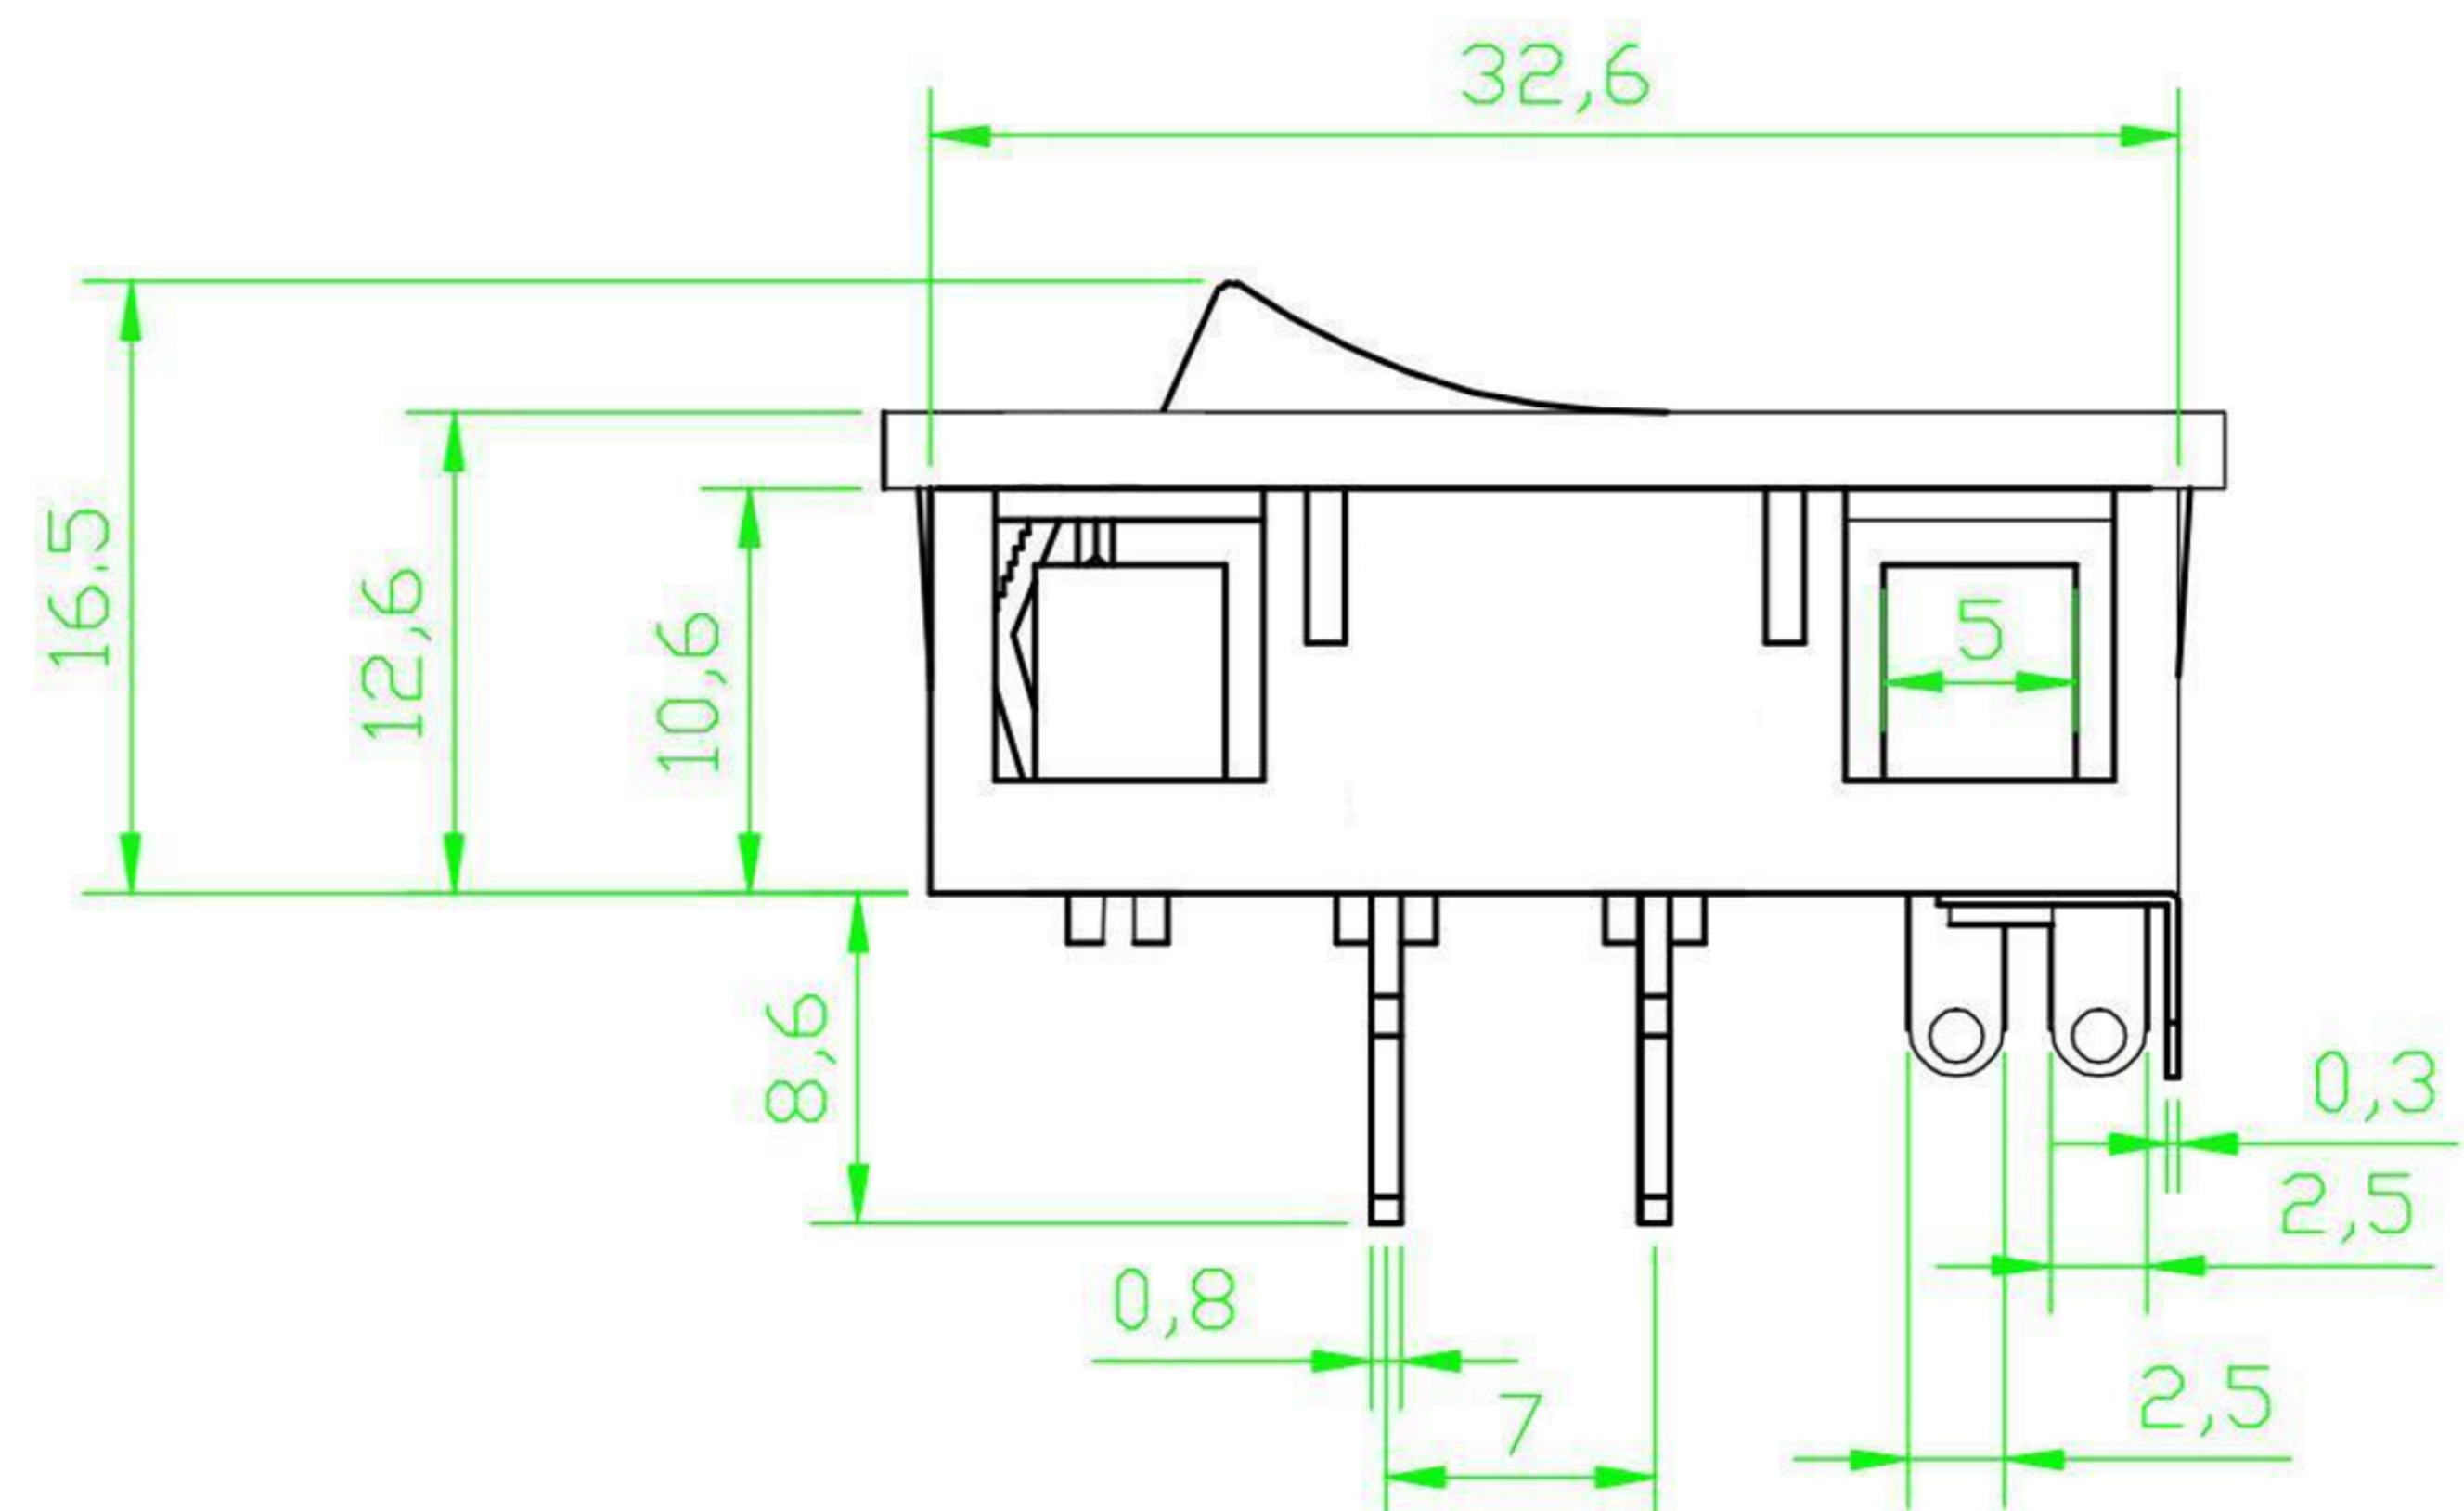


DC JACK SCHEMATIC	
	1 2 3
CENTER PIN	Ø2.0mm
	Ø2.5mm

安装孔

20,1

SWITCHING CIRCUIT

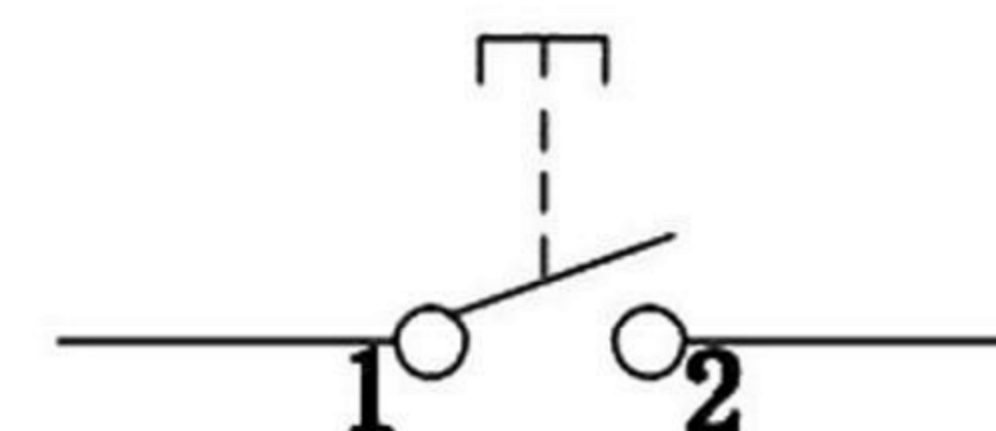

額定電源:6A ,30VDC

插針規格:2.0/2.5mm

插拔力:3-30N

插拔次數:5,000次

焊接型式:DIP




東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE
Ming Ming Zou 10/31/13

CHECKED BY: DATE
Ning Ning Su 10/31/13

APPROVED BY: DATE
Jia Xiang 10/31/13

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

SWITCH+JACK

AC POWER SOCKET

GD-RS-601-02

SIZE
A4
VER
R