

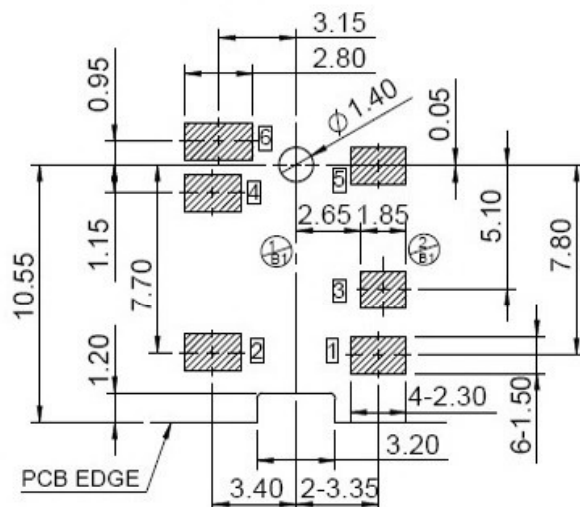
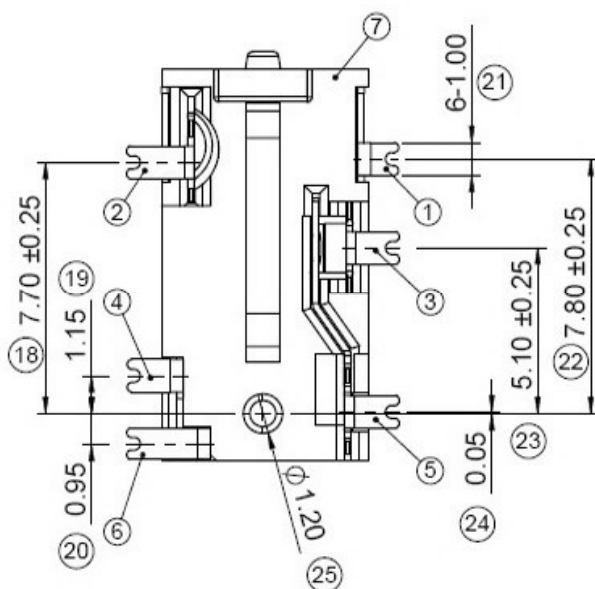
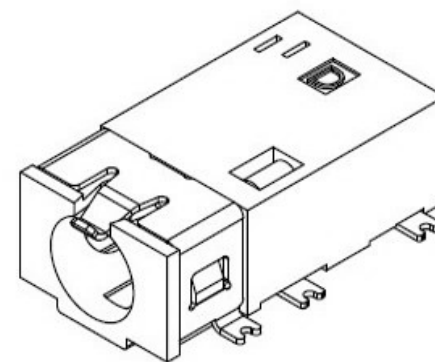
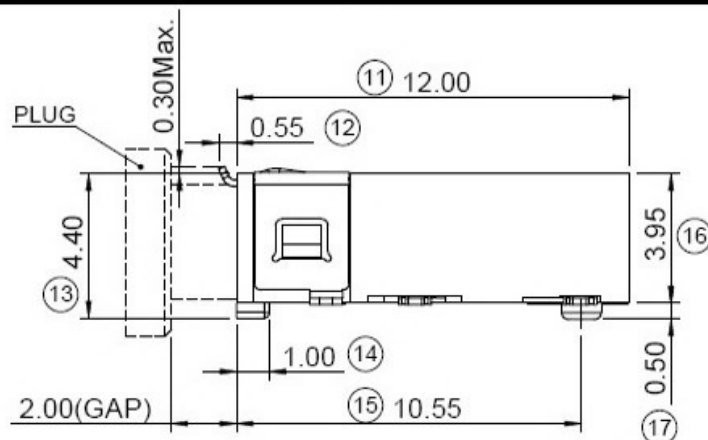


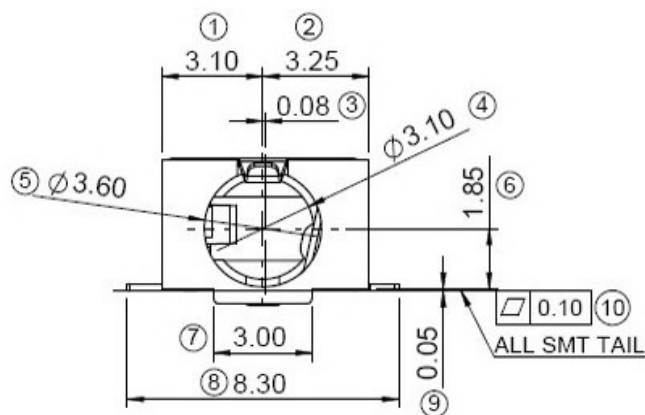

Note:


- 1.Contact Current Rating:12V 1A.
- 2.Contact Resistance:50mΩ MAX.
- 3.Insulation Resistnace:100MΩ Min.500V DC.
- 4.Dielectric Withstandeing:500V AC Min.
- 5.Durability:5000 Cycles Min.
- 6.Connector Mating Forces:29.4N(3.00Kgf) MAX.
- 7.Connector Unmating Forces:2.94N(0.30Kgf) Min.
- 8.The Product Machine With A GAP That:The Finished Machine With Socket Before/Up/Down/Left/Right Side Of 5,Protection GAP First Proposed,The Desing OF 0.15mm.

RECOMMENDED PCB LAYOUT(TOP VIEW)
(GENERAL TOLERANCE ±0.05)

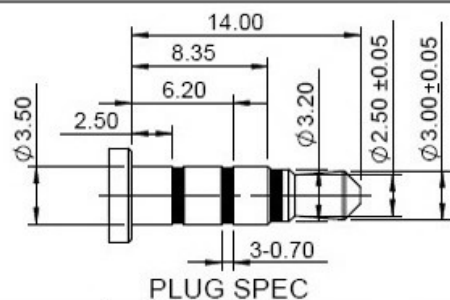


PLUG SPEC

SCHEMATIC



AFTER INSERT SCHEMATIC

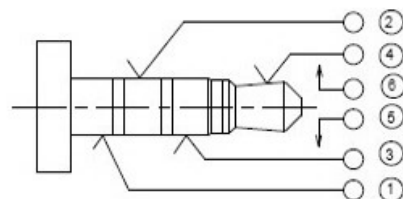

7	HOUSING	HIGH TEMP	BLACK	
6	TERMINAL 6	COPPER ALLOY	————	Au PLATED
5	TERMINAL 5	COPPER ALLOY	————	Au PLATED
4	TERMINAL 4	COPPER ALLOY	————	Au PLATED
3	TERMINAL 3	COPPER ALLOY	————	Au PLATED
2	TERMINAL 2	COPPER ALLOY	————	Au PLATED
1	TERMINAL 1	COPPER ALLOY	————	Au PLATED
NO.	DESCRIPTION	MAT,L	COLOR	REMARK

CUSTOMER
COPY

高迪电子有限公司

TITLE:

φ3.50 mm PHONE JACK CONNECTOR

B1	03/04/'14	变更PCB板3#脚PAD尺寸	谭维心	张学春
B	11/19/'12	B1:1号脚端子设变结构	梁碧华	罗志兵
A	09/25/'12	新版发行	——	——
REV	DATE	DESCRIPTION	CHANGE	APPRO

Angle	±2°
X	±0.35
.X	±0.25
.XX	±0.20
GENERAL TOLERANCE UNLESS OTHERWISE NOTED	

DESIGN	谭维心	03/04/'14
CHECK	张学春	03/04/'14
APPRO.	张学春	03/04/'14

PART NO.	
PRODUCT SPEC.	
C ING	FILE NAME.
SCALE	4:1
UNIT:mm	A4
SHEET: 1 of 2	