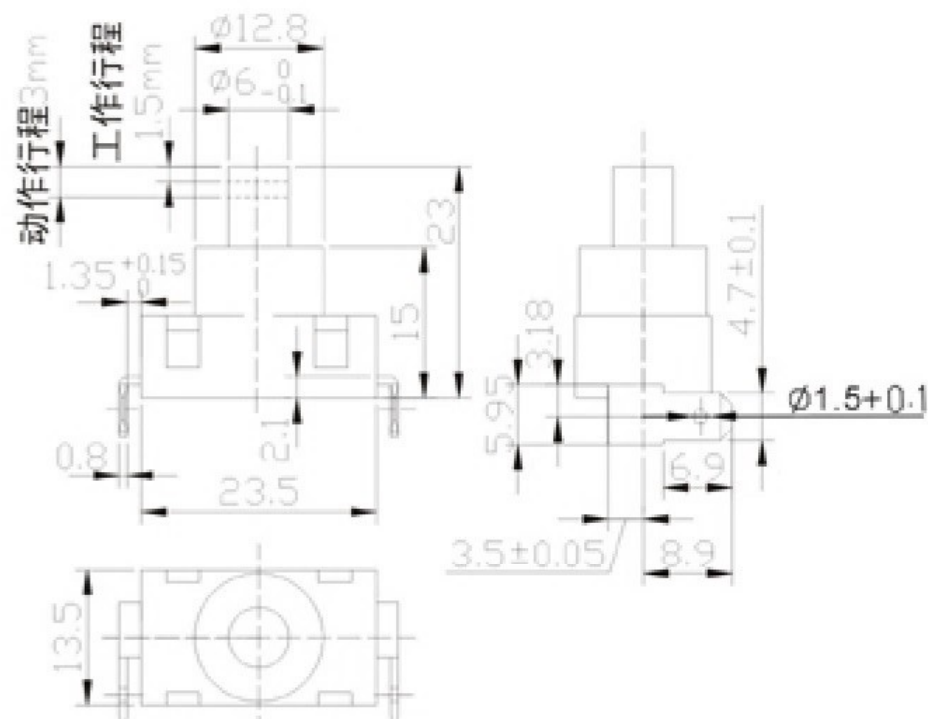



$$\begin{array}{c} | \\ \hline \bigcirc \quad \bigcirc \end{array}$$

电源参数: 12 (10)A 250V AC; 7 (7)A 250V AC; 8A 250V AC;
16A 125V AC; 18A 125V AC
接触电阻: $\leq 50 \text{ m}\Omega$
绝缘电阻: $\geq 100 \text{ M}\Omega$
介电强度: 极与极1500VAC, 极与壳3000VAC
环境温度: T105
电气寿命: 1E4

8					TOLERANCE						
7					UNLESS SPECIFIED						
6					WITHIN 1.5mm : ±0.1mm		A	2012-8-13	初 版		
5	SPRING	SUS	1	NATURAL	OVER 1.5mm : ±0.2mm		ISSUE	DATE	DESCRIPTIONS OF REVISION		
4	CAM STICK	SUS	1	NATURAL	TITLE : VERTICAL PUSH SWITCH				UNIT : mm	DRWG NO.:	
3	CASE	PA66/BRASS STRIP	1	GREY/Ag PLATED	MODEL:				SCALE: 5:1	DWN.	2012-8-13
2	COVER	PA66	1	BLACK	东莞市高迪电子有限公司				CHK'D		2012-8-13
1	KNOB	PA66/PBS C5210R-EH	1	WHITE/Ag CLAD					APPD.		
NO.	PARTS	MATERIALS	Q'TY								