
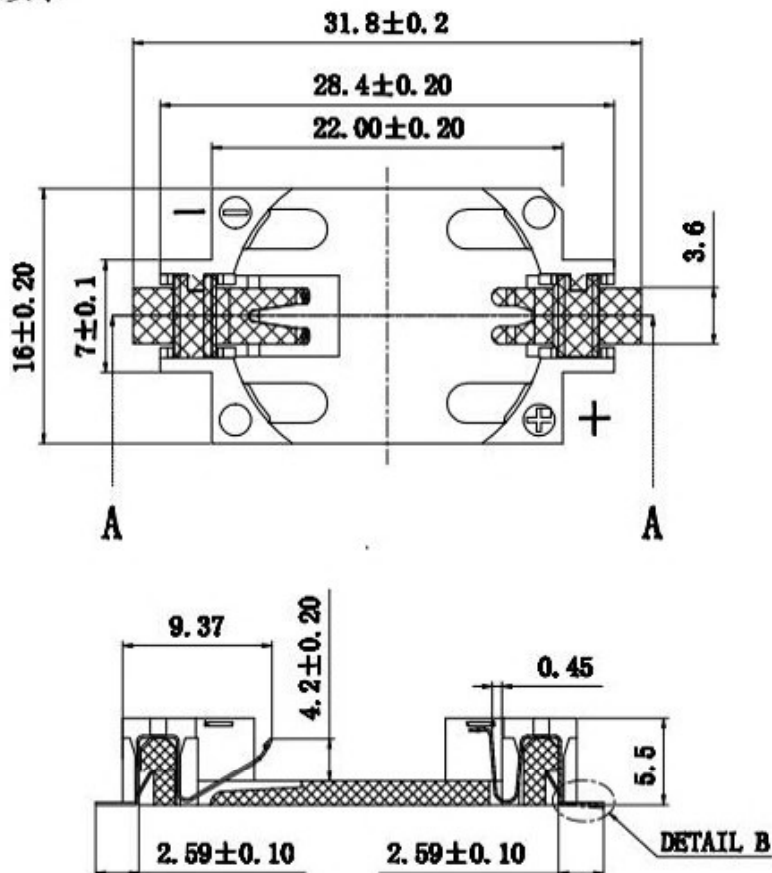
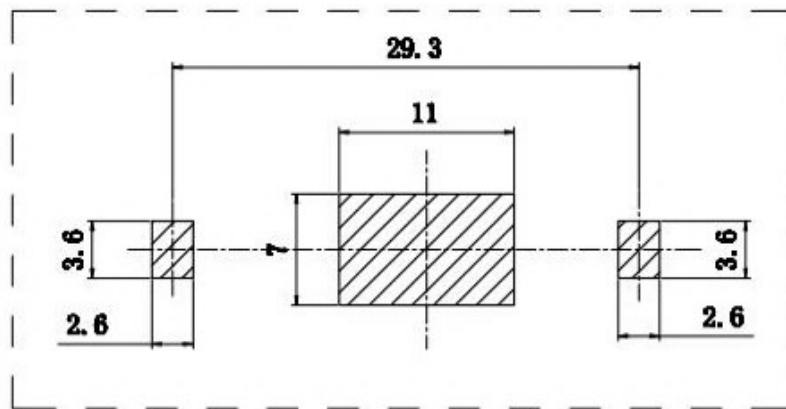


## CUSTOMER DRAWING

所有物质均符合环保要求

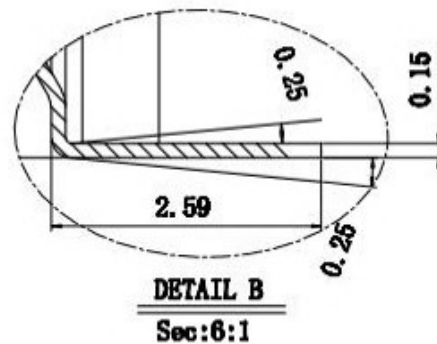

SECTION: A-A

PCB Layout Diagram  
Top View

## NOTE:

## 1. MATERIAL:

a. HOUSING: THERMOPLASTIC GLASS FIBRE UL94V-0 【塑胶材质】PPA料 (耐温240°-260°)

b. CONTACT: BRASS

【五金材质】磷青铜

## 2. ELECTRIC:

a. CONTACT RESISTANCE: 30 MILLIOHMS MAX

【电镀处理方式】Au1 μ"

b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN

【适用范围】医疗设备、数码玩具、工控主板、消防等

c. DIELECTRIC VOLTAGE: 750V AC ONE SEC LEVEL

【装箱规格】100只x25层=2500只 (吸塑包装)

d. OPERATING TEMPERATURE: -55 ~C° +85 ~C°

2500只x2捆=5000只每箱

注: △为重点管控尺寸

| ③   | SPRING    | 1   | STAINLESS STEEL | Ni PLATED   |        |
|-----|-----------|-----|-----------------|-------------|--------|
| ②   | TERMINAL  | 1   | COPPER ALLOY    | Au PLATED   |        |
| ①   | Housing   | 1   | HIGH TEMP       | Black       |        |
| NO. | PART NAME | QTY | MATERIAL        | DESCRIPTION | REMARK |

UNLESS OTHERWISE,  
GENERAL TOLERANCE:X.xxx ±0.10  
X.xx ±0.20  
X.x ±0.30  
X. ±0.38

ANGULAR:

X.xx ±1°  
X.x ±3°  
X. ±5°

东莞市高迪电子有限公司

TITLE: 电池座卧式

客户图

P/N:

MODEL:

DRAW NO.:

THIRD ANGLE PROJECTION

mm

UNIT:

SCALE:

1:1

SIZE:

A4

SHEET:

1/1

| JH2016-061 | E    | 修改图面与实物相符   | 2016.05.31 | Bin    | DESIGN   | 陈少兵 | 2016.05.31 |
|------------|------|-------------|------------|--------|----------|-----|------------|
|            | D    | 更新图面        | 2015.09.23 | 陈少兵    | CHECK    | 郑小伟 | 2016.05.31 |
|            | C    | 调整尺寸公差      | 2013.07.04 | 陈少兵    | APPROVAL | 吕海清 | 2016.05.31 |
| ECN NO.    | REV. | DESCRIPTION | DATE       | CHANGE |          |     |            |