


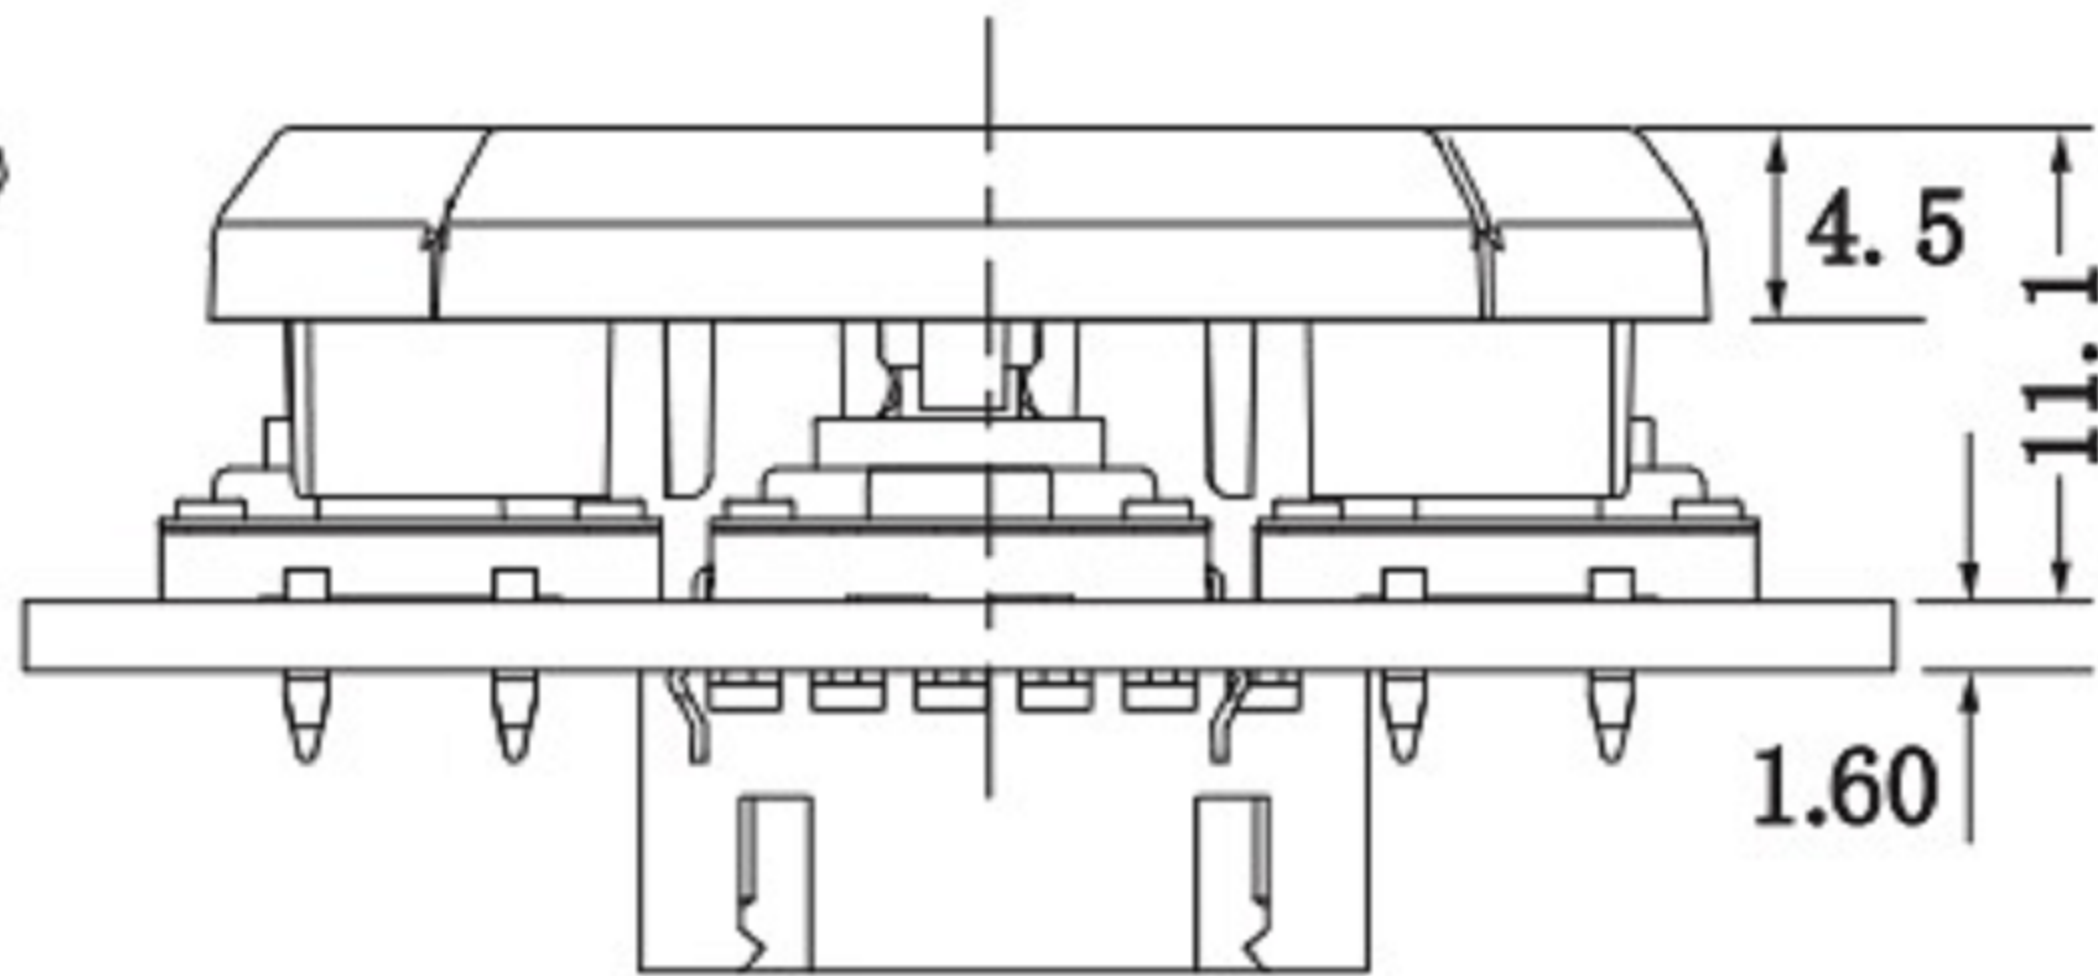
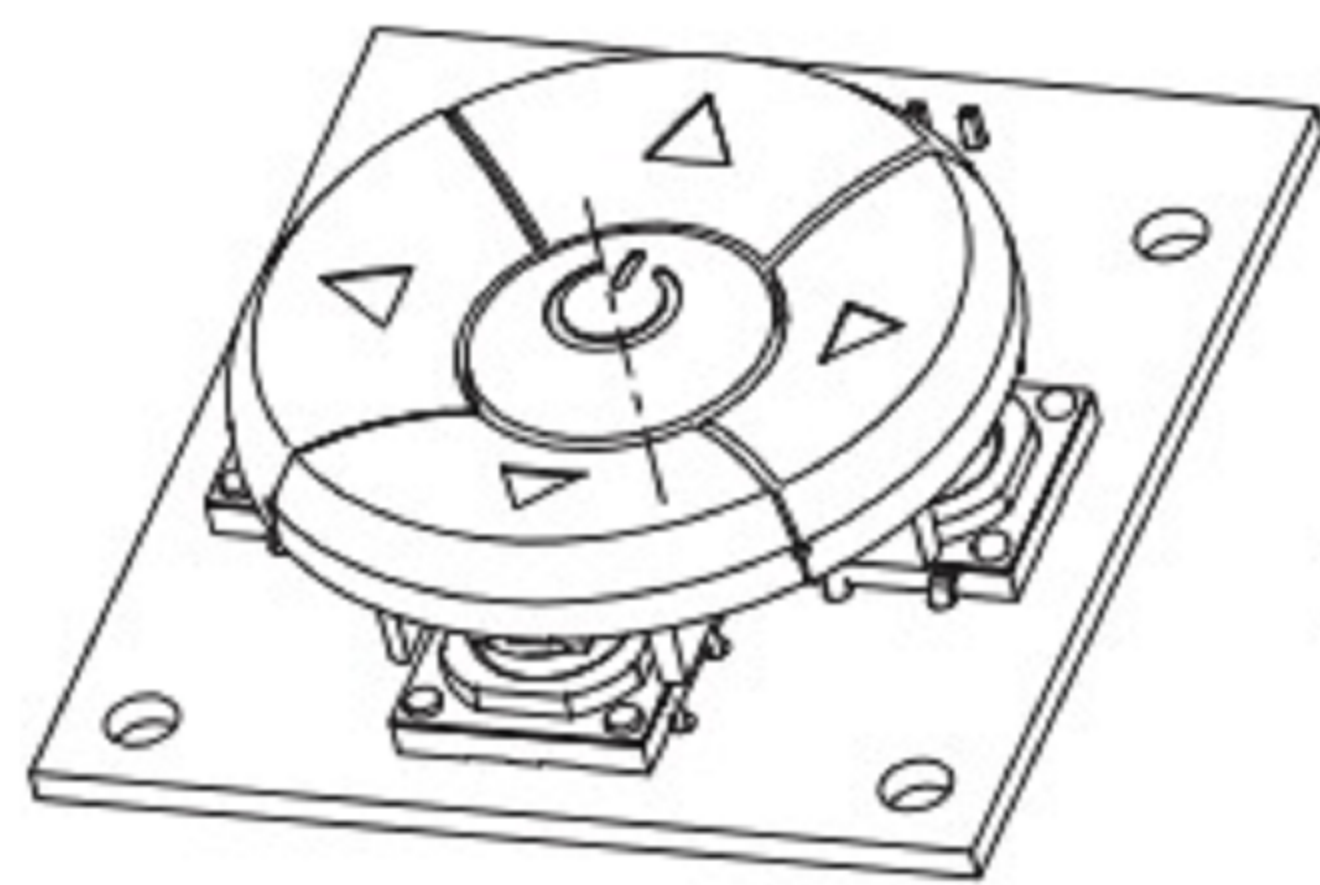


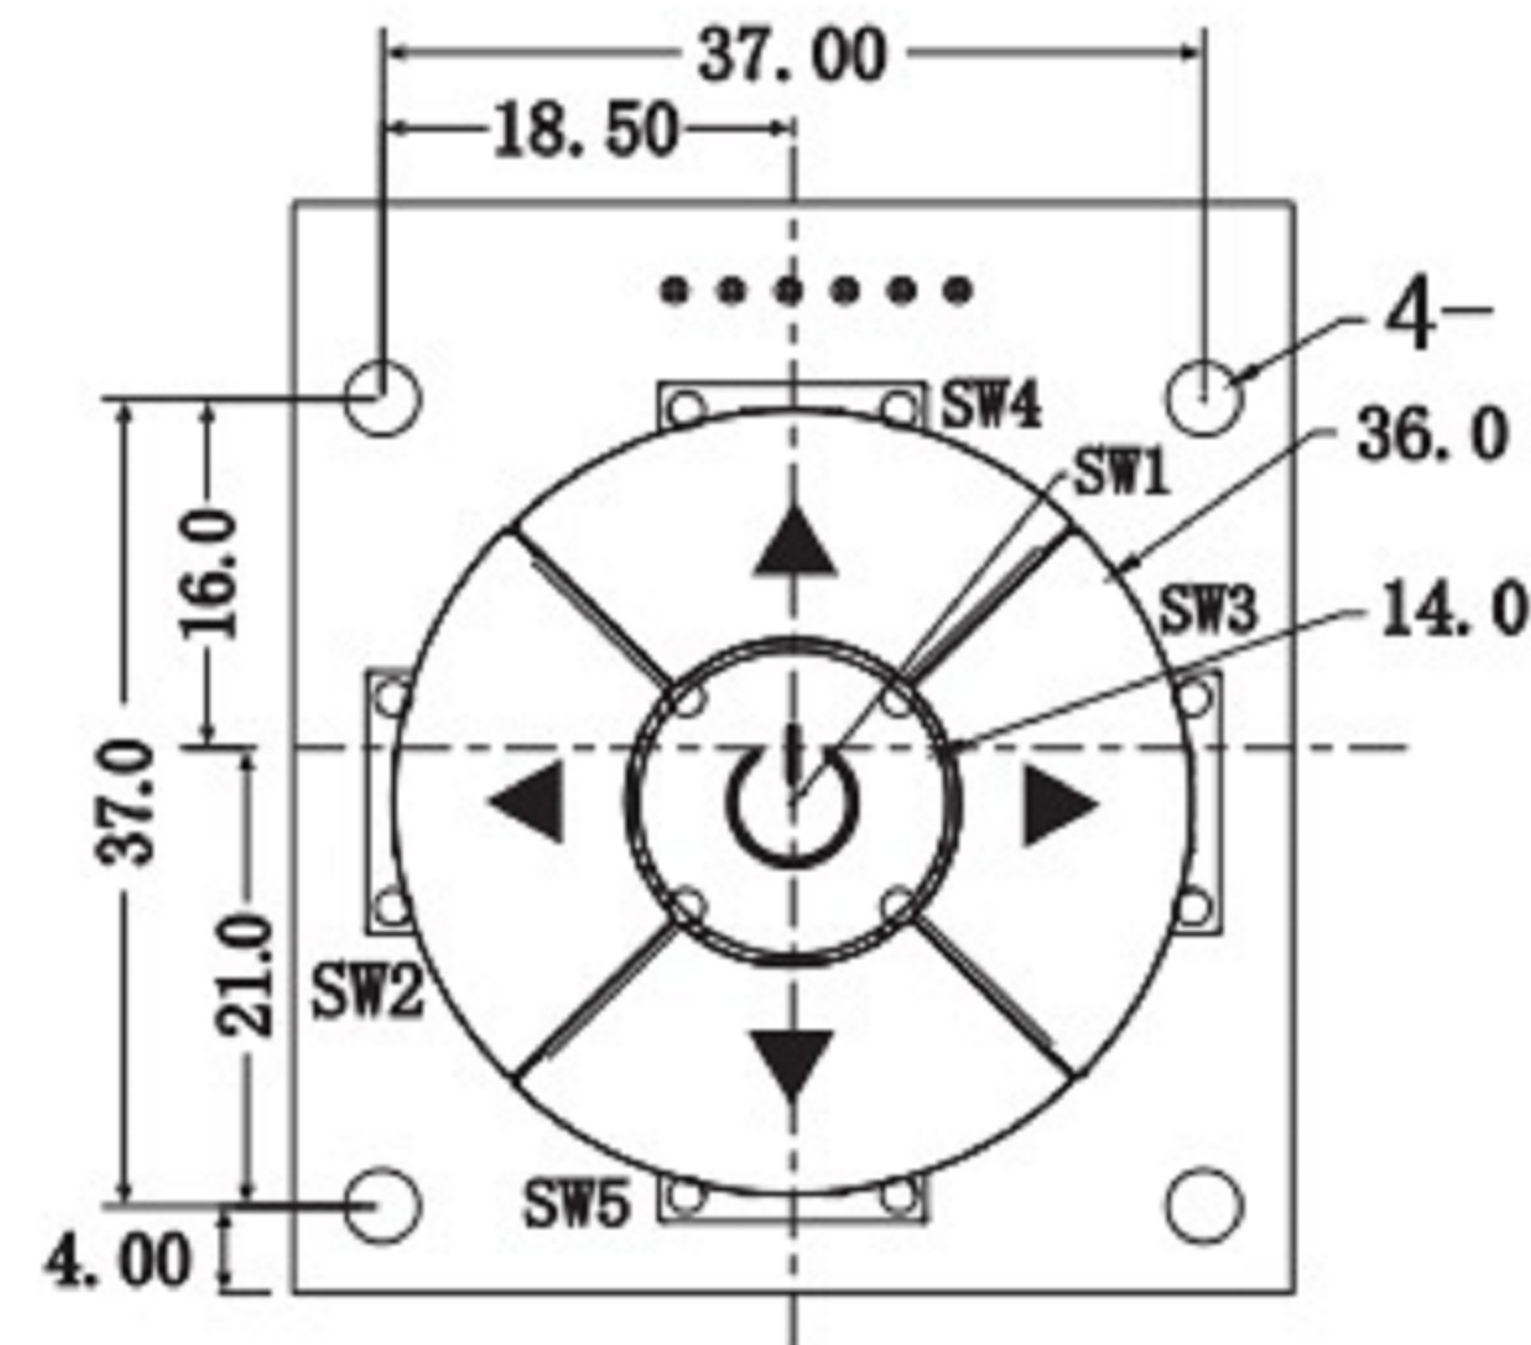

PCB LAYOUT

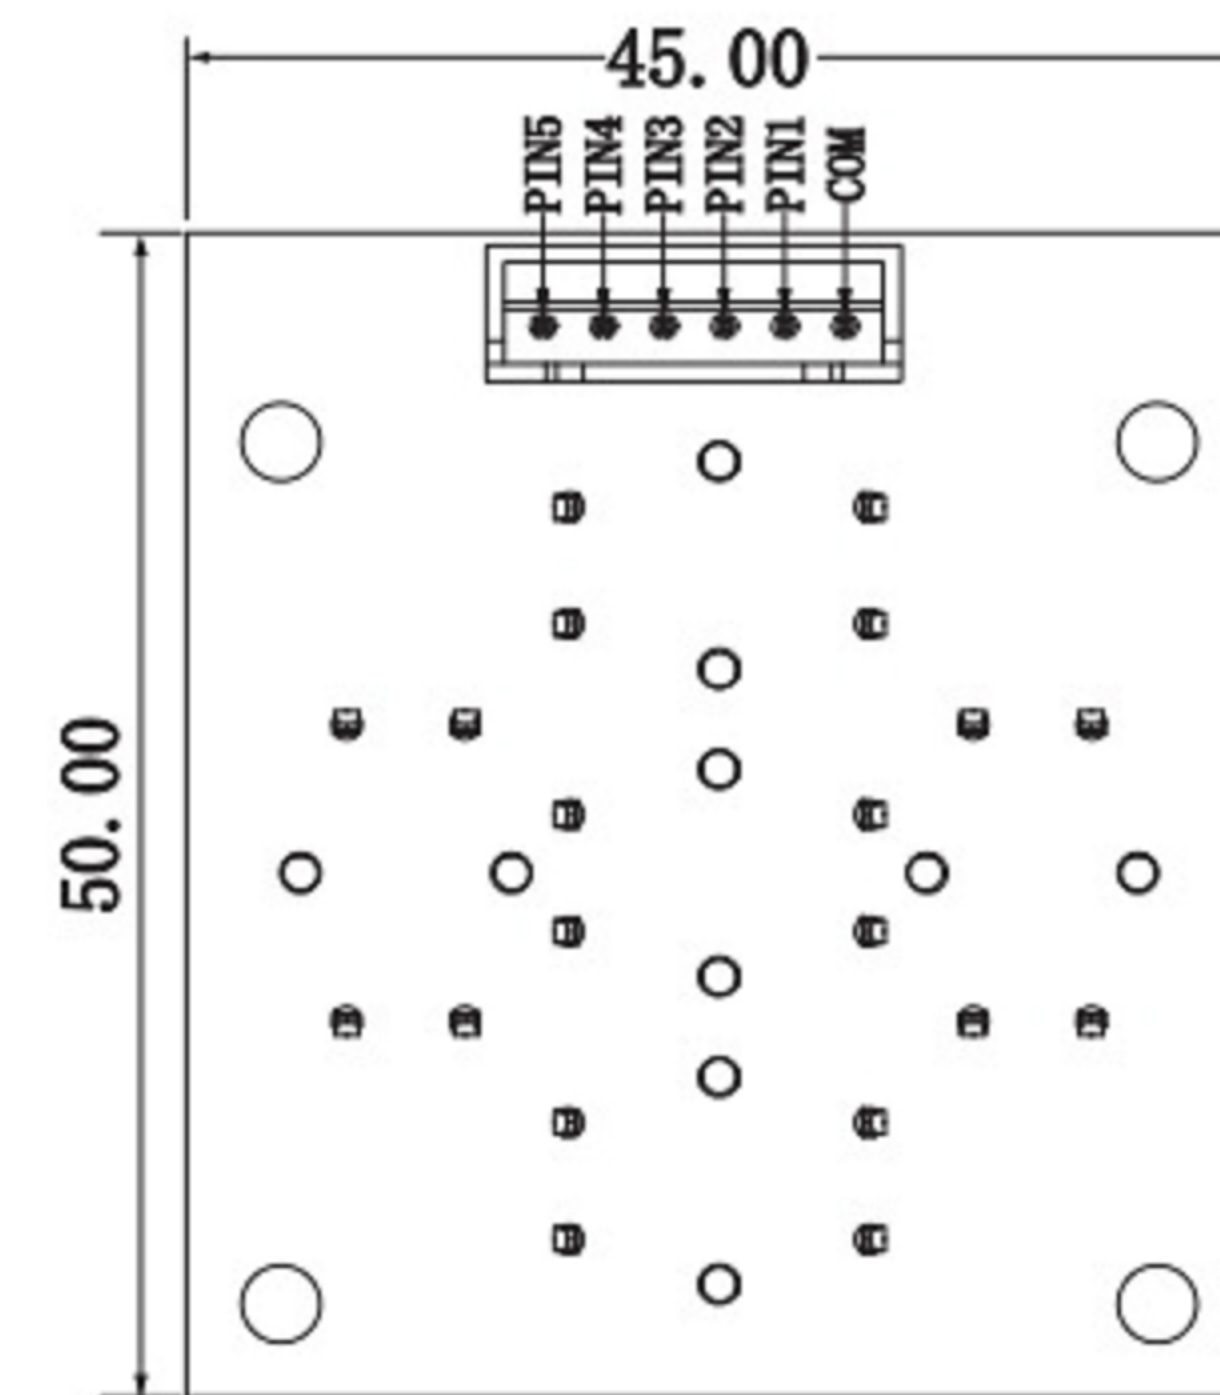

SCHEMATIC

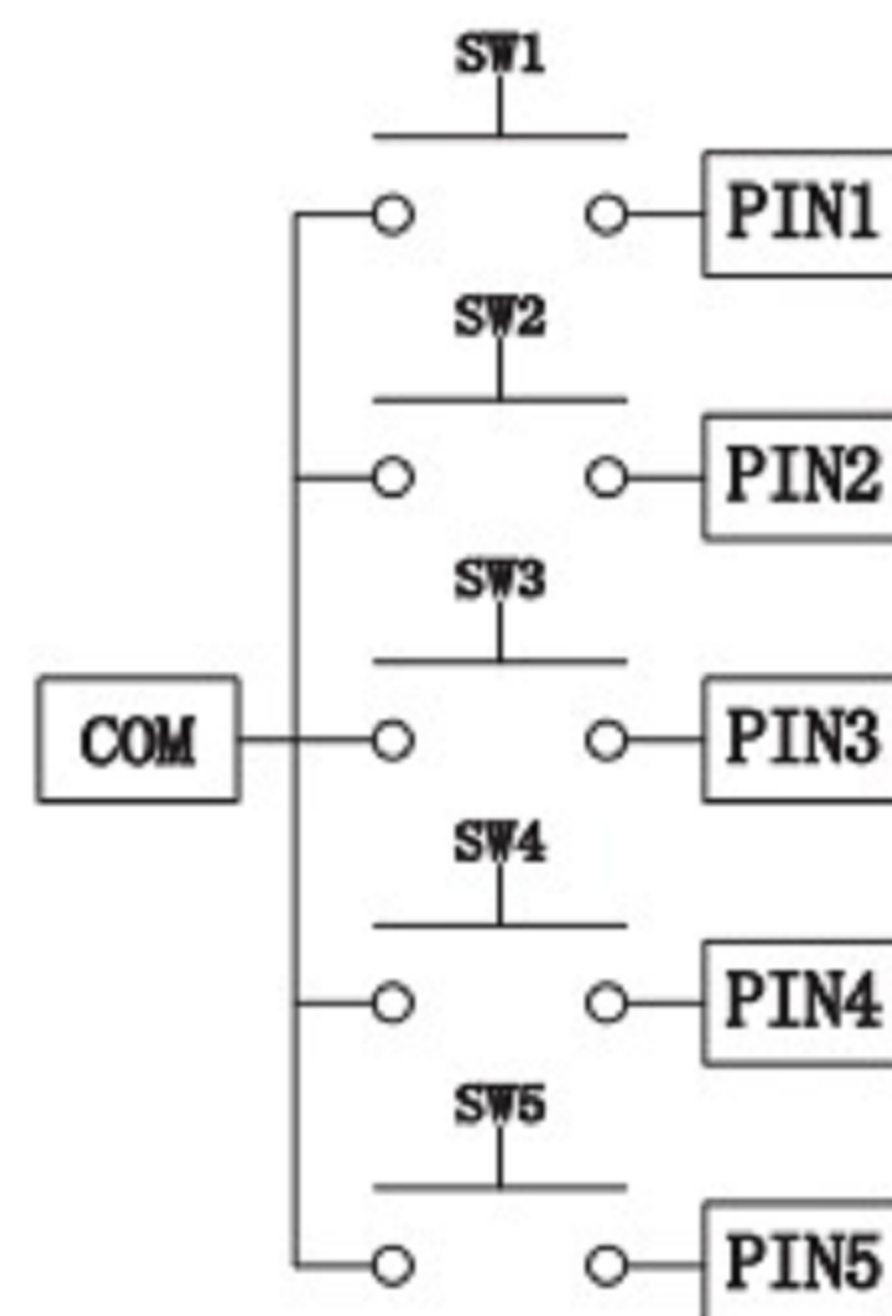

SPECIFICATIONS:

Climate grade:-30°C~70°C
Rated values:0.5A/12V
Contact resistance:≤50mΩ
Dielectric strength:250V.AC.1Min
Insulation resistance:≥100MΩ
Operating force:250±30gf
Travel:0.30±0.02
Life:5,000,000cycles-10,000,000cycles

NO.	PART NAME	QTY	MATERIAL	SPECIAL DEAL
1	BRACKET	1	LCP	WHITE
2	BASE FRAME	1	LCP	WHITE
	TERMINAL	1	PHOSPHOR BRONZE	SILVER PLATING
3	SPRING PLATE	1	STAINLESS STEEL	SILVER PLATING
4	ACTUATOR	1	PA6T	WHITE
5	FRAME	1	STAINLESS STEEL	TIN PLATING
	L&D	1		




东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE
Ming Ming Zou 11/19/14

CHECKED BY: DATE
Ning Ning Su 11/19/14

APPROVED BY: DATE
Jia Xiang 11/19/14

MAT'L		TITLE	SWITCH
FINISH		MODLE	TACT SWITCH
SCALE	1 : 1	DWG NO.	GD-TS-10-T
SHEET NO.	1 of 1	PART NO.	

SIZE
A4
VER
R2