

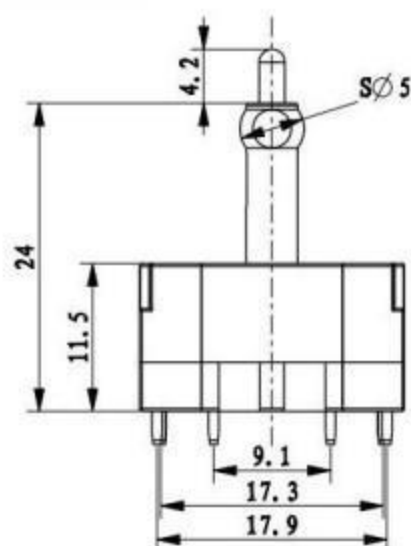
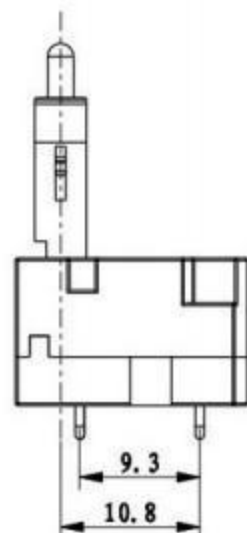



CIRCUIT

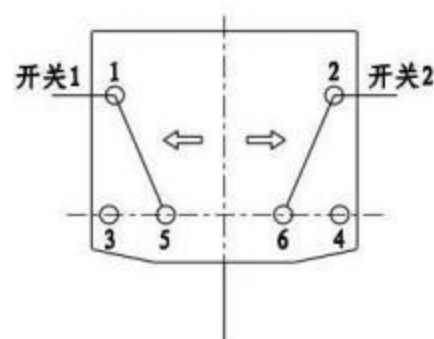

P. C. B LAYOUT

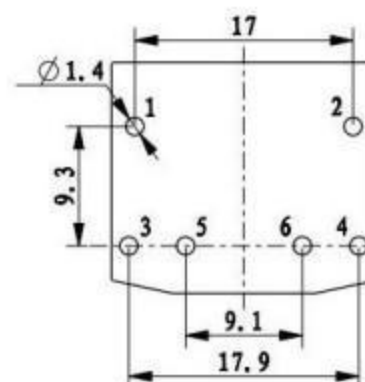

技术参数

轴方向数: 两向
额定电压: DC 12V
额定电流: 15A
初期接触阻值: 50mΩ
绝缘阻抗: 100MΩ
耐电压: AC 300V 1分钟
开关动作力: 600±150gf
开关全行程: 2.0±0.2mm
接触行程: 1.6±0.3mm
轴向间隙: 0.4mm
按压寿命: 25000次

E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CONTACT	2	SUS	Ag plated
C	COVER	1	SUS	Ag plated
B	CASE	1	LCP	Black
A	Knob	1	PA46	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

07/30/13

MAT'L

TITLE

SWITCH

CHECKED BY:

Jacky Chen

DATE

07/30/13

FINISH

MODLE

Multi Function SWITCH

APPROVED BY:

Tony Kao

DATE

07/30/13

SCALE

1 : 1

DWG NO.

SHEET NO.

1 of 1

PART NO.

SIZE

A4

VER

R1