


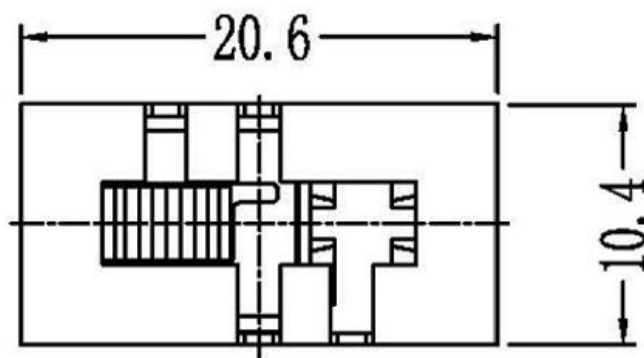
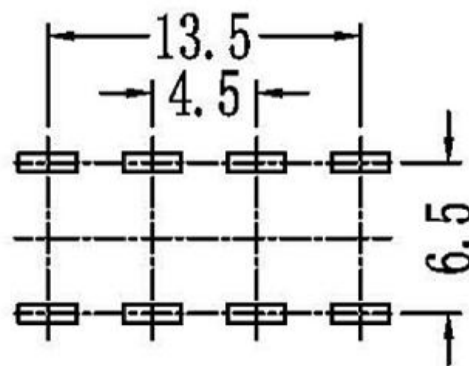


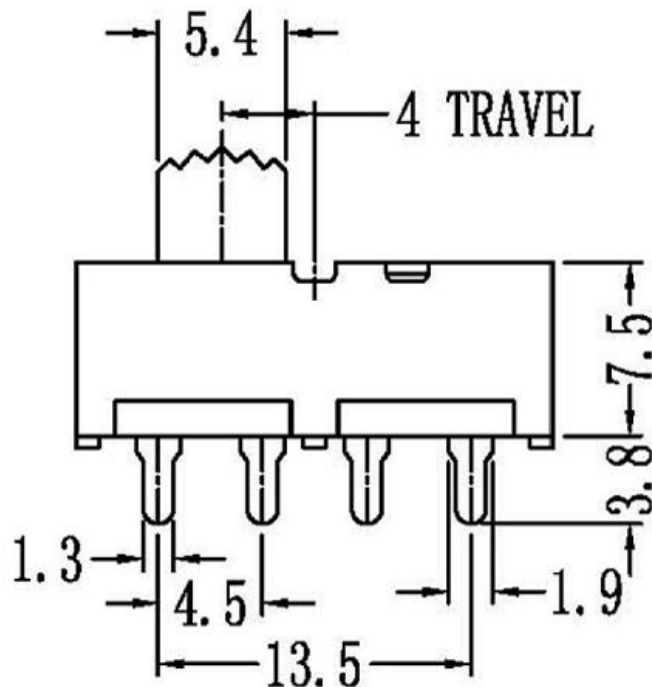

| X(mm) |
|-------|
| 2mm   |
| 3mm   |
| 4mm   |
| 5mm   |
| 6mm   |
| 7mm   |
| 8mm   |
| 9mm   |

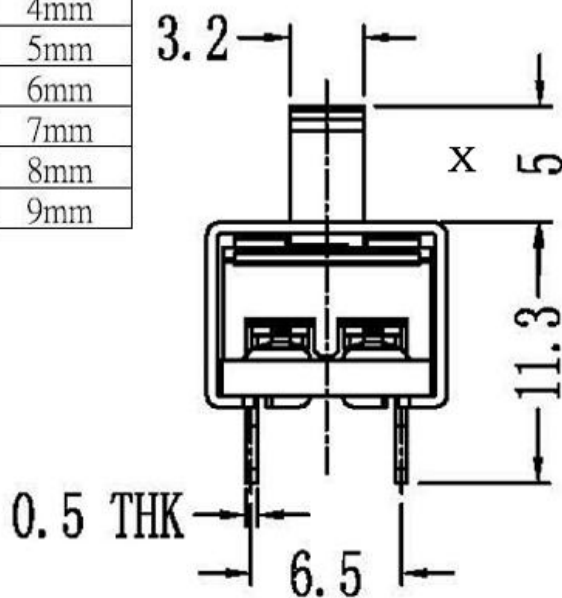

P.C.B LAYOUT  
BOTTOM VIEW

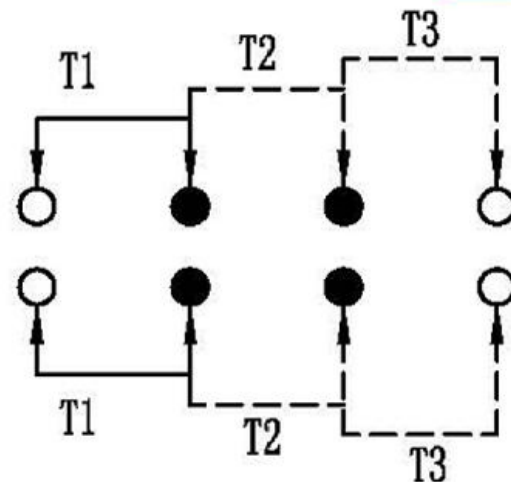

SCHEMATIC (NON-SHORTING)

- 1.RATING 额定值: 3A 250V AC
- 2.CONTACT RESISTANCE 接触电阻: 100mΩ以下
3. INSULATION RESISTANCE 绝缘电阻: 100MΩ以上 500DC/1min
- 4.DIELECTRIC STRENGTH 耐电压: 500V AC/1min
5. OPERATING FORCE 操作力度: 350±100gf
- 6.LIFE TEST 寿命测试: 10000cycles
- 7.SOLDERABILITY TEST 可焊性测试: 焊接面积可达95%以上
- 8.SOLDERING HEAT TEST 耐焊性测试: 过炉焊260°C 浸锡255±5°C 3±1 S 手焊 380±10°C 3±1 S
- 9.COLD TEST耐冷: -25±3°C 48H
- 10.HEAT TEST耐热: 70±2°C 48H
- 11.HUMIDITY 潮湿: 环境温度40±2°C 湿度90 ~95% 96H

| 7   | STEEL BALL   | 1   | STAINLESS       | Natural   |
|-----|--------------|-----|-----------------|-----------|
| 6   | SPRING       | 1   | STAINLESS       | Natural   |
| 5   | CONTACT CLIP | 1   | PHOSPHOR BRONZE | Ag-plated |
| 4   | TERMINAL     | 4   | BRASS           | Ag-plated |
| 3   | BASE         | 1   | PHENOLIC RESIN  | Natural   |
| 2   | FRAME        | 1   | SPCC            | Ni-Plated |
| 1   | KNOB         | 1   | POM             | Black     |
| NO. | DESCRIPTION  | QTY | MATERIAL        | REMARK    |



东莞市高迪电子有限公司  
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED:  
Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

3RD.



ANGEL'S




UNITS

MM


|              |          |           |          |              |
|--------------|----------|-----------|----------|--------------|
| DRAWN BY:    | DATE     | MAT'L     | TITLE    | SWITCH       |
| Jack Lu      | 11/20/14 |           |          |              |
| CHECKED BY:  | DATE     | FINISH    | MODE     | SLIDE SWITCH |
| Jacky Chen   | 11/20/14 |           |          |              |
| APPROVED BY: | DATE     | SCALE     | DWG NO.  | SIZE         |
| Tony Kao     | 11/20/14 | 1:1       |          | A4           |
|              |          | SHEET NO. | PART NO. | VER          |
|              |          | 1 of 1    |          | R3           |

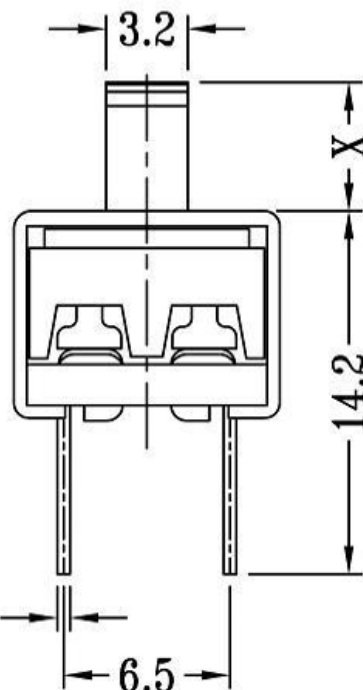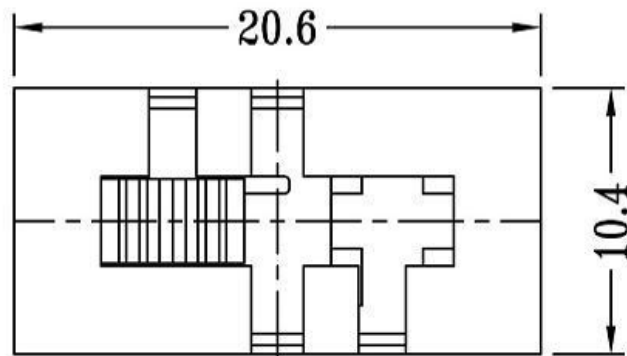


| X(mm) |
|-------|
| 2mm   |
| 3mm   |
| 4mm   |
| 5mm   |
| 6mm   |
| 7mm   |
| 8mm   |
| 9mm   |

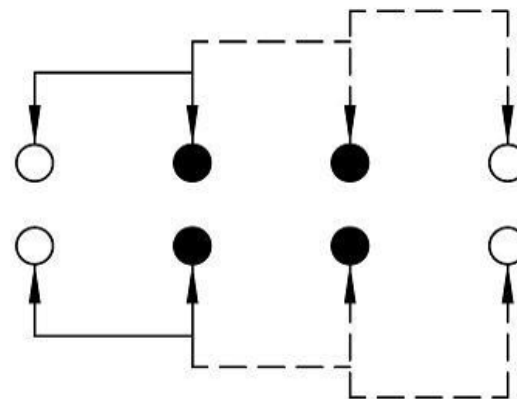

SCHEMATIC (NON-SHORTING)

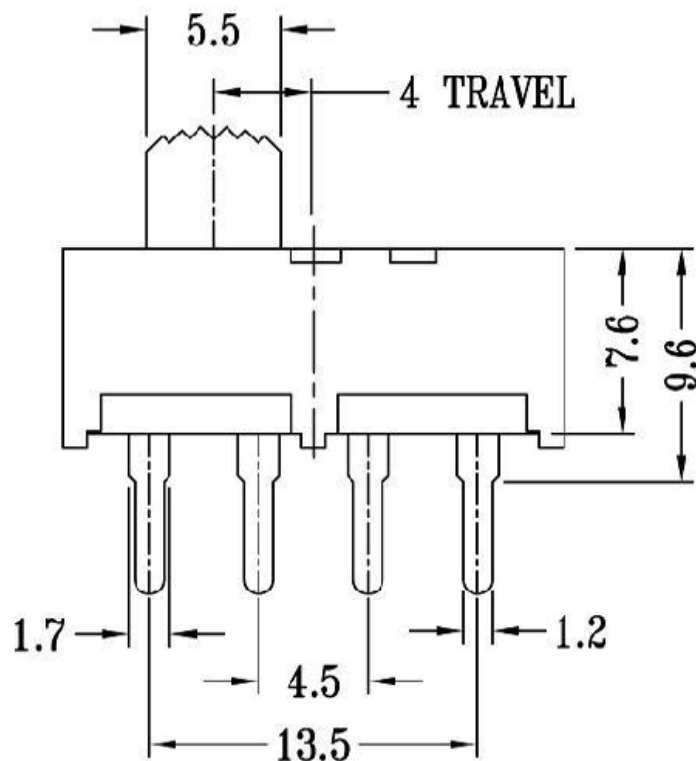

0.5 THK

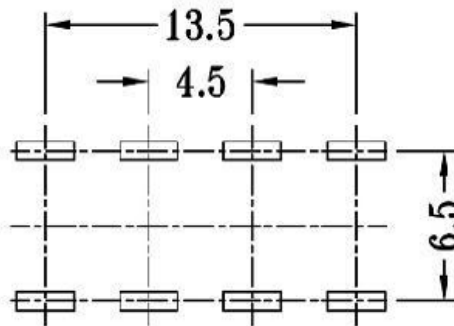

P.C.B LAYOUT  
BOTTOM VIEW

- 1.RATING 额定值: 3A 250V AC
- 2.CONTACT RESISTANCE 接触电阻: 100mΩ以下
3. INSULATION RESISTANCE 绝缘电阻: 100MΩ以上 500DC/1min
- 4.DIELECTRIC STRENGTH 耐电压: 500V AC/1min
5. OPERATING FORCE 操作力度: 350±100gf
- 6.LIFE TEST 寿命测试: 10000cycles
- 7.SOLDERA-BILITY TEST 可焊性测试: 焊接面积可达95%以上
- 8.SOLDERING HEAT TEST 耐焊性测试: 过炉焊260°C 浸锡255±5°C 3±1 S 手焊 380±10°C 3±1 S
- 9.COLD TEST耐冷: -25±3°C 48H
- 10.HEAT TEST耐热: 70±2°C 48H
- 11.HUMIDITY 潮湿: 环境温度40±2°C 湿度90 ~ 95% 96H

| 7   | STEEL BALL   | 1   | STAINLESS       | Natural   |
|-----|--------------|-----|-----------------|-----------|
| 6   | SPRING       | 1   | STAINLESS       | Natural   |
| 5   | CONTACT CLIP | 1   | PHOSPHOR BRONZE | Ag-plated |
| 4   | TERMINAL     | 4   | BRASS           | Ag-plated |
| 3   | BASE         | 1   | PHENOLIC RESIN  | Natural   |
| 2   | FRAME        | 1   | SPCC            | Ni-Plated |
| 1   | KNOB         | 1   | POM             | Black     |
| NO. | DESCRIPTION  | QTY | MATERIAL        | REMARK    |



东莞市高迪电子有限公司  
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS  
OTHERWISE STATED :

Up to 5  
Above 5 ~ 15  
Above 15 ~ 30  
Above 30 ~ 50  
Angle

±0.2  
±0.3  
±0.4  
±0.5  
±0.3°

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

11/20/14

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

SWITCH

SLIDE SWITCH

SIZE

A4

VER

R3