
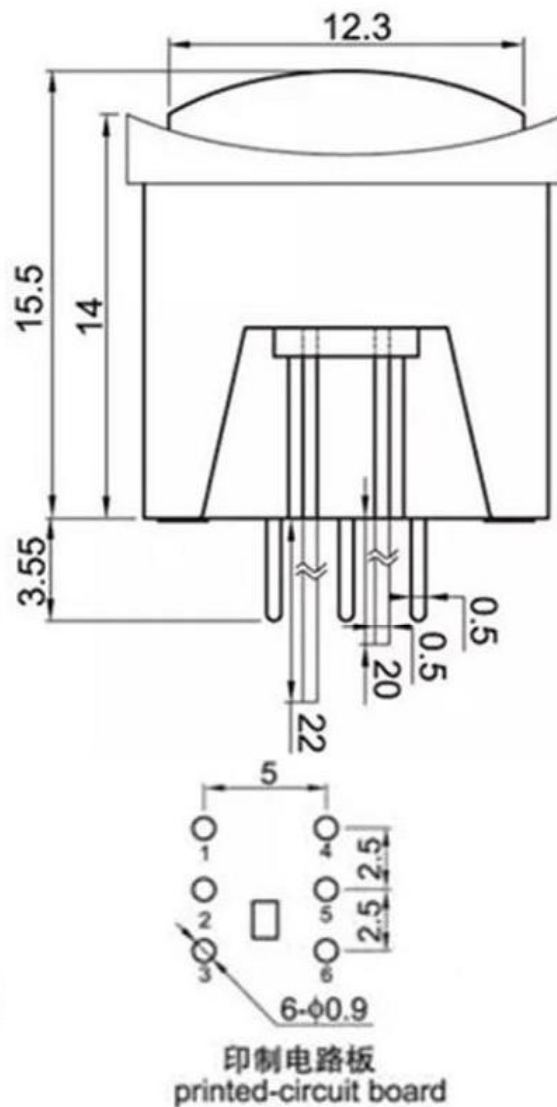
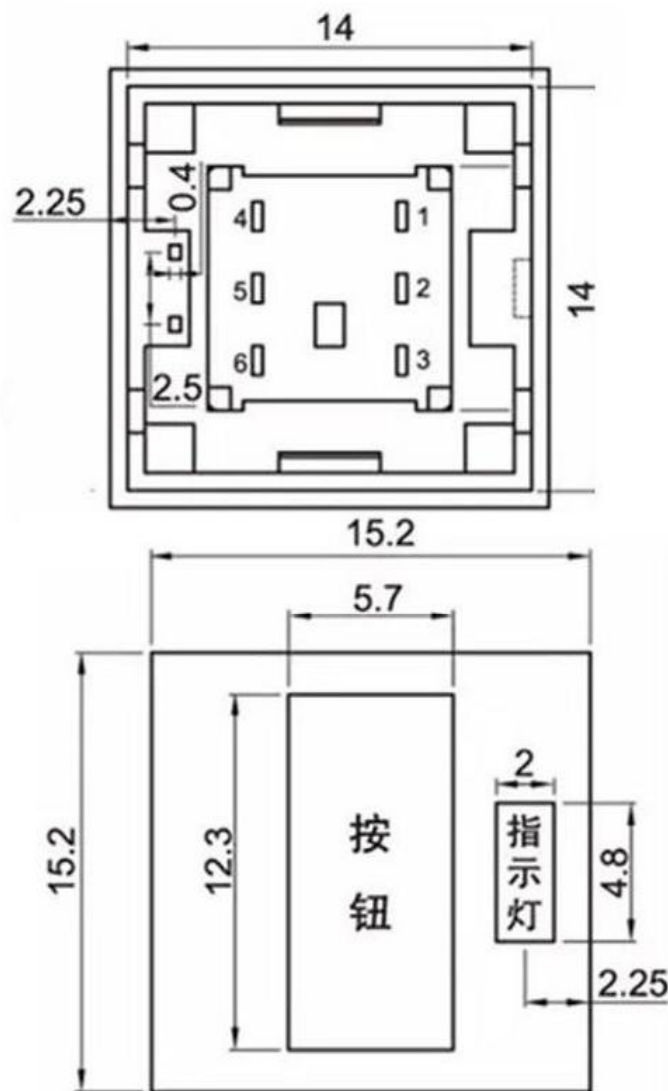




SCHEMATIC (NON-SHORTING)

SPECIFICATIONS

- (1)LIFE TEST:10000cycles at a speed of 15-18cycles
- (2)CONTACT RESISTANCE:100mΩmax
- (3)INSULATION RESISTANCE:100MΩmin
- (4)DIELETRIC STRENGTH:250V AC FOR 1MIN
- (5)OPERATING TEMPERATURE:-16°C-+60°C
- (6)RATING: 0.1A 30V DC
- (7)FUNCTION:2P2T
- (8)TIMING:NON-SHORTING
- (9)OPERATING FORCE:180gf±50gf

NO.	PARTS	MATERIALS	Q'TY	TOLERANCE UNLESS SPECIFIED	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
8				WITHIN 1.5mm : ±0.1mm	A	2016-10-14	初版	
7				OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
6								
5	SPRING	SUS304	1	NATURAL				
4	CAM STICK	SUS304	1	NATURAL				
3	CASE	PA66/BRASS STRIP	1	GREY/Ag PLATED				
2	COVER	PA66+15%F.G	1	BLACK				
1	KNOB	PA66+15%F.G/PBS STRIP	1	BLACK/Ag CLAD				
				TITLE : VERTICAL PUSH SWITCH		UNIT : mm	DRWG NO.:	
				MODEL:		SCALE: 5:1	DWN.	2016-10-14
							CHK'D	2016-10-14
							APPD.	



东莞市高迪电子有限公司
DONGGUANGAODIELECTRONICS CO.,LTD.