


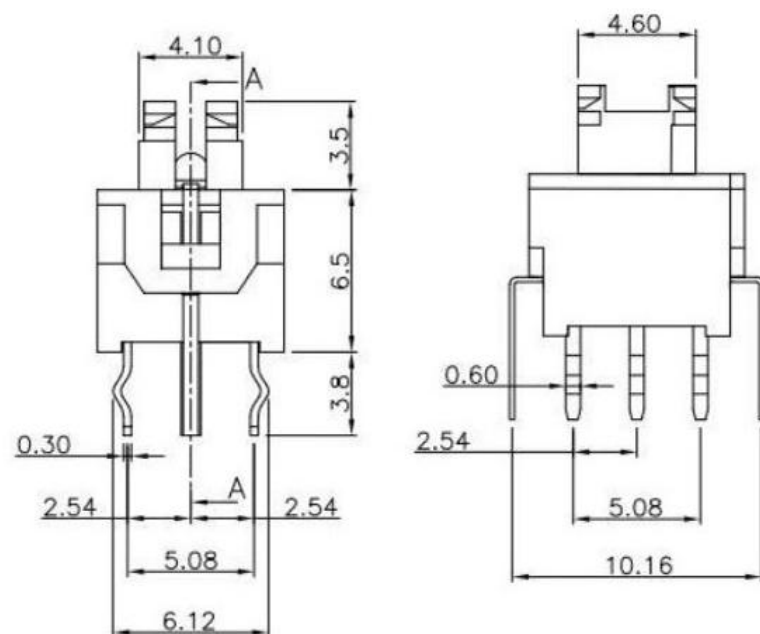




A-A

P.C.B LAYOUT

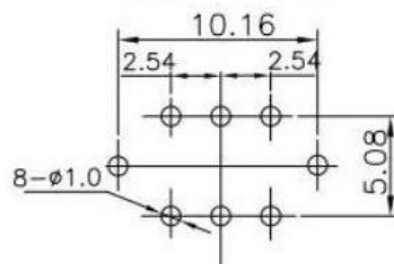

Type	Switch	Action	Circuit
LOCK	Normal ON	Push to lock OFF	
Connectong Terminal	1 - 2 4 - 5	2 - 3 5 - 6	
NO LOCK	Normal ON	Push (ON)	
Connectong Terminal	1 - 2 4 - 5	2 - 3 5 - 6	
LED Circuit	L1  L2		

LED COLOR					
1	2	3	4	5	6
Red	Yellow	Green	Blue	White	Pure Green

SPECIFICATIONS

- (1)LIFE TEST:10000cycles at a speed of 15-18cycles
- (2)CONTACT RESISTANCE:100mΩmax
- (3)INSULATION RESISTANCE:100MΩmin
- (4)DIELETRIC STRENGTH:250V AC FOR 1MIN
- (5)OPERATING TEMPERATURE:-16°C-+60°C
- (6)RATING: 0.1A 30V DC
- (7)FUNCTION:2P2T
- (8)TIMING:NON-SHORTING
- (9)OPERATING FORCE:180gf±50gf

NO.	PARTS	MATERIALS	Q'TY	TOLERANCE UNLESS SPECIFIED	DATE	DESCRIPTIONS OF REVISION	APPD.
8				WITHIN 1.5mm : ±0.1mm	A	2016-10-14	初版
7				OVER 1.5mm : ±0.2mm	ISSUE	DATE	
6							
5	SPRING	SUS304	1	NATURAL			
4	CAM STICK	SUS304	1	NATURAL			
3	CASE	PA66/BRASS STRIP	1	GREY/Ag PLATED			
2	COVER	PA66+15%F.G	1	BLACK			
1	KNOB	PA66+15%F.G/PBS STRIP	1	BLACK/Ag CLAD			
				TITLE : VERTICAL PUSH SWITCH		UNIT : mm	DRWG NO.:
				MODEL:		SCALE: 5:1	DWN.
							2016-10-14
							CHK'D
							2016-10-14
							APPD.



東莞市高迪電子有限公司
DONGGUANGAODIELECTRONICS CO.,LTD.