




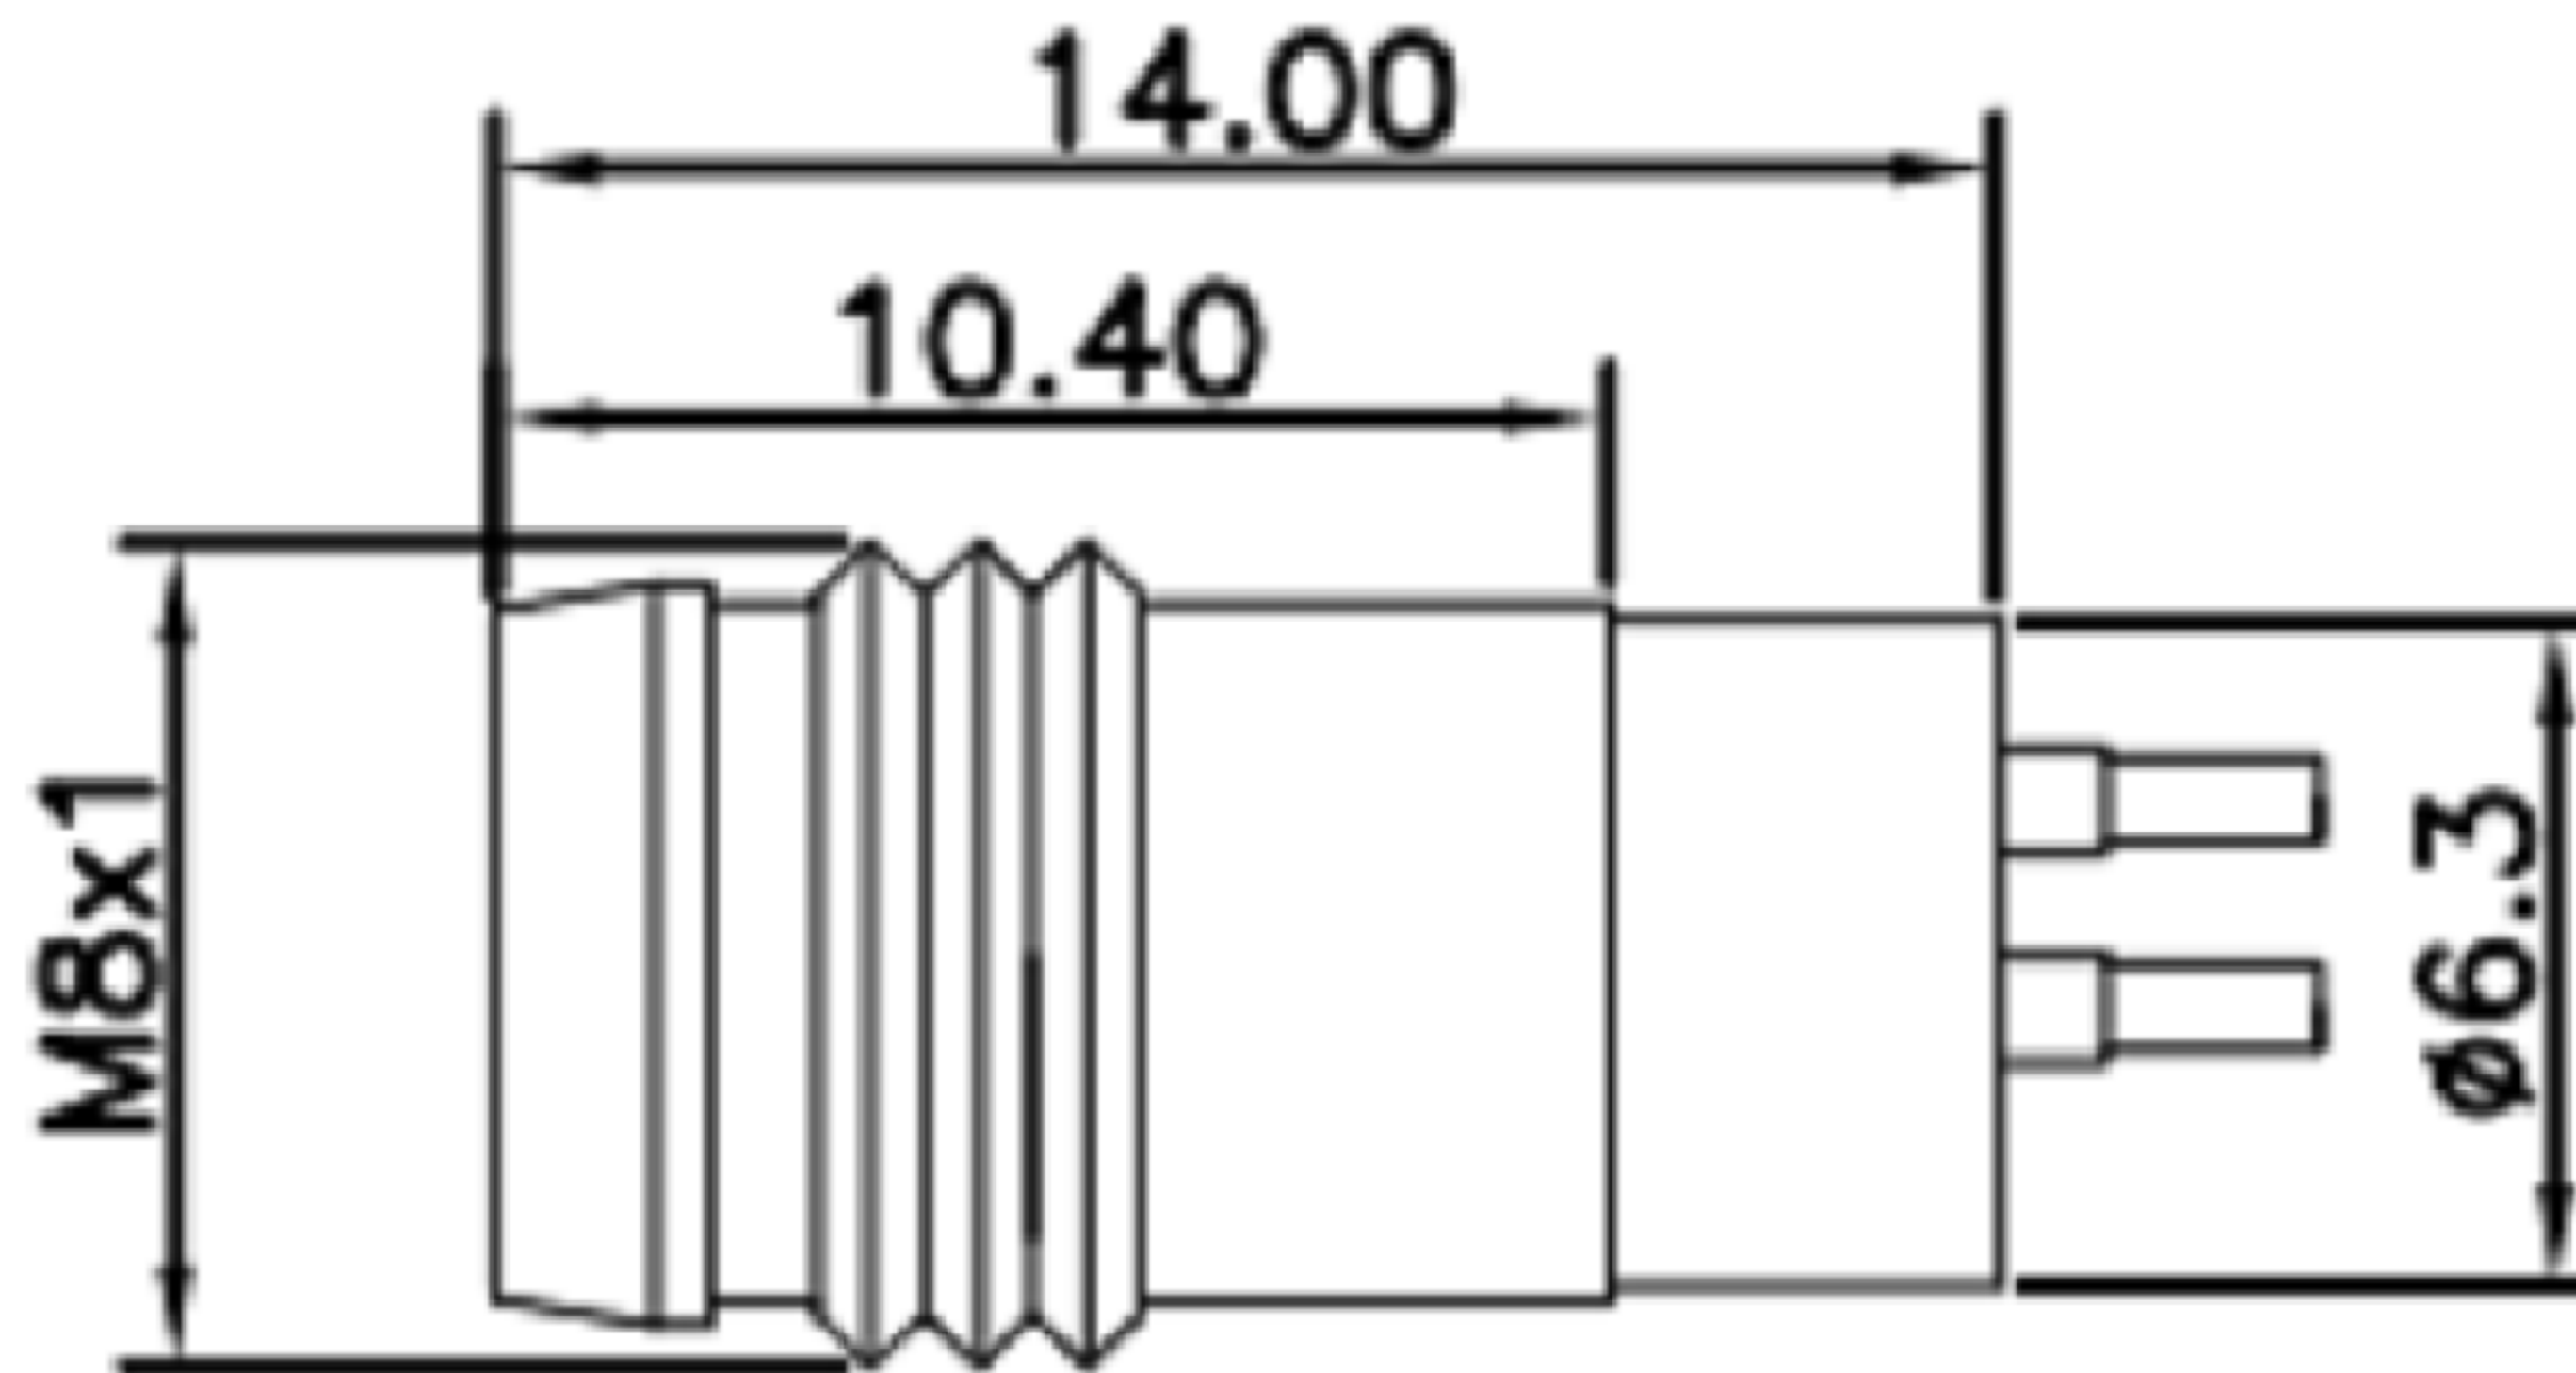


Pin assignment front view/针位分布前视图

2pin

3pin

4pin

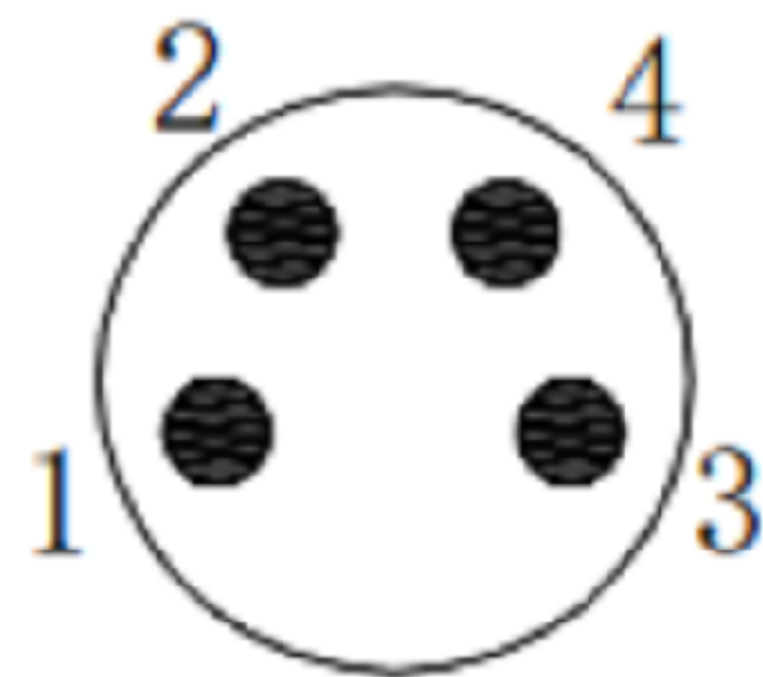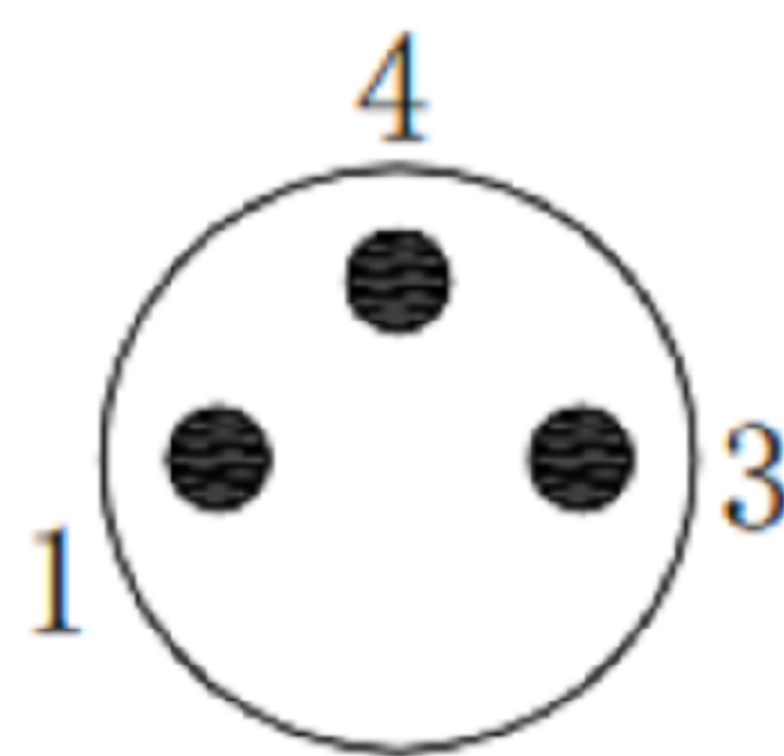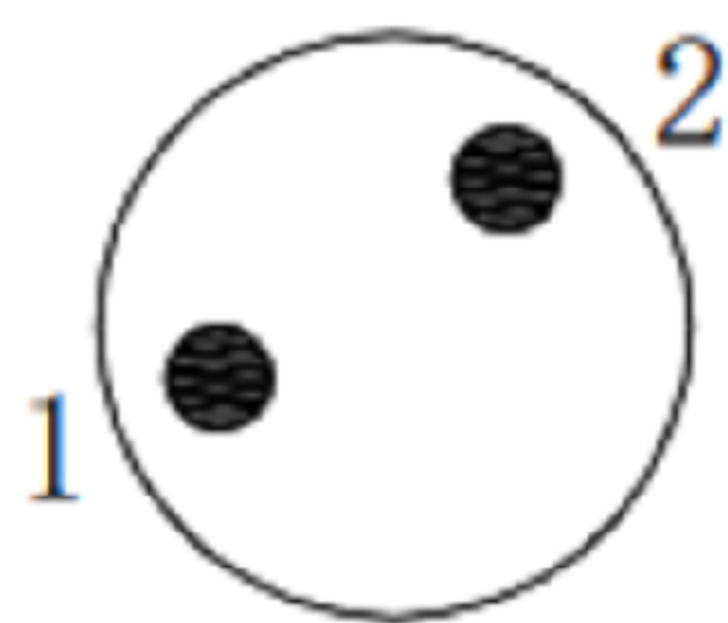

A-code

A-code

A-code

Order data/订货信息

Contacts/芯数	Coding	Part number/料号	Qty
02Pin	A-code	M08A02-03-034	1000pcs
03Pin	A-code	M08A03-03-034	1000pcs
04Pin	A-code	M08A04-03-034	1000pcs

Specifications/技术参数

Pin numbers/芯数	02 Pin	03 Pin	04 Pin			
Rated voltage/额定电压	60V	60V	60V			
Rated current/额定电流	4A	4A	4A			
Standards/regulations/标准	IEC 61076-2-104					
Termination接线方式	Dip-Solder/浸焊					
Connector locking system/锁紧方式	Screw螺栓					
Degree of protection/防护等级	IP67/IP68					
Mechanical operation/插拔次数	100 mating cycles Min					
Ambient temperature (operation)/工作温度	-25℃~+85℃					
Contact resistance/接触电阻	≤5mΩ					
Insulation resistance/绝缘电阻	≥1000MΩ					
Connector body material/胶芯材料	PA66					
Pin material/端子材料	Brass with gold plated					
Nut and shell material/螺母和铜壳材料	Brass with nickel plated					
Gasket material/胶圈材料	Fluorine ring/氟胶圈					
Black glue/黑色胶水	Epoxy resin/环氧树脂					




東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE
Jack Lu 12/13/19
CHECKED BY: DATE
Jacky Chen 12/13/19
APPROVED BY: DATE
Tony Kao 12/13/19

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	M08XXX-03-035
SCALE	1 : 1	DWG NO.	
SHEET NO.	1 of 1	PART NO.	

SIZE	A4
VER	R1