


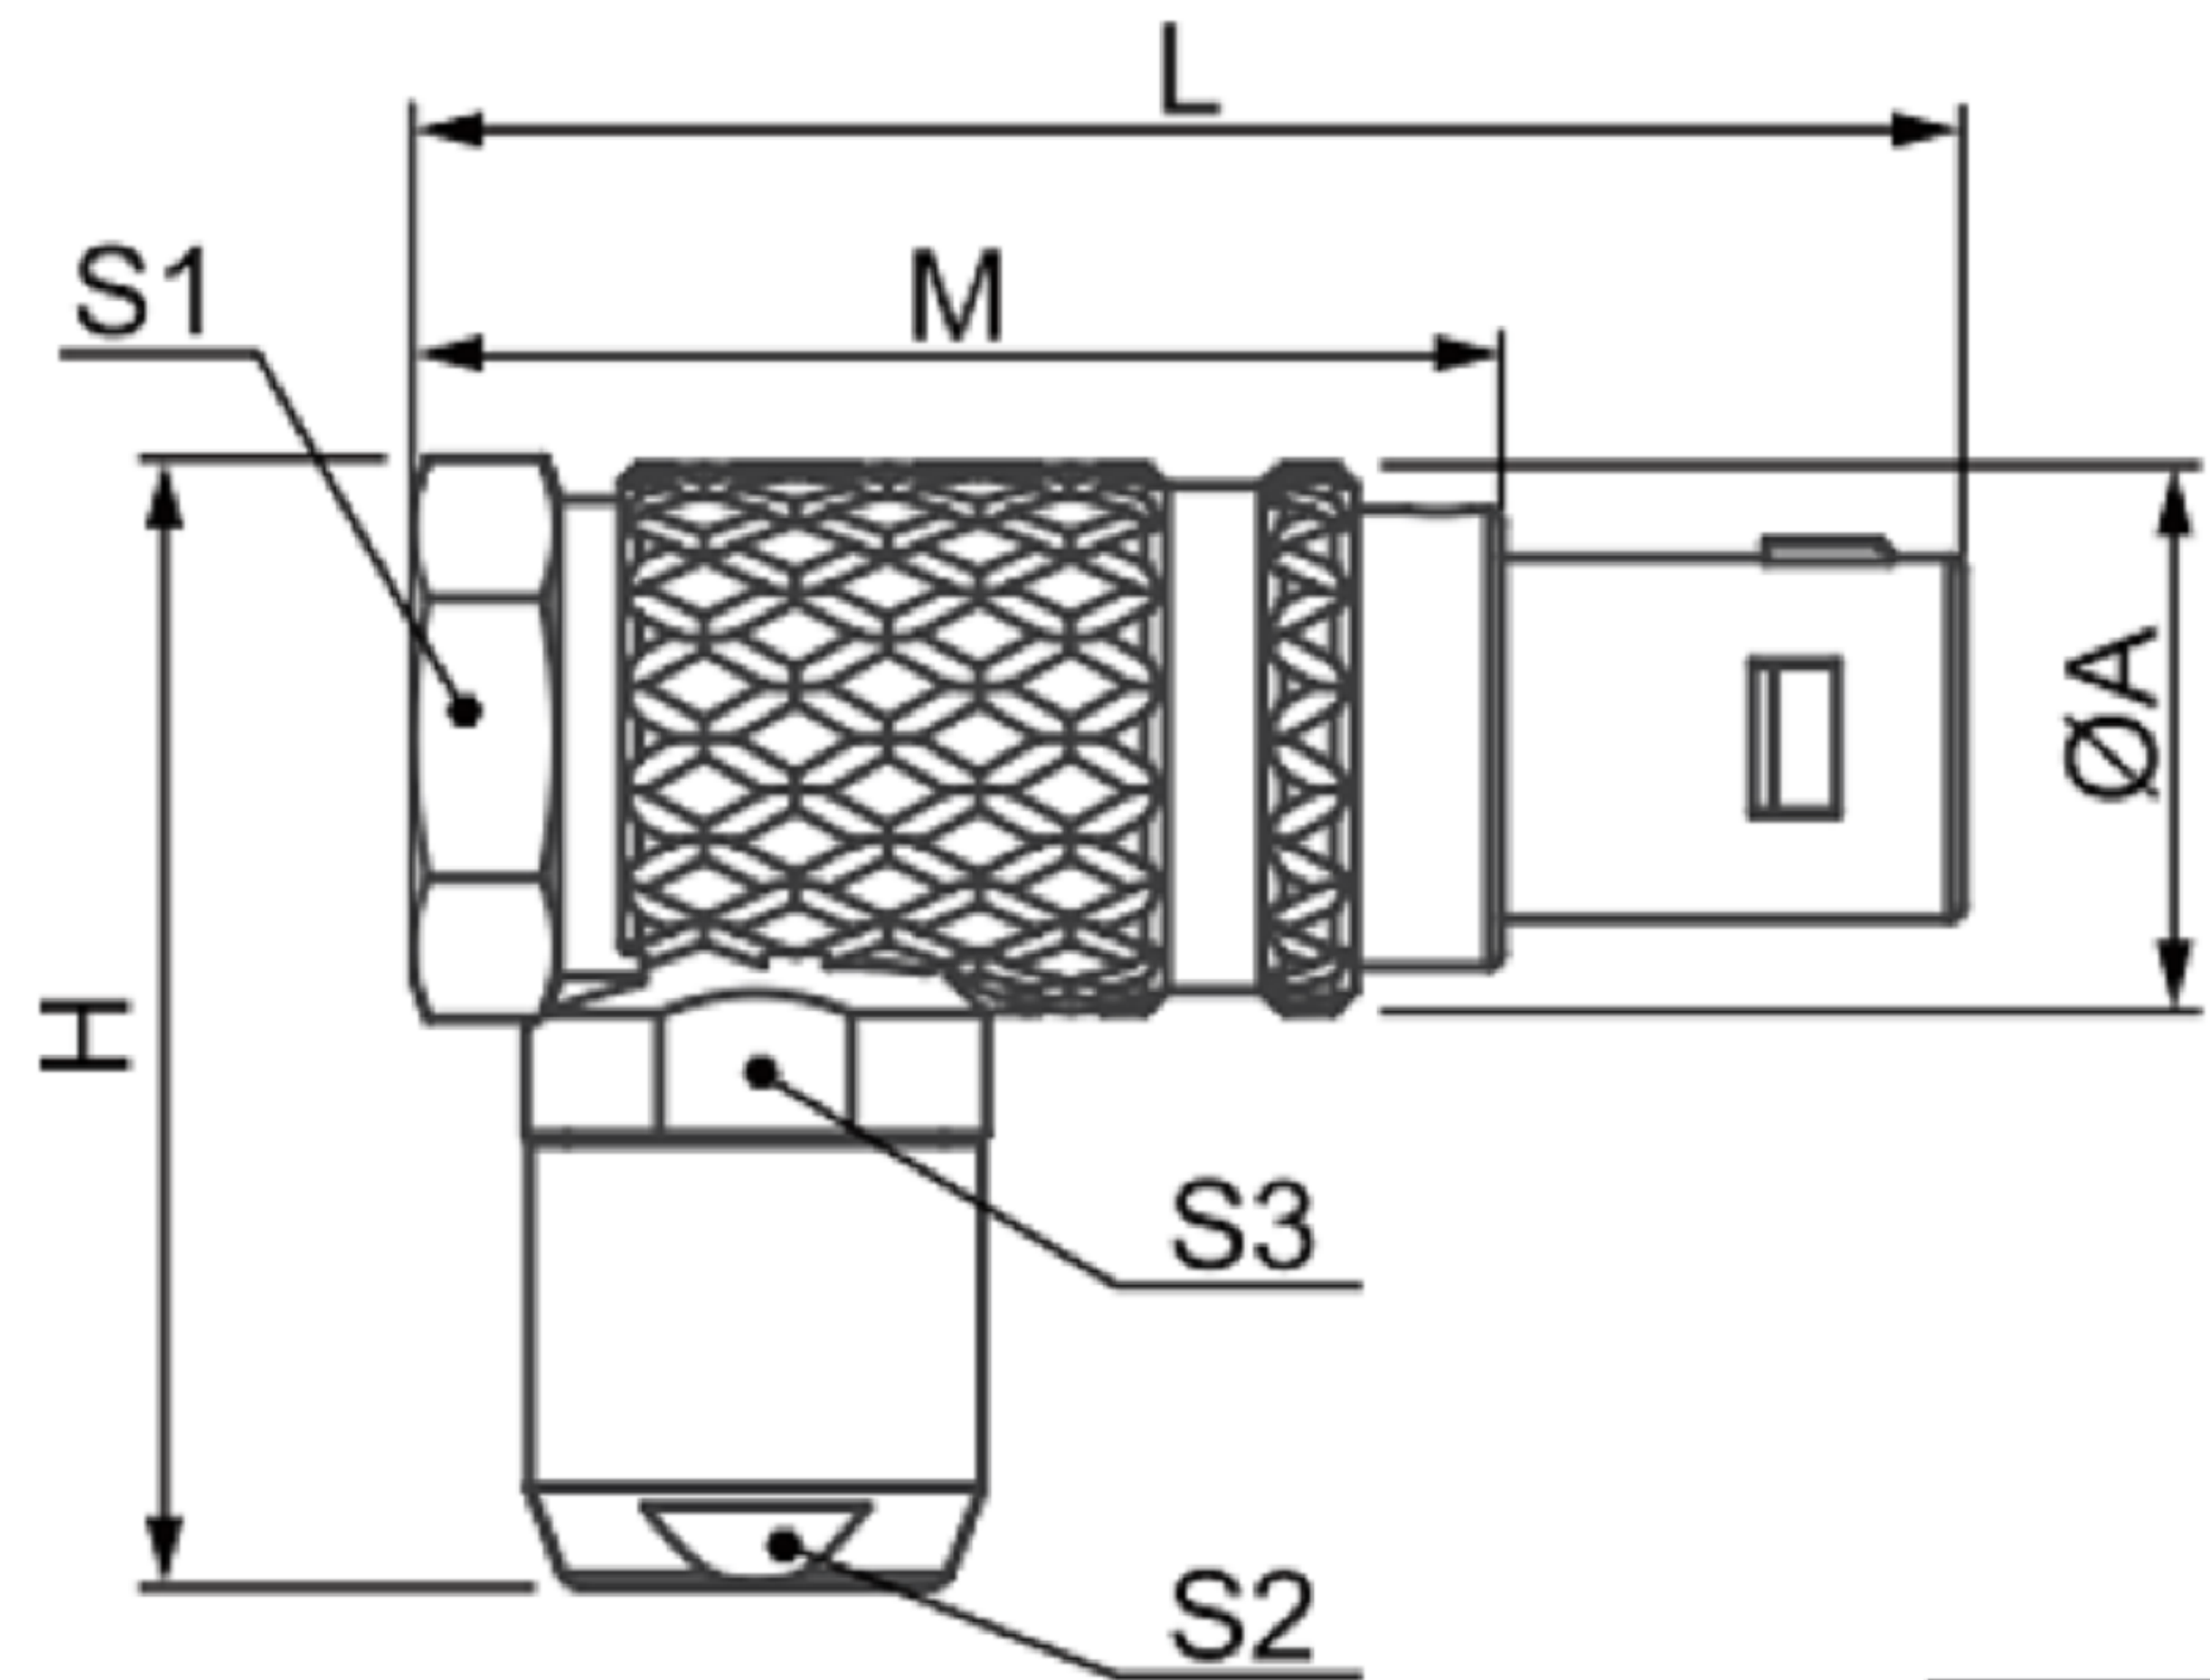

| 项目  |    | 尺寸(mm) |      |      |    |    |    |      |
|-----|----|--------|------|------|----|----|----|------|
| 系列  | 型号 | A      | L    | M    | S1 | S2 | S3 | H    |
| 00B | T3 | 7.7    | 25.1 | 17.1 | 7  | 5  | 4  | 18.5 |
| 0B  | T3 | 11     | 30   | 20   | 9  | 7  | 8  | 23   |
| 1B  | T3 | 13.5   | 37   | 26   | 12 | 9  | 10 | 30.5 |
| 2B  | T3 | 16.5   | 41.5 | 29.5 | 15 | 12 | 13 | 34   |
| 3B  | T3 | 19     | 50   | 35   | 18 | 15 | 15 | 37   |
| 4B  | T3 | 26     | 68   | 50   | 22 | 19 | 21 | 50.8 |

产品主要技术参数

| 特性    | 参数                     |
|-------|------------------------|
| 锁紧方式  | 推拉自锁式                  |
| 工作温度  | -55℃~+125℃             |
| 最大潮湿  | 在60℃/140°F时最高达到95%     |
| 屏蔽性能  | 75dB(10MHz) 40dB(1GHz) |
| 抗振动性能 | 15g[10Hz~2000Hz]       |

| 特性    | 参数       |
|-------|----------|
| 盐雾试验  | 96hr     |
| 抗冲击性能 | 100g,6ms |
| 机械寿命  | 5000次    |
| 防护等级  | IP50     |

 東莞市高迪電子有限公司  
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :  
Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

|              |          |           |          |           |
|--------------|----------|-----------|----------|-----------|
| DRAWN BY:    | DATE     | MAT'L     | TITLE    | CONNECTOR |
| Jack Lu      | 12/13/19 |           |          |           |
| CHECKED BY:  | DATE     | FINISH    | MODLE    | T3插头      |
| Jacky Chen   | 12/13/19 |           |          |           |
| APPROVED BY: | DATE     | SCALE     | DWG NO.  | SIZE      |
| Tony Kao     | 12/13/19 | 1 : 1     |          | A4        |
|              |          | SHEET NO. | PART NO. | VER       |
|              |          | 1 of 1    |          | R1        |