


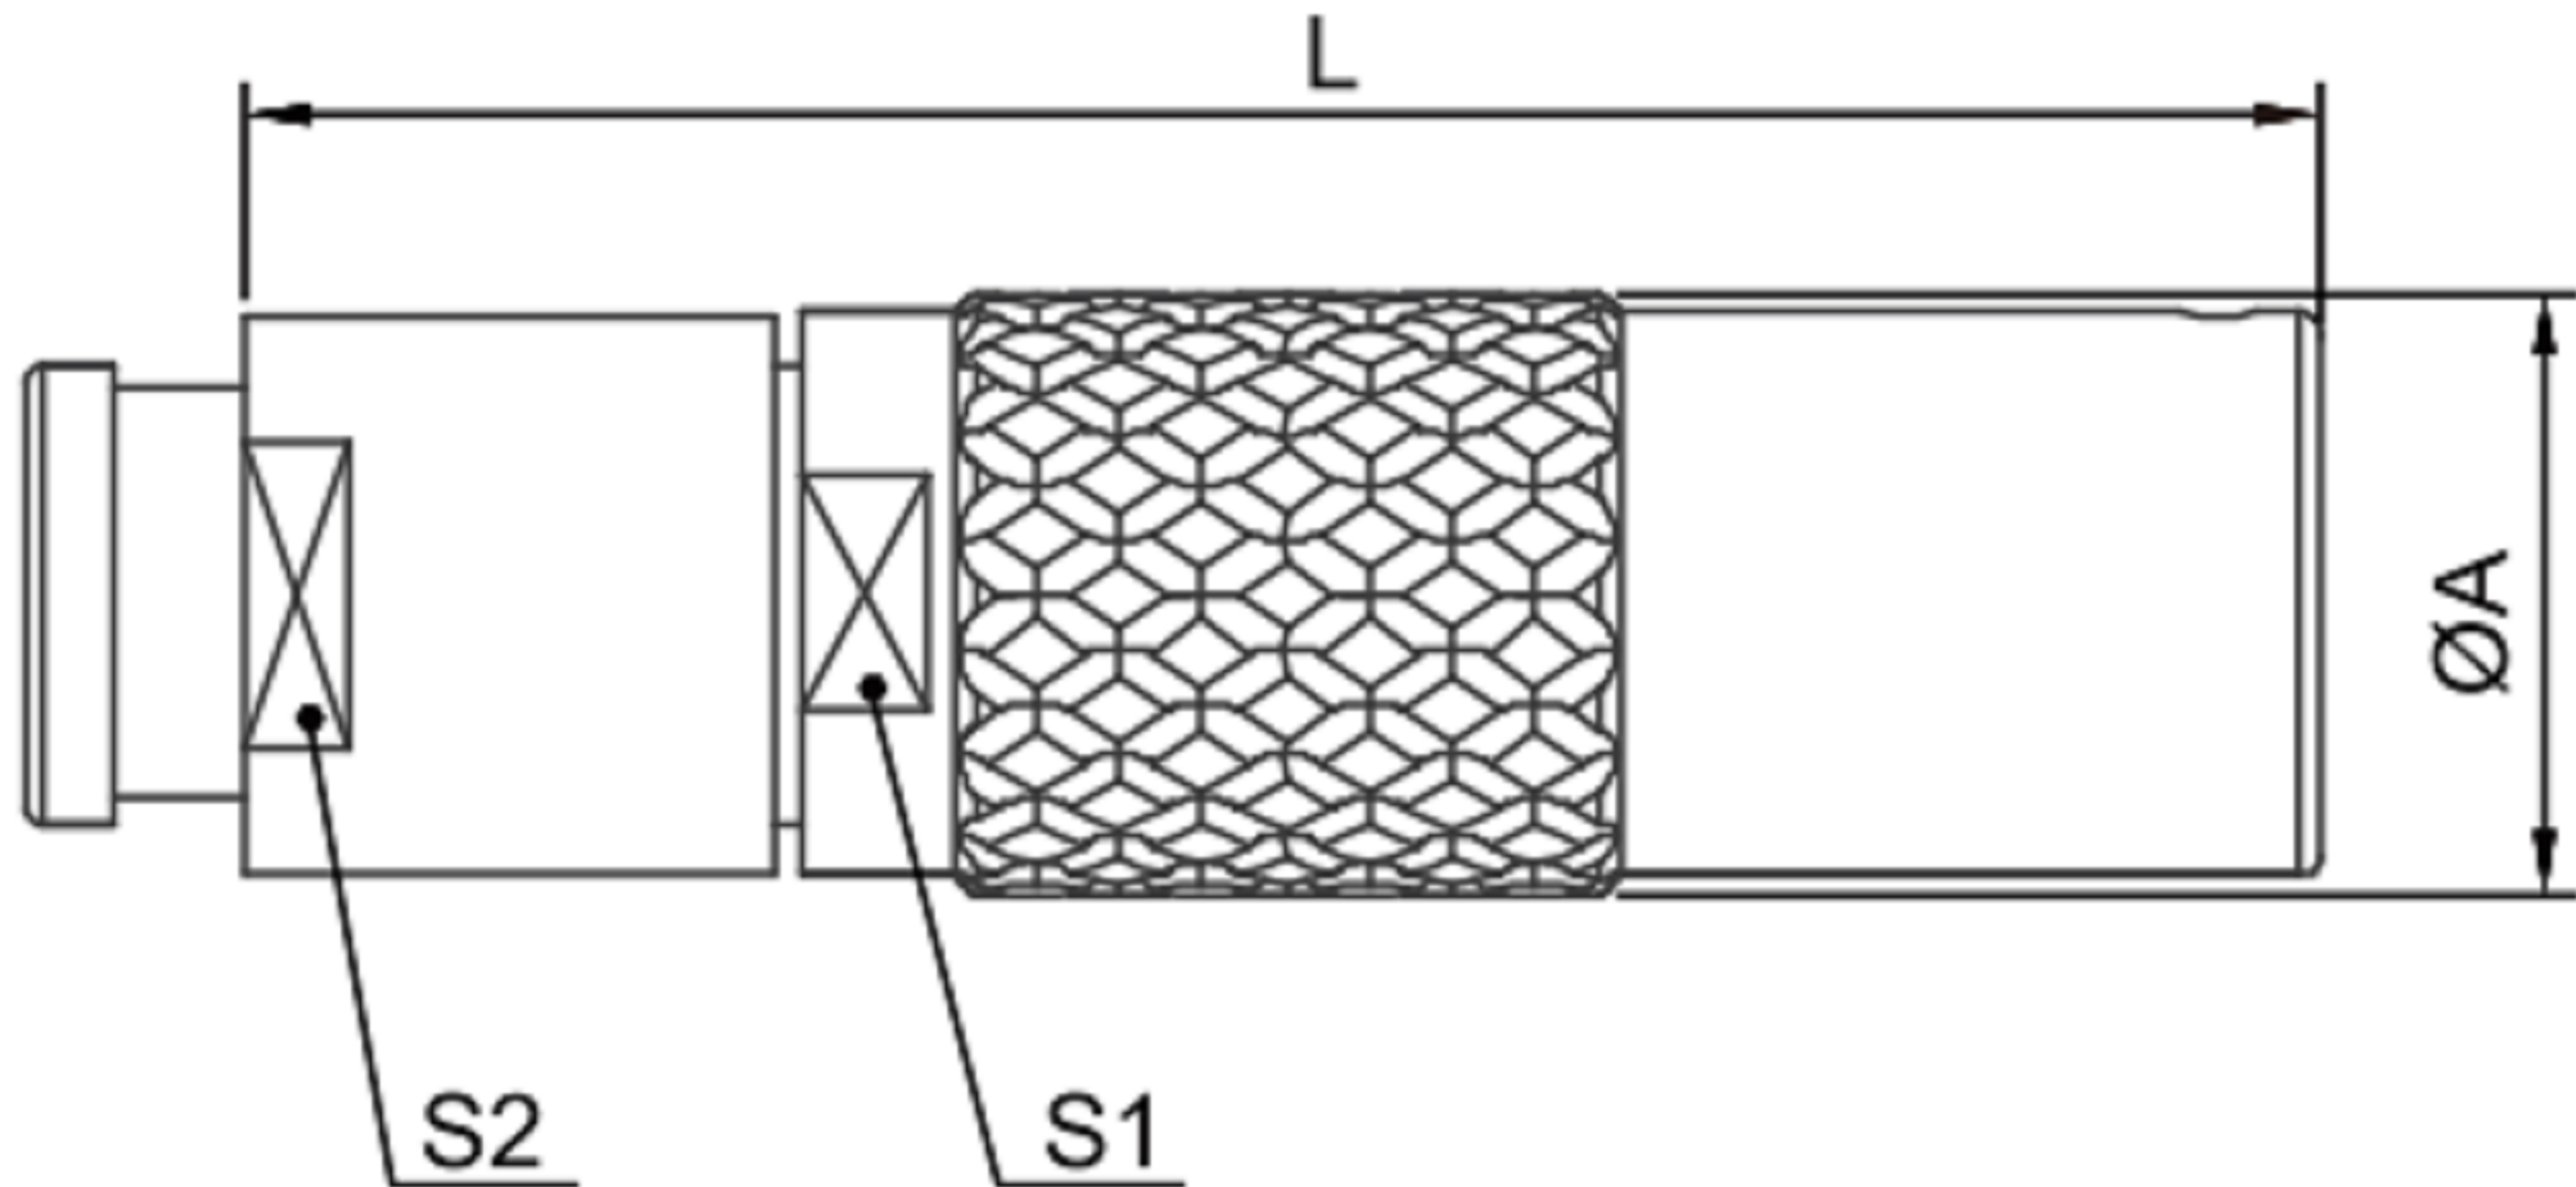

项目		尺寸(mm)			
系列	型号	A	L	S1	S2
00B	Z4	6.8	26.5	5.5	6
0B	Z4	9.6	34.5	8.0	8
1B	Z4	12.0	40.0	10.0	9
2B	Z4	16.5	48.0	13.0	13
3B	Z4	19.0	55.0	16.0	15

产品主要技术参数

特性	参数	特性	参数
锁紧方式	推拉自锁式	盐雾试验	96hr
工作温度	-55℃~+125℃	抗冲击性能	100g,6ms
最大潮湿	在60℃/140°F时最高达到95%	机械寿命	5000次
屏蔽性能	75dB(10MHz) 40dB(1GHz)	防护等级	IP68
抗振动性能	15g[10Hz~2000Hz]		

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°
3RD. ANGEL'S
UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	12/13/19			
CHECKED BY:	DATE	FINISH	MODLE	Z4插座
Jacky Chen	12/13/19			
APPROVED BY:	DATE	SCALE	DWG NO.	SIZE
Tony Kao	12/13/19	1 : 1		A4
		SHEET NO.	PART NO.	VER
		1 of 1		R1