

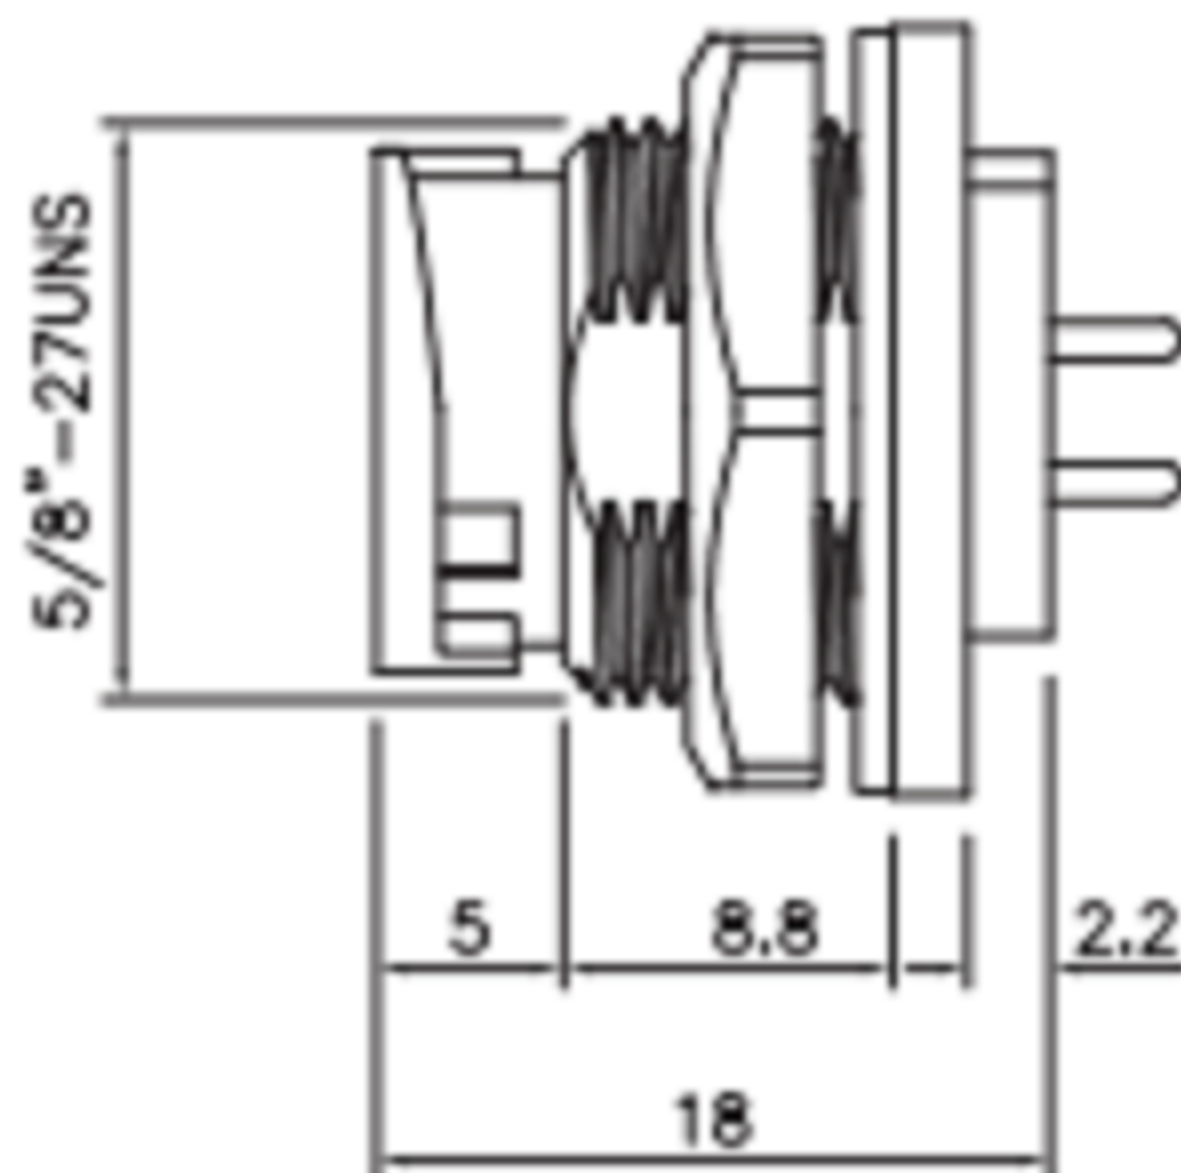


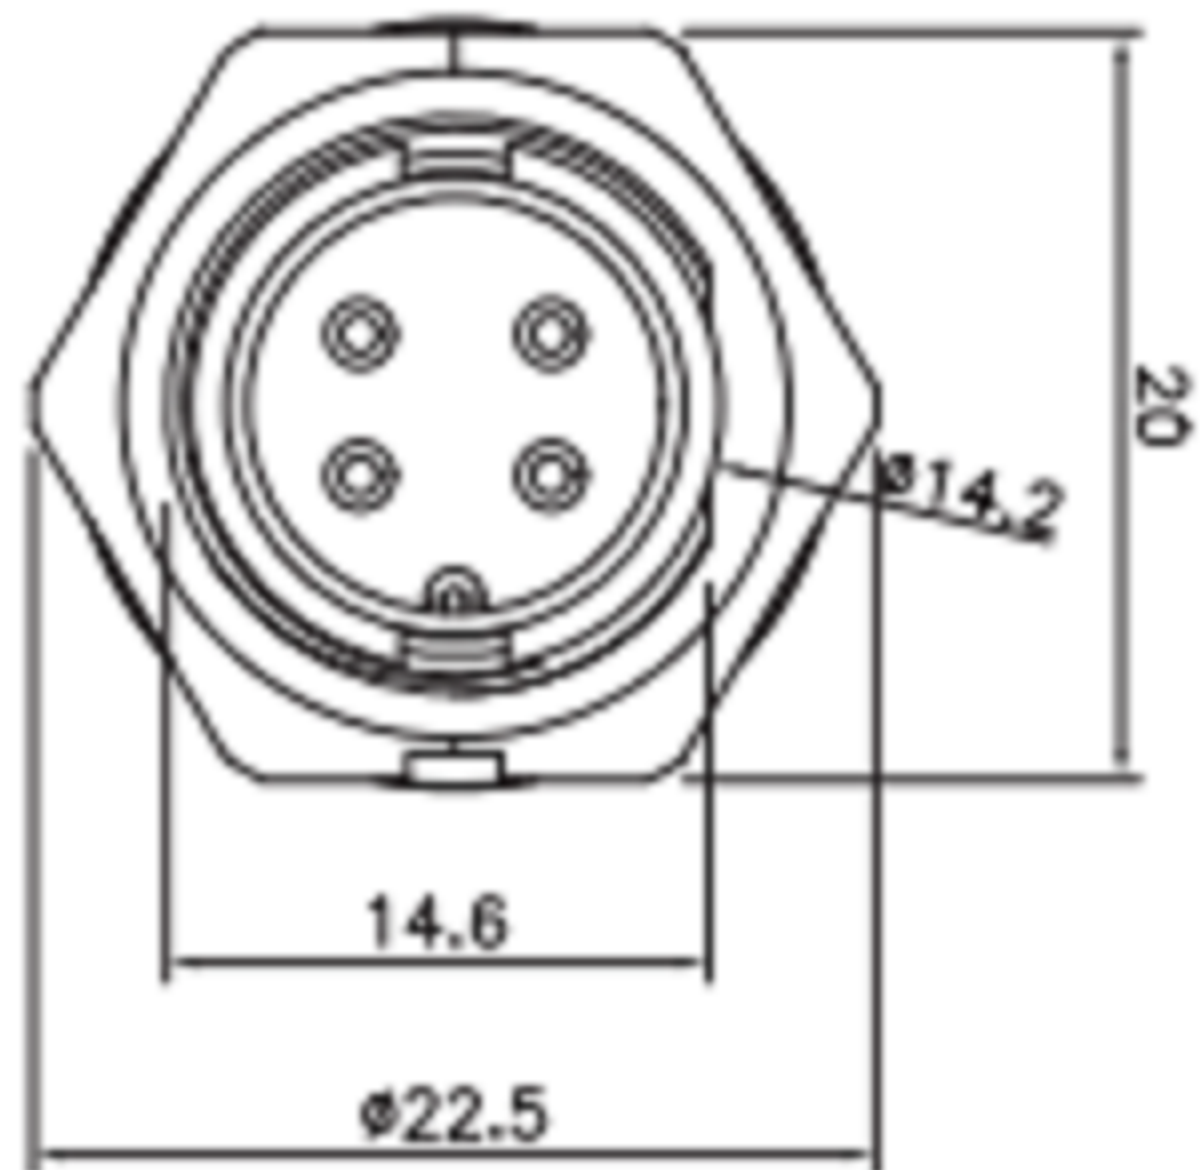

开孔尺寸
hole opening size

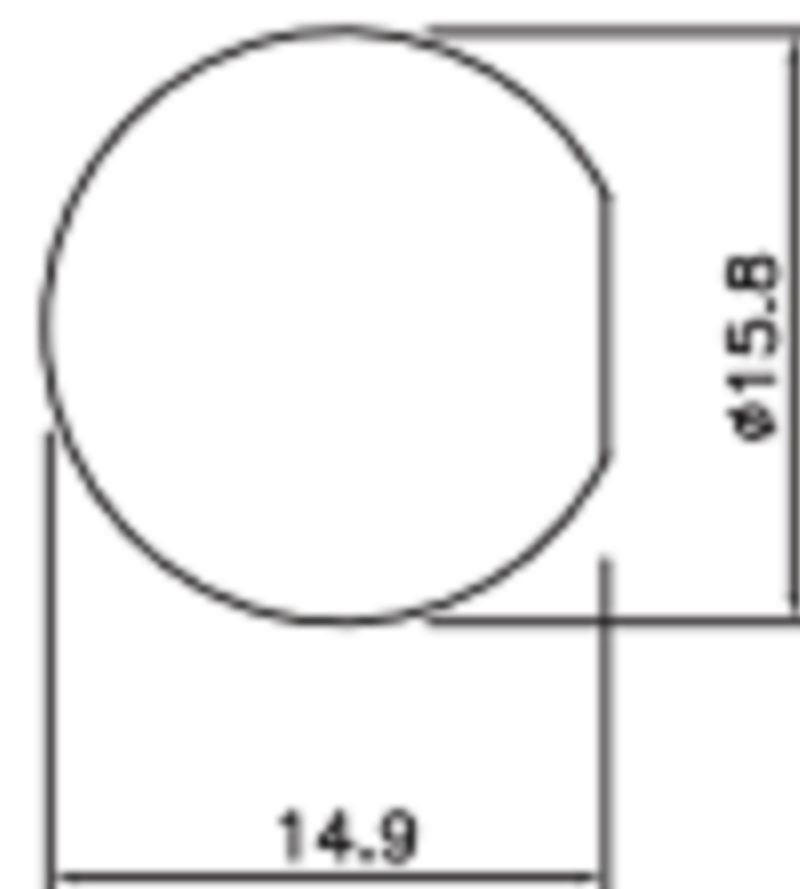



板后安装针型PCB板式插座(卡扣式) E10 Male Back Mount PCB Receptacle(Bayonet)

E10B - P 3B - PPF

芯数:
A:2 3 4 5 6 7
8 10 12
B:2B 3B 4B
C:2C 3C 4C



E10·PCB芯位图 E10 PCB Pins Arrangement

芯数 Pins	2	3	4	5	6	7	8	10	12		
A编码 A-Code											
芯数 Pins	2B	3B	4B					芯数 Pins	2C	3C	4C
B编码 B-Code								C编码 C-Code			

E10·电气参数 E10 ELECTRICAL PARAMETERS

芯数排列及技术参数 Pins Arrangement & Technical Parameters																
芯数 Pins	2B		3B		4B		2C		3C		4C					
芯位排布 Pins arrangement																
芯数 Pins	2	3	4	5	6	7	8	10	12							
芯位排布 Pins arrangement																
规格 SPECIFICATIONS																
芯数 Pins	2B	3B	4B	2C	3C	4C	2	3	4	5	6	7	8	10	12	
线规 Wire gauge	0.823mm ² (18AWG)						0.519mm ² (20AWG)								0.34mm ² (22AWG)	
引脚类型 Pin type	Ø 1.6mm						Ø 1.0mm								Ø 0.8mm	
接线范围 Wiring range	3.5mm-10.0mm															
防水等级 Waterproof grade	IP67/IP68															
插拔次数 Durability	500															
适应温度 Applicable temperature	-15℃-105℃															
额定电压 Rated voltage	300V	300V	300V	125V	125V	125V	60V	60V	60V	60V	60V	60V	60V	30V	30V	
额定电流 Rated current	10A	10A	10A	10A	10A	10A	5A	5A	5A	5A	5A	5A	5A	2A	2A	




东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Jack Lu 12/13/19

CHECKED BY: DATE

Jacky Chen 12/13/19

APPROVED BY: DATE

Tony Kao 12/13/19

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

E10B - P 3B - PPF-1

SIZE

A4

VER

R1