
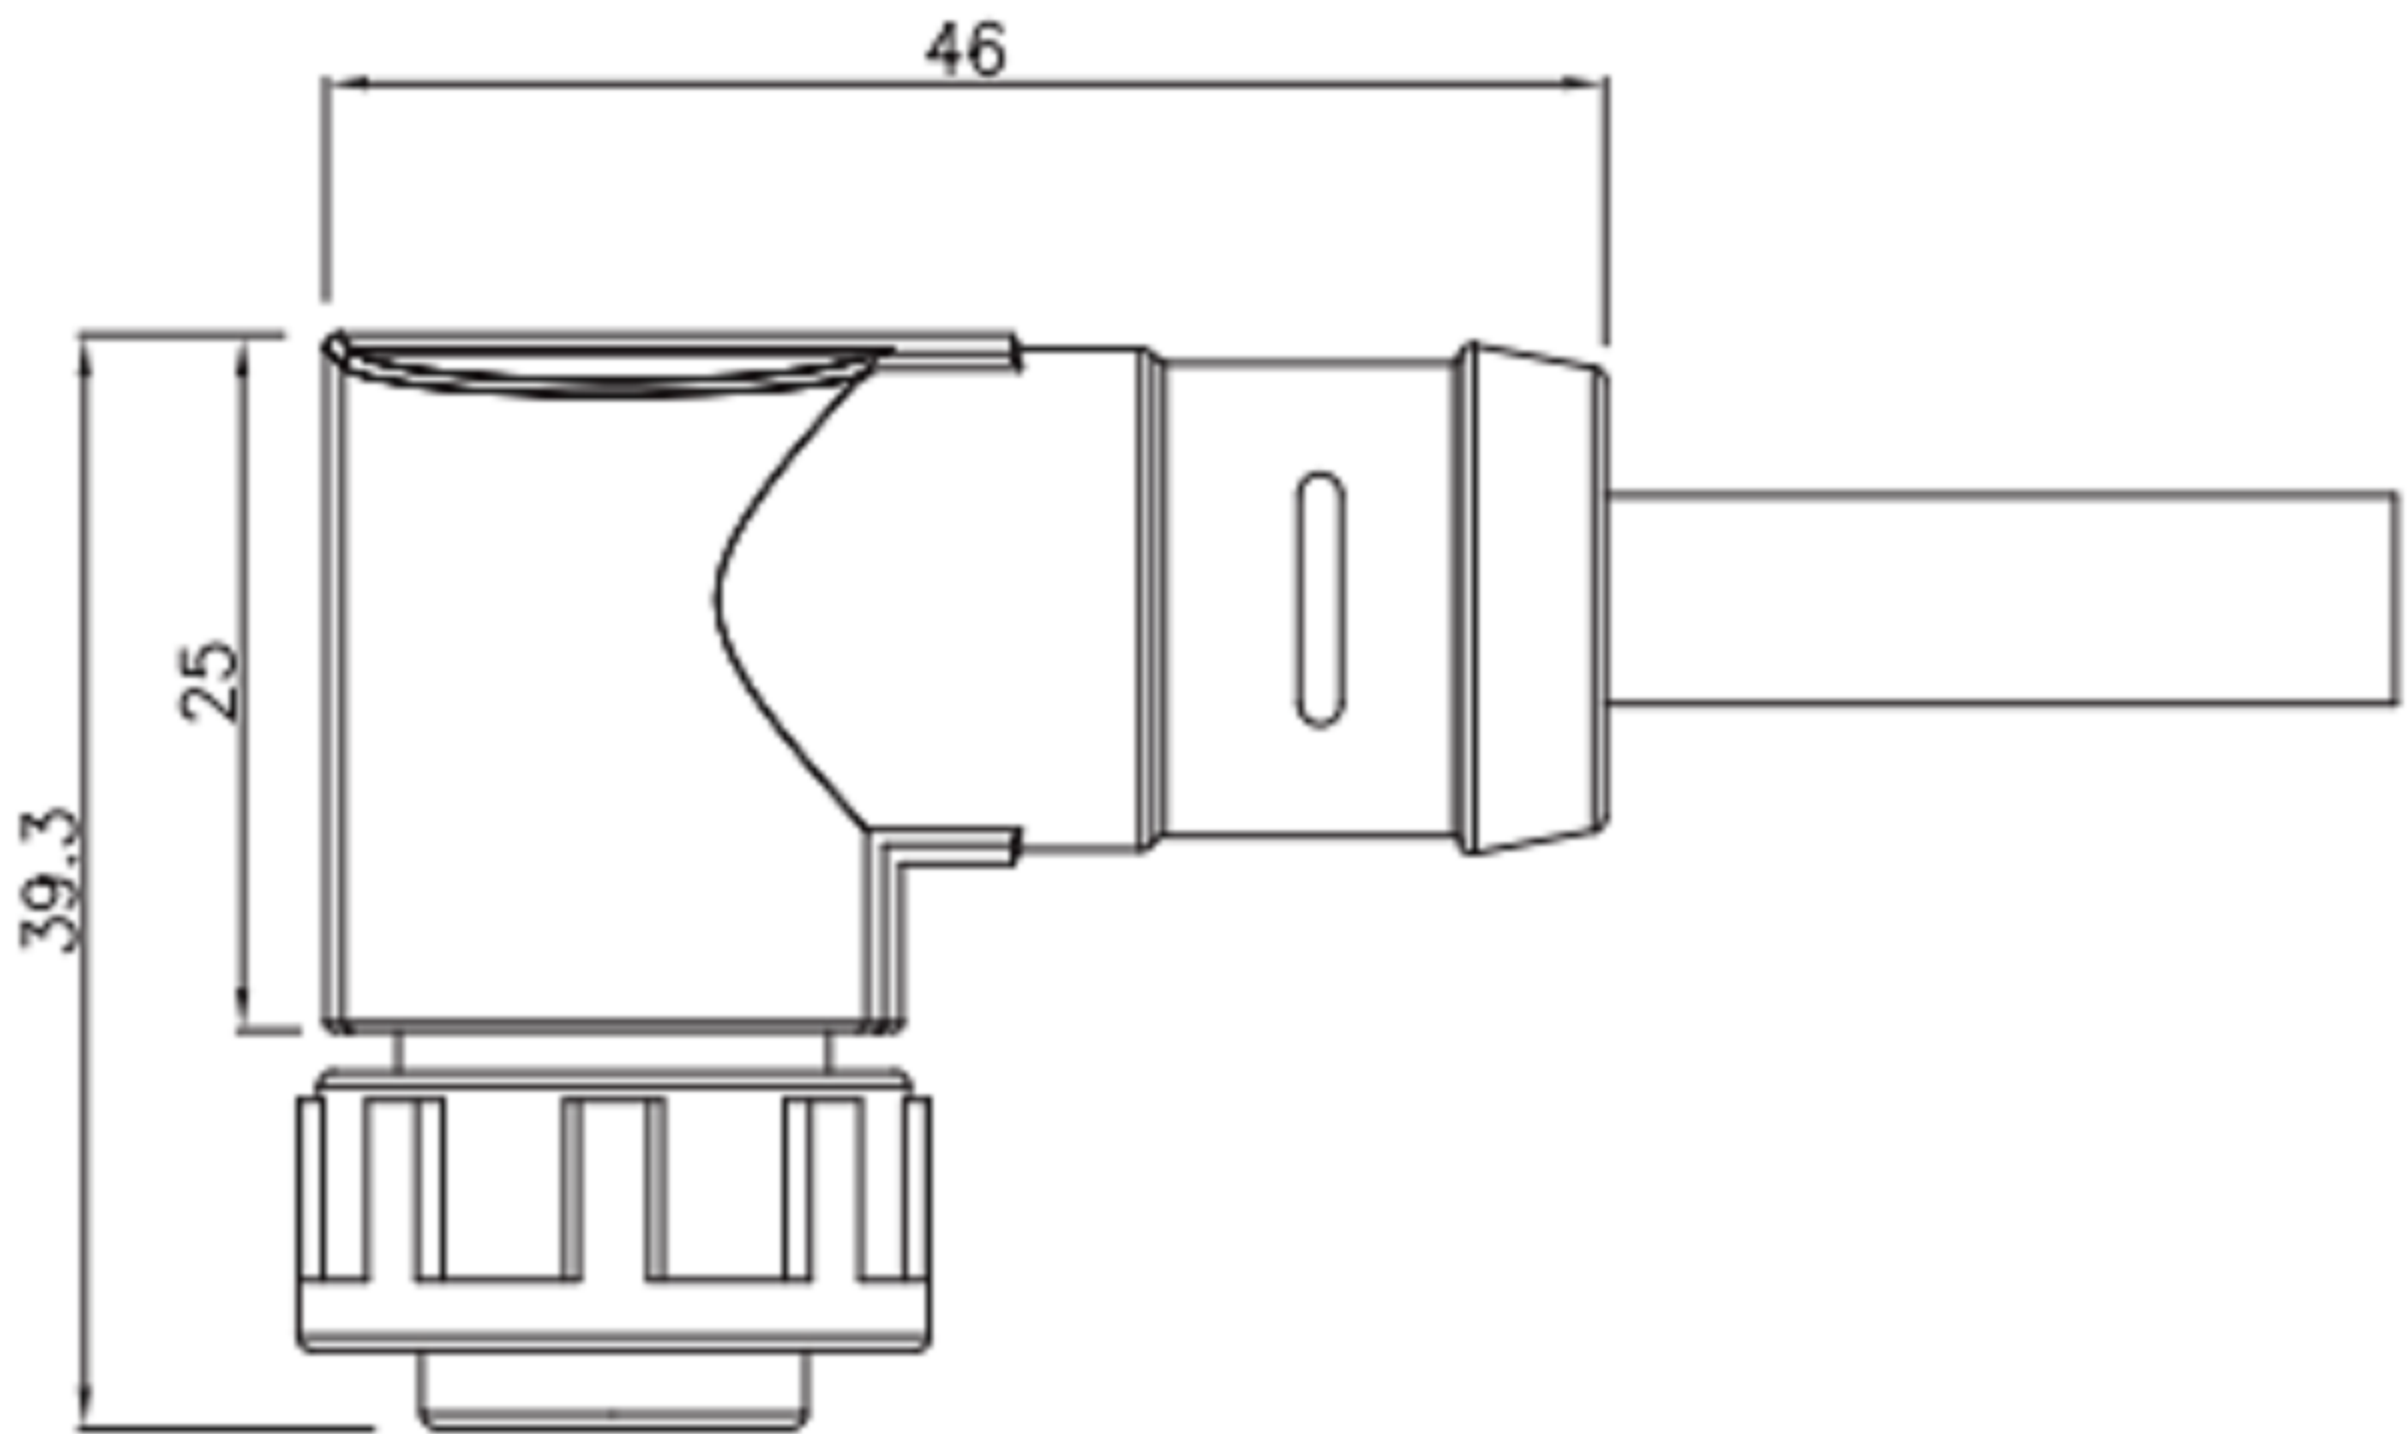


成型式孔型弯式插头(卡扣式)
E13 Right angle Female Overmolded Plug(Bayonet)

E13B - S 3B - MWD - 1 PV

芯数:
A:2 3 4 5 6 7 8 9
10 12 14 18
B:2B 3B 4B
C:8C

线长(M):
1:1M
2.5:2.5M
.....
线材:
PV:PVC
PU:PU

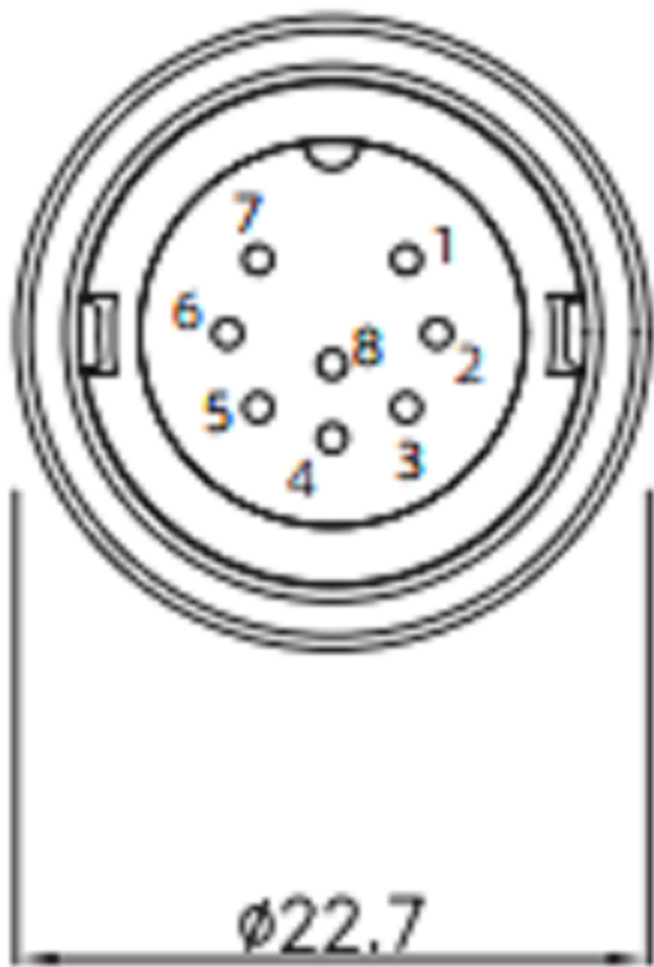

产品参数 PRODUCT PARAMETERS

外壳材料 热塑性塑料PA66 阻燃等级: V-0
Shell material Thermoplastic plastic PA66, flame retardant grade: V-0

绝缘电阻 2000 mΩ
Insulation resistance

插针材料 铜镀金
Contact material Copper gold-plated

适用温度 -40℃ ~ +105℃
Applicable temperature

连接方式 螺纹锁紧(T);卡扣锁紧(B)
Coupling Thread (T); Bayonet(B)

电缆线径 6.0mm~10.0mm
Cable diameter

接线方式 焊接
Termination way Solder

防水等级 IP67、IP68
Waterproof grade

插拔次数 ≥500次(Cycles)
Durability

東莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°
3RD. ANGEL'S
UNITS MM

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	12/13/19	FINISH		MODLE	E13B - S 3B - MWD - 1 PV
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	
Jacky Chen	12/13/19	SHEET NO.	1 of 1	PART NO.	
APPROVED BY:	DATE				
Tony Kao	12/13/19				