



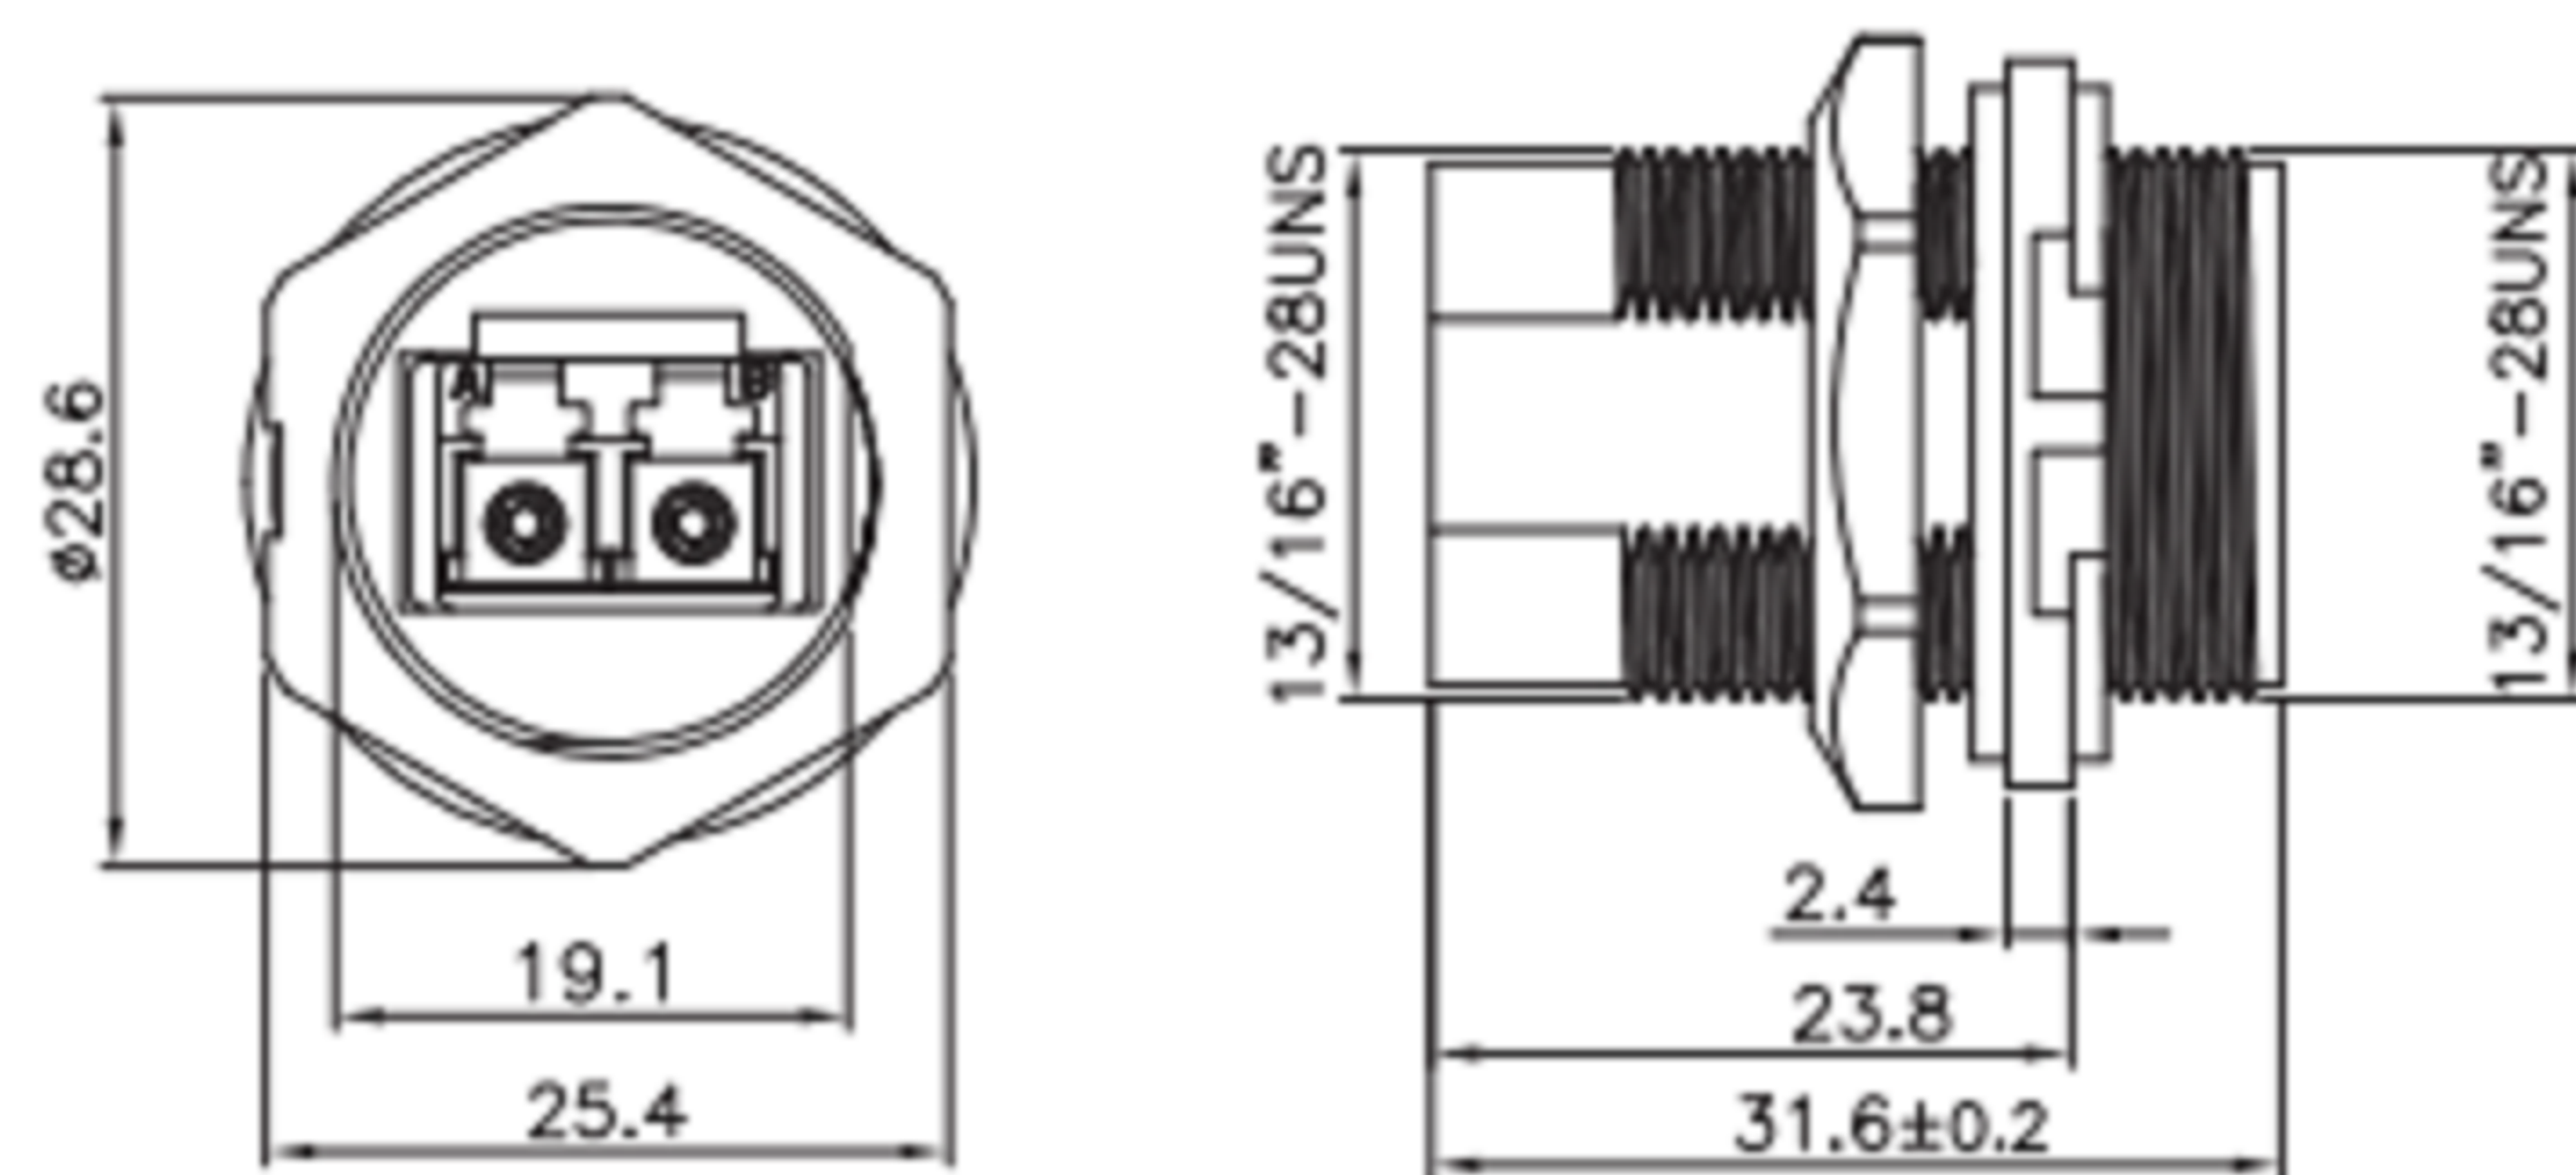

开孔尺寸
hole opening size

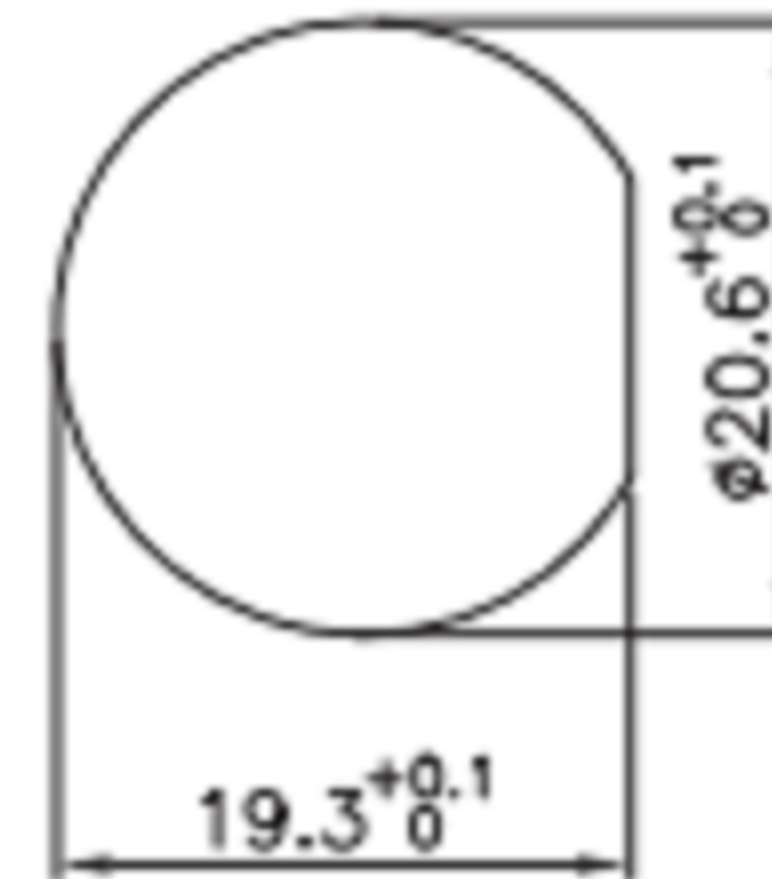

FDDI单模双芯板前安装插座(螺纹式)

FDDI Single-mode Double-core Front Mount Receptacle(Threaded)

E13T - F F2 - PRB

产品参数 PRODUCT PARAMETERS

塑料材料 Plastic Material	PA66, 尼龙, 增强尼龙, 硅胶 PA66, Nylon, Reinforced Nylon, Silicone	绝缘电阻 Insulation resistance	$\geq 100 \text{ m}\Omega \text{ DC500V}$
金属材料 Metal Material	铜镀金 Copper gold-plated	接触电阻 Contact resistance	30 m Ω
连接方式 Coupling	螺纹锁紧(T); 卡扣锁紧(B) Thread (T); Bayonet(B)	适用温度 Applicable temperature	-40°C ~ +105°C
接线方式 Termination way	焊接、焊板 Solder, Welding plate	额定电流 Rated current	50 mA
插拔次数 Durability	≥ 500 次(Cycles)	防水等级 Waterproof grade	IP67

 东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	12/13/19	FINISH		MODLE	E13T - F F2 - PRB
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	
Jacky Chen	12/13/19	SHEET NO.	1 of 1	PART NO.	
APPROVED BY:	DATE				
Tony Kao	12/13/19				

SIZE
A4
VER
R1