




RJ45母/母180°板后插座(螺纹式)  
RJ45 Female to Female(180°) Back Mount Receptacle(Threaded)

E13T - F R6 - PRF - 180

RJ45:  
R5:5E  
R6:6E

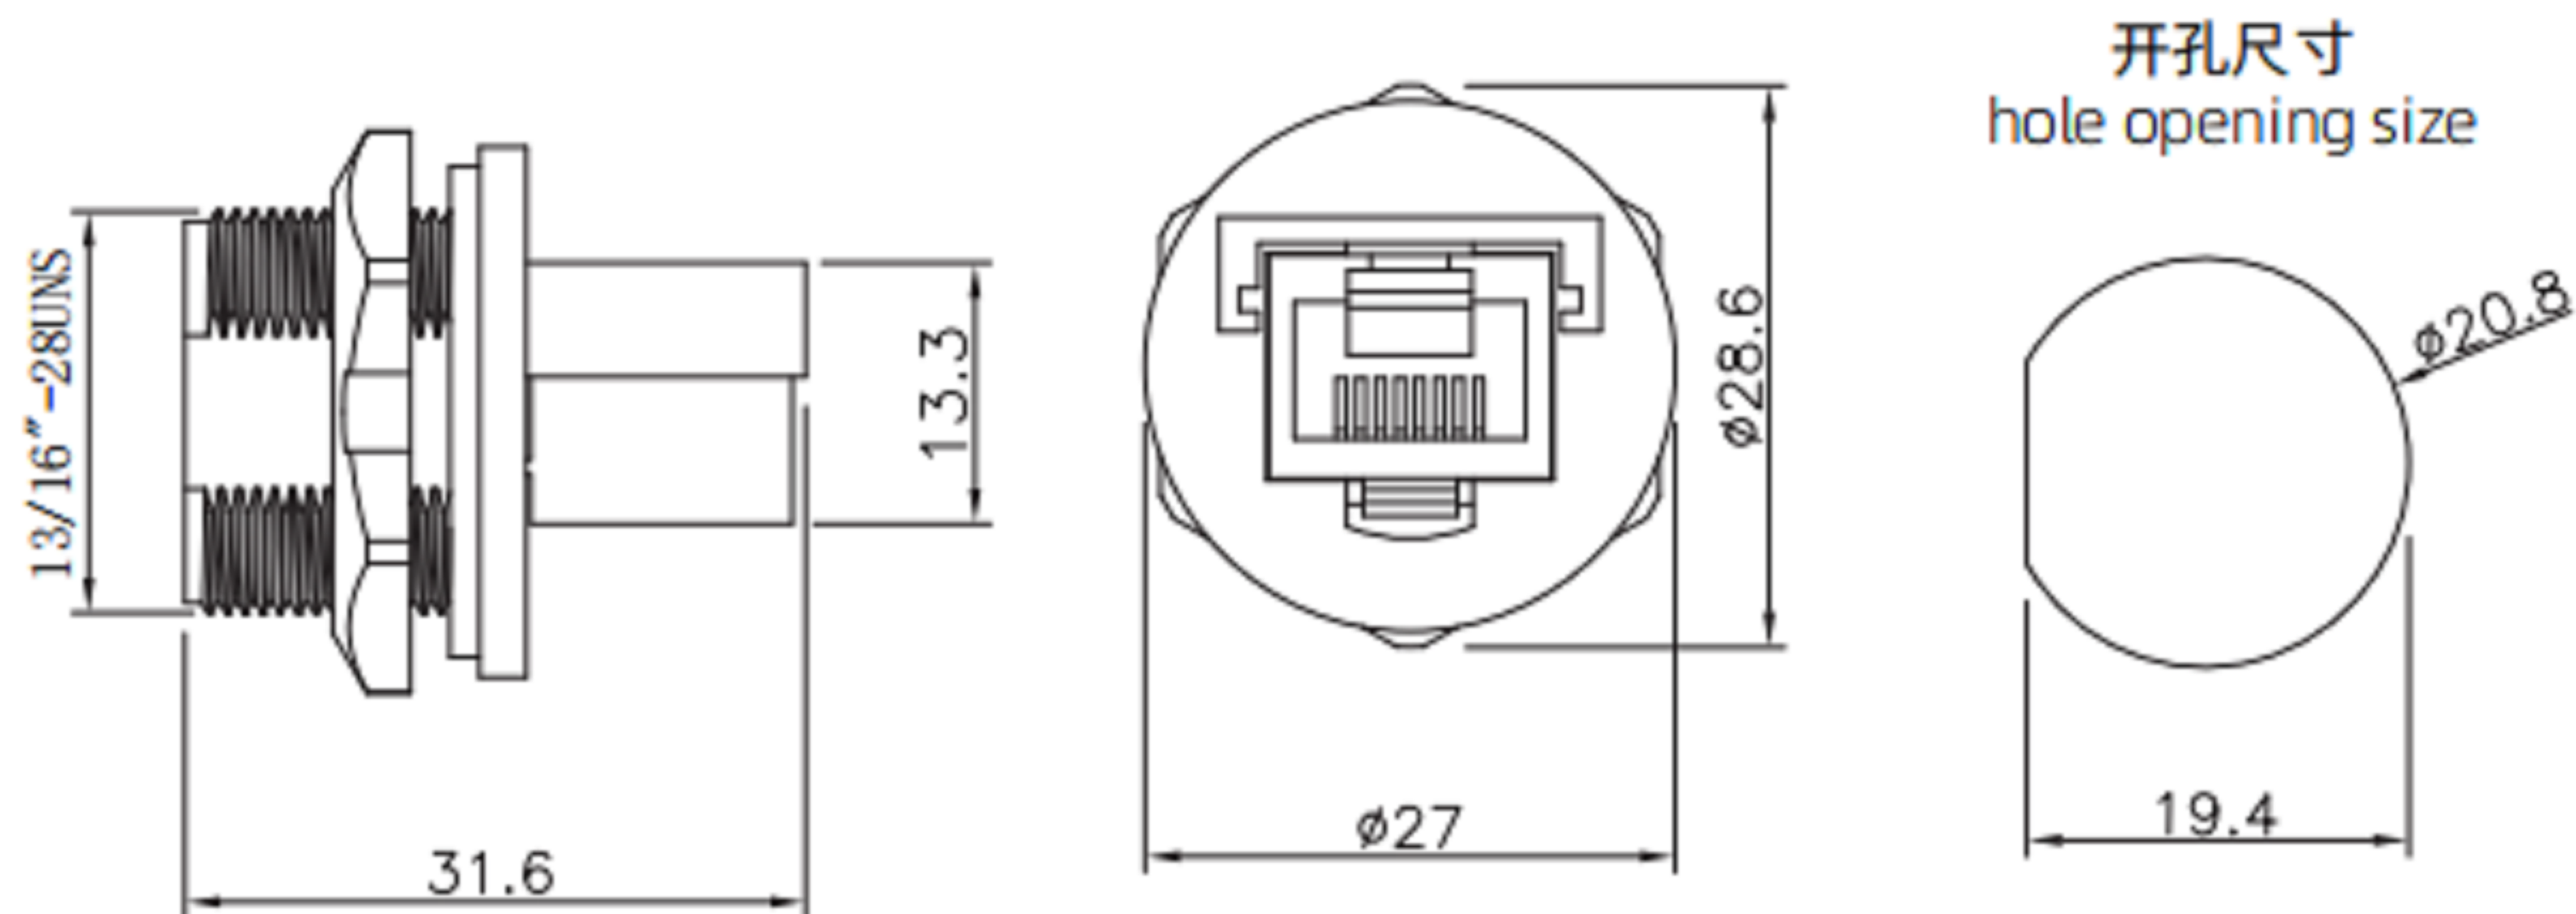

产品参数 PRODUCT PARAMETERS

|                          |                                                                               |                                |               |
|--------------------------|-------------------------------------------------------------------------------|--------------------------------|---------------|
| 壳体材料<br>Shell material   | 热塑性塑料PA66 阻燃等级: V-0<br>Thermoplastic plastic PA66, flame retardant grade: V-0 | 接触阻抗<br>Contact impedance      | ≤5mΩ          |
| 密封材料<br>Sealing material | 环氧树脂/橡胶<br>Epoxy resin/Rubber                                                 | 插拔次数<br>Durability             | ≥750次(Cycles) |
| 插针材料<br>Contact material | 磷铜镀金<br>Phosphorus copper gold-plated                                         | 适用温度<br>Applicable temperature | -30℃ ~ +105℃  |
| 符合标准<br>Conform standard | CAT5e, CAT6a                                                                  | 接线范围<br>Wiring range           | 5.5mm~7.0mm   |

東莞市高迪电子有限公司  
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :  
Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°  
3RD. ANGEL'S  
UNITS MM

|              |          |           |        |          |                         |
|--------------|----------|-----------|--------|----------|-------------------------|
| DRAWN BY:    | DATE     | MAT'L     |        | TITLE    | CONNECTOR               |
| Jack Lu      | 12/13/19 | FINISH    |        | MODLE    | E13T - F R6 - PRF - 180 |
| CHECKED BY:  | DATE     | SCALE     | 1 : 1  | DWG NO.  |                         |
| Jacky Chen   | 12/13/19 | SHEET NO. | 1 of 1 | PART NO. |                         |
| APPROVED BY: | DATE     |           |        |          |                         |
| Tony Kao     | 12/13/19 |           |        |          |                         |