




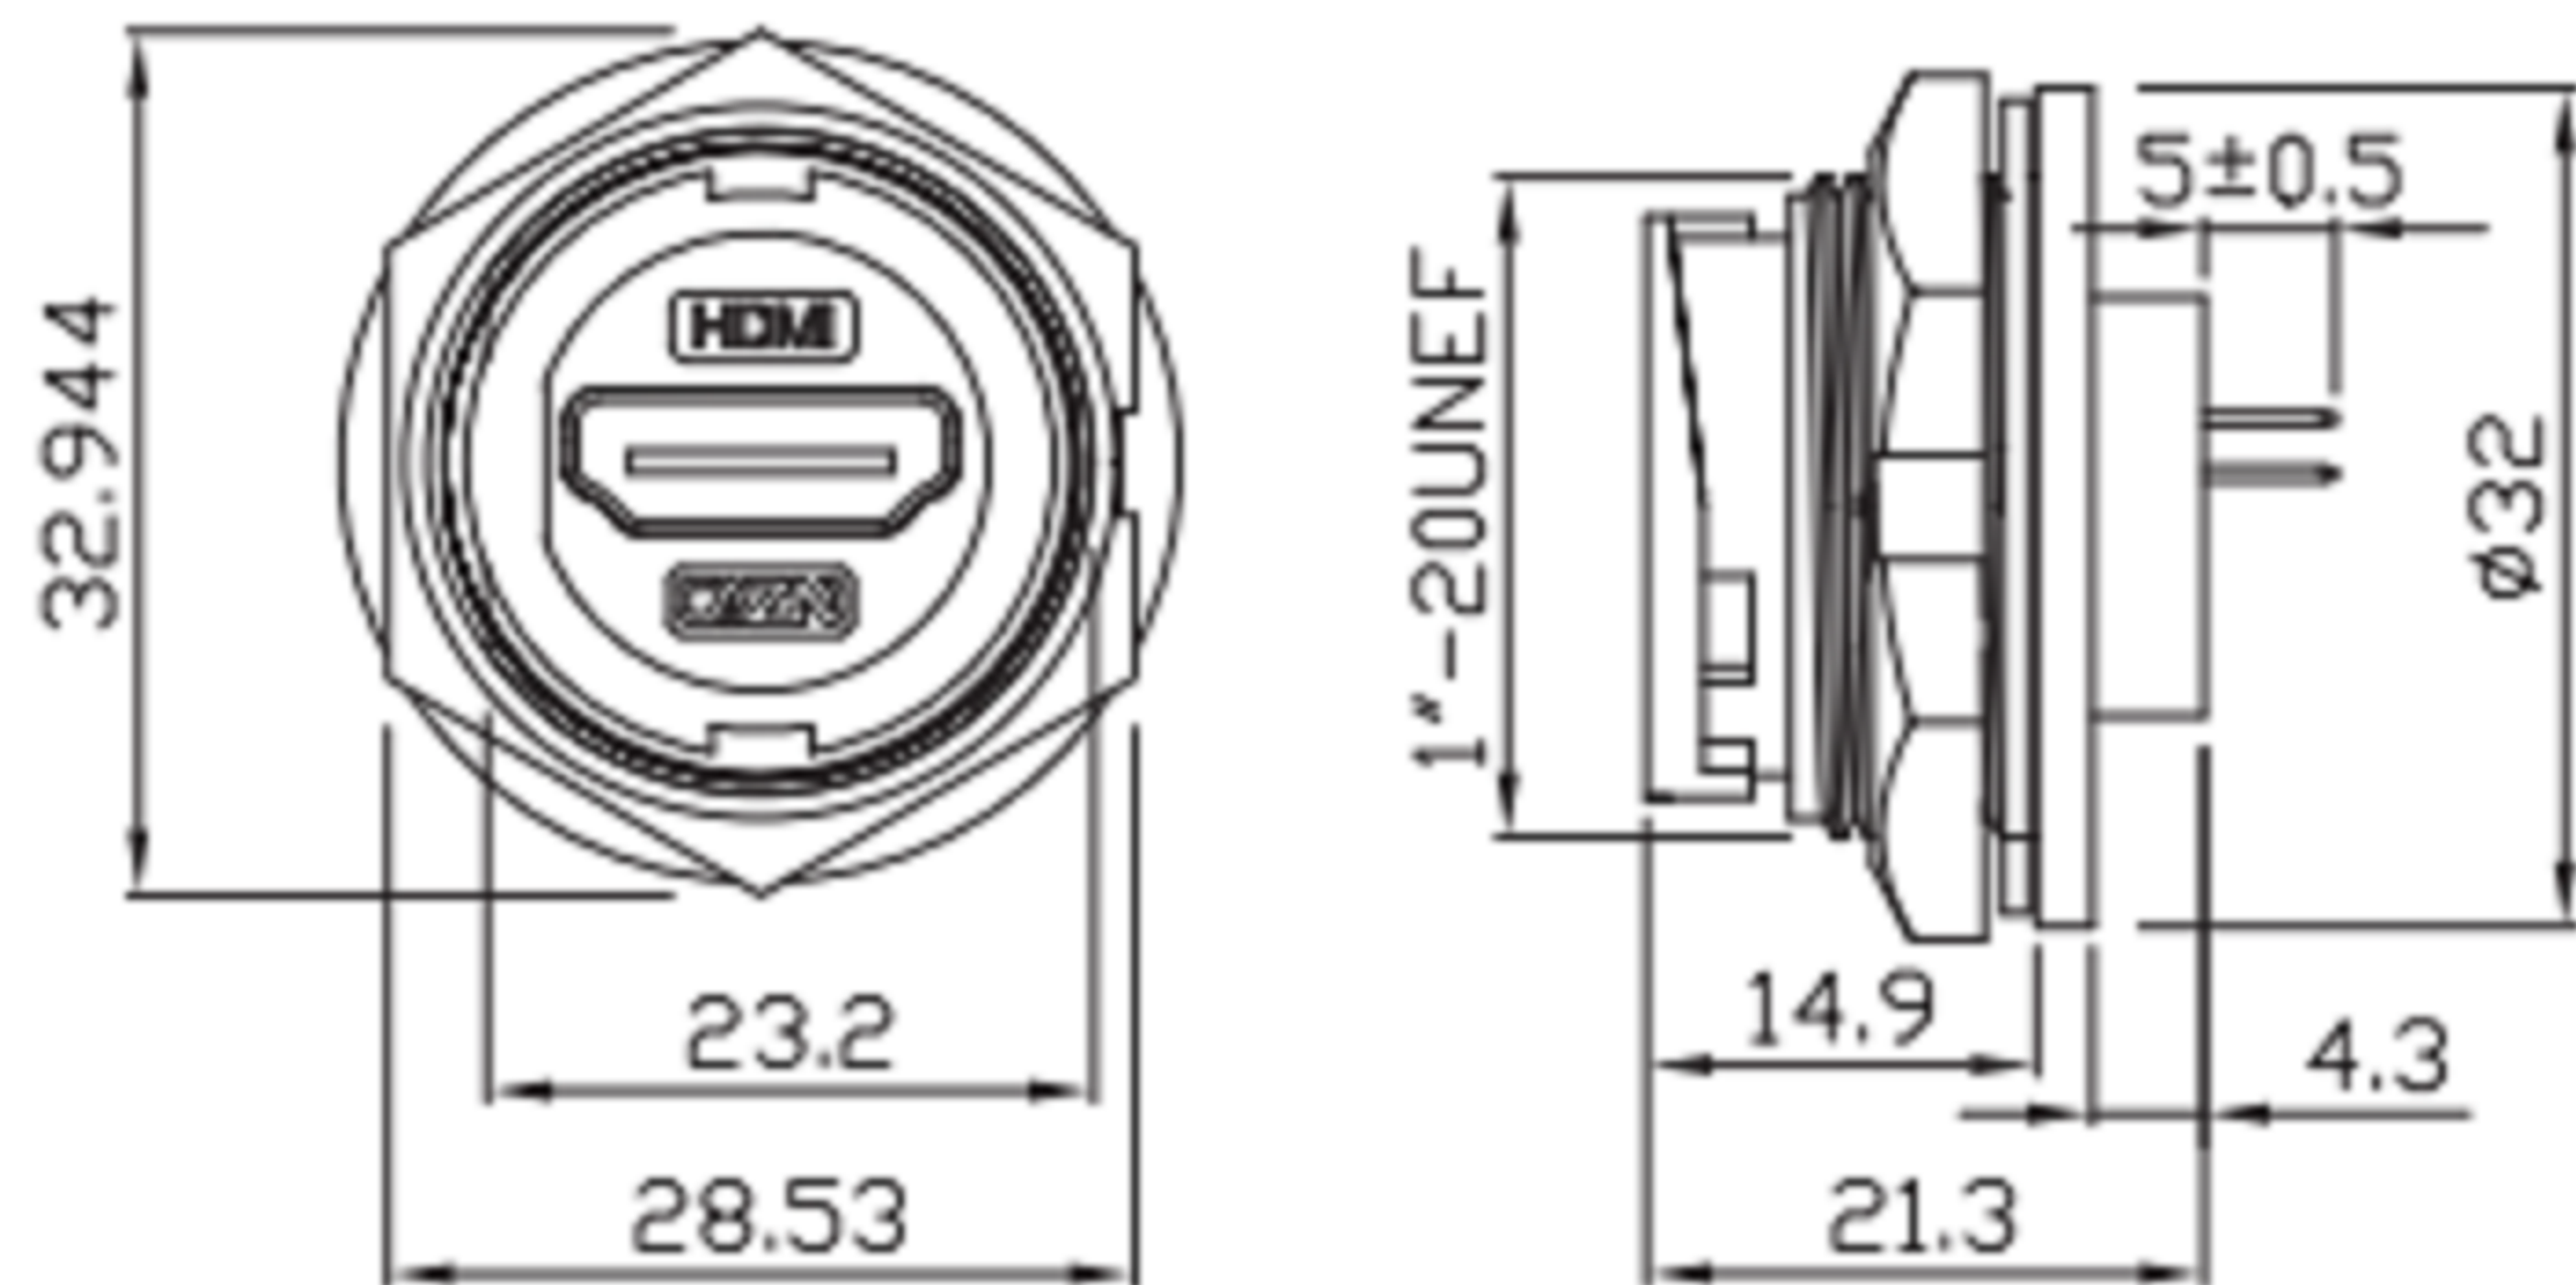

开孔尺寸
hole opening size

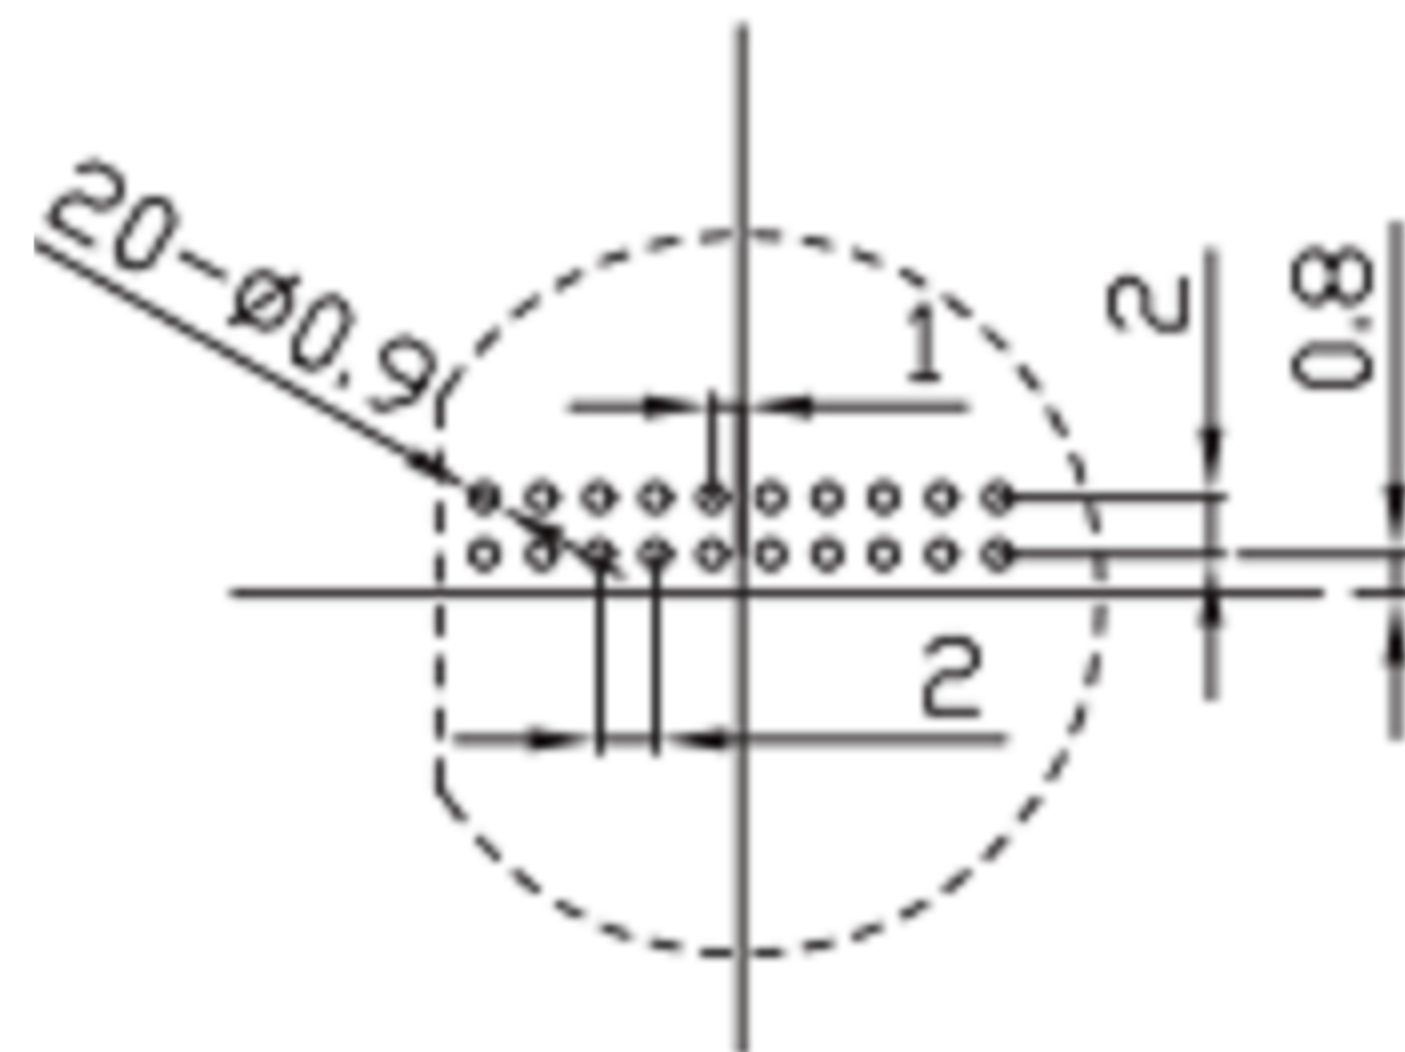

P.C.B板开孔尺寸

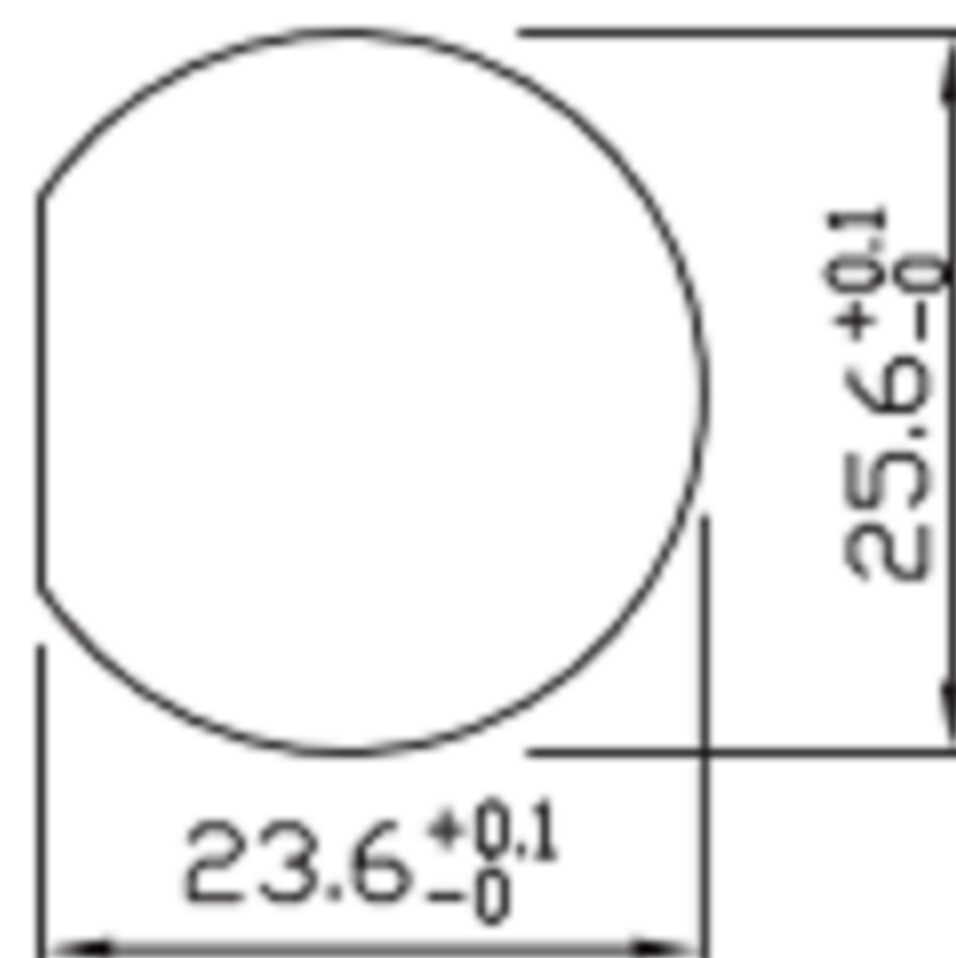

E16HDMI 母板后PCB插座(卡扣式)
E16HDMI Female Back Mount PCB Receptacle(Bayonet)

E16B - F H4 - PPF

产品参数 PRODUCT PARAMETERS

塑料材料 Plastic Material	PA66, 尼龙, 增强尼龙, 硅胶 PA66, Nylon, Reinforced Nylon, Silicone	绝缘电阻 Insulation resistance	≥100 mΩ DC500V
金属材料 Metal Material	铜镀金 Copper gold-plated	接触电阻 Contact resistance	30 mΩ
连接方式 Coupling	螺纹锁紧(T);卡扣锁紧(B) Thread (T); Bayonet(B)	适用温度 Applicable temperature	-40°C ~ +105°C
接线方式 Termination way	焊接、焊板 Solder, Welding plate	额定电流 Rated current	50 mA
插拔次数 Durability	≥500次(Cycles)	防水等级 Waterproof grade	IP67

東莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°
3RD. ANGEL'S
UNITS
MM

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	12/13/19	FINISH		MODLE	E16B - F H4 - PPF
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	
Jacky Chen	12/13/19	SHEET NO.	1 of 1	PART NO.	
APPROVED BY:	DATE				
Tony Kao	12/13/19				