
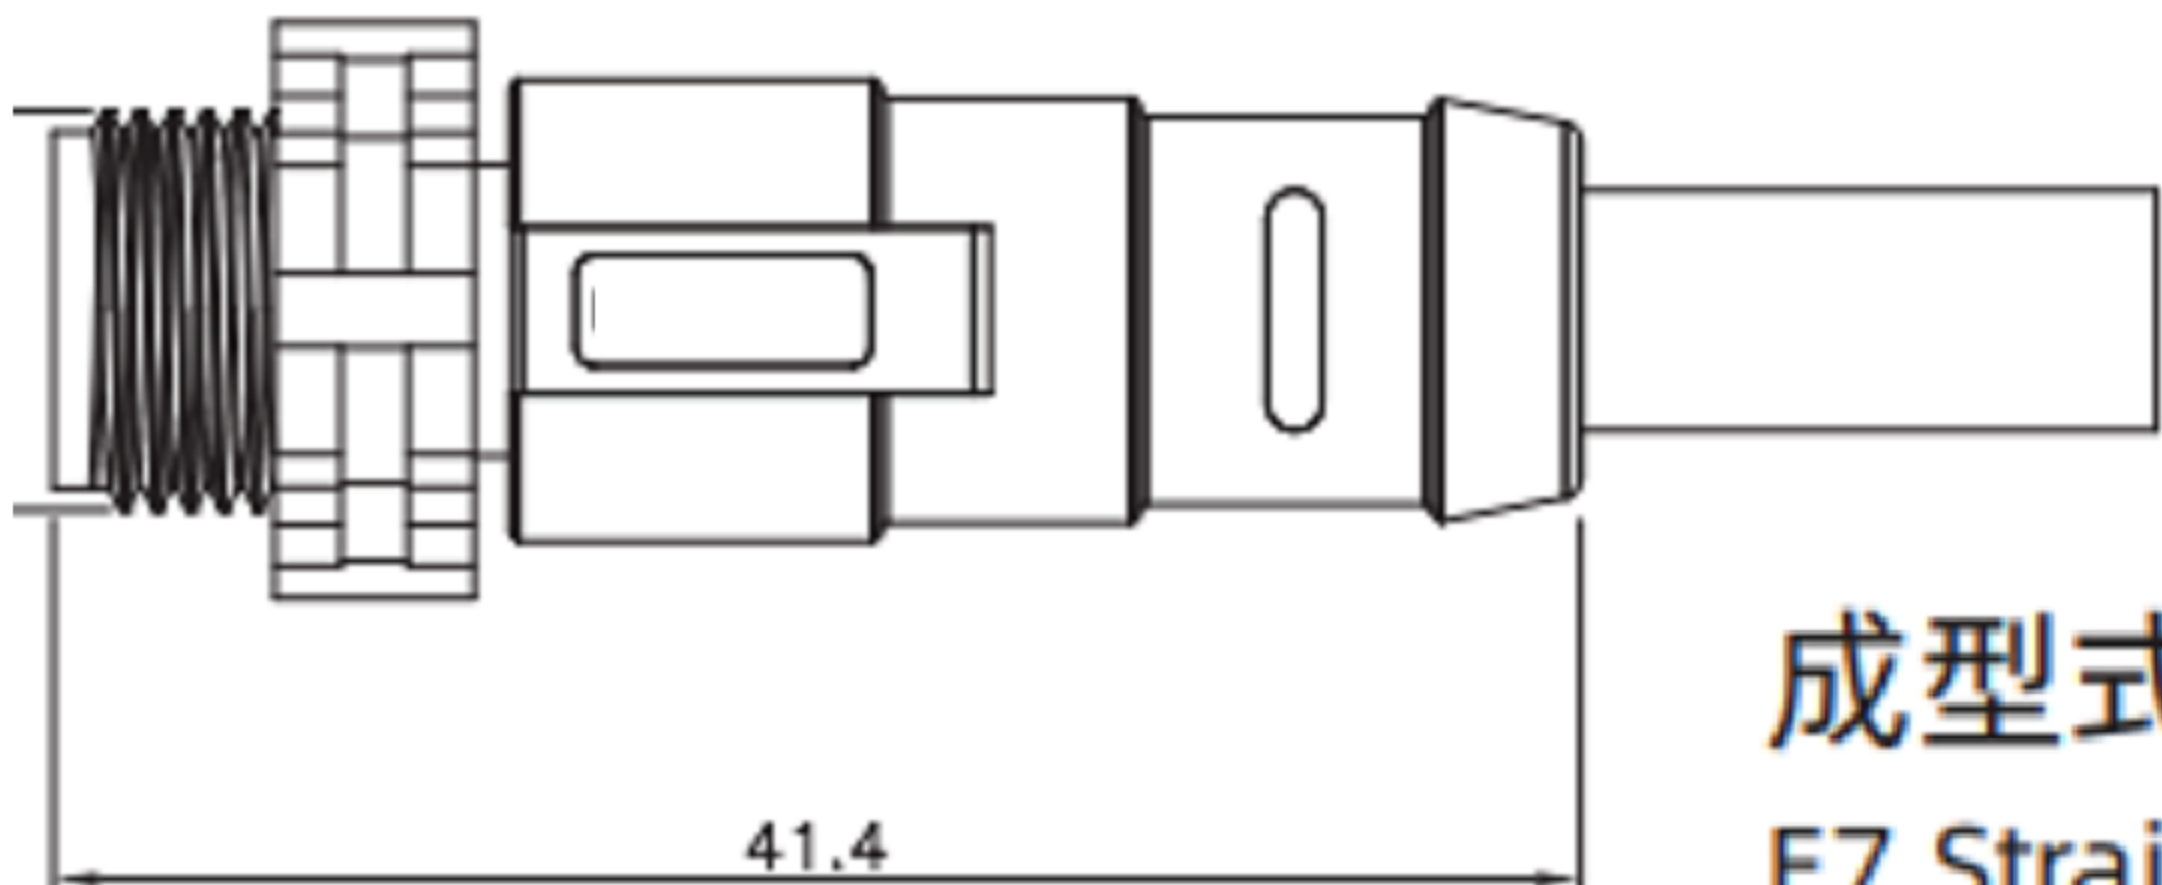


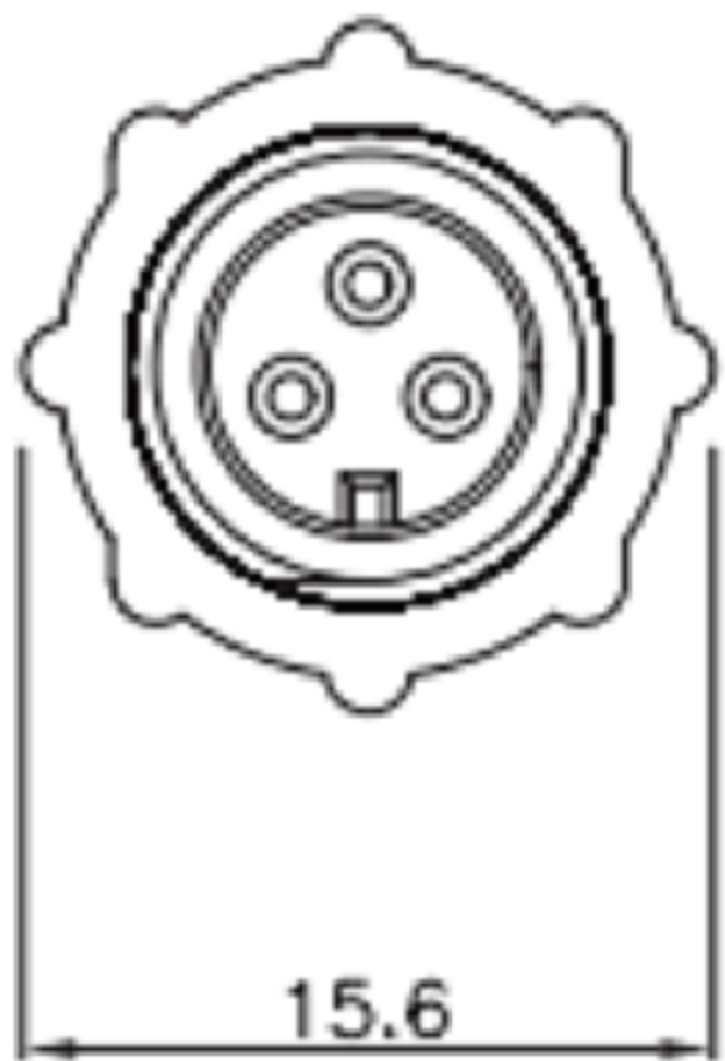

成型式针型直式对接插头(螺纹式)
E7 Straight Male Overmolded Mating Plug(Threaded)

E7T - P 3 - MWK - 1 PV

芯数:
2 3 4 5 6



线长(M):
1:1M
2.5:2.5M
.....
线材:
PV:PVC
PU:PU



E7·PCB芯位图 E7 PCB Pins Arrangement

芯数 Pins	2	3	4	5	6
芯位图 Pins arrangement					

E7·电气参数 E7 ELECTRICAL PARAMETERS

芯数排列及技术参数 PINS ARRANGEMENT & TECHNICAL PARAMETERS					
芯数 Pins	2	3	4	5	6
芯位排布 Pins arrangement					
规格 SPECIFICATIONS					
芯数 Pins	2	3	4	5	6
线规 Wire gauge	0.519mm ² (20AWG)			0.34mm ² (20AWG)	
引脚类型 Pin type	φ1.0mm			φ0.8mm	
接线范围 Wiring range	3.5mm~6.8mm				
防水等级 Waterproof grade	IP67/IP68				
插拔次数 Durability	500				
适应温度 Applicable temperature	-45℃~105℃				
额定电压 Rated voltage	125V	125V	60V	60V	60V
额定电流 Rated current	5A	5A	2A	2A	2A




东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Jack Lu 12/13/19

CHECKED BY: DATE

Jacky Chen 12/13/19

APPROVED BY: DATE

Tony Kao 12/13/19

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

E7T - P 3 - MWK - 1 PV

SIZE

A4

VER

R1