

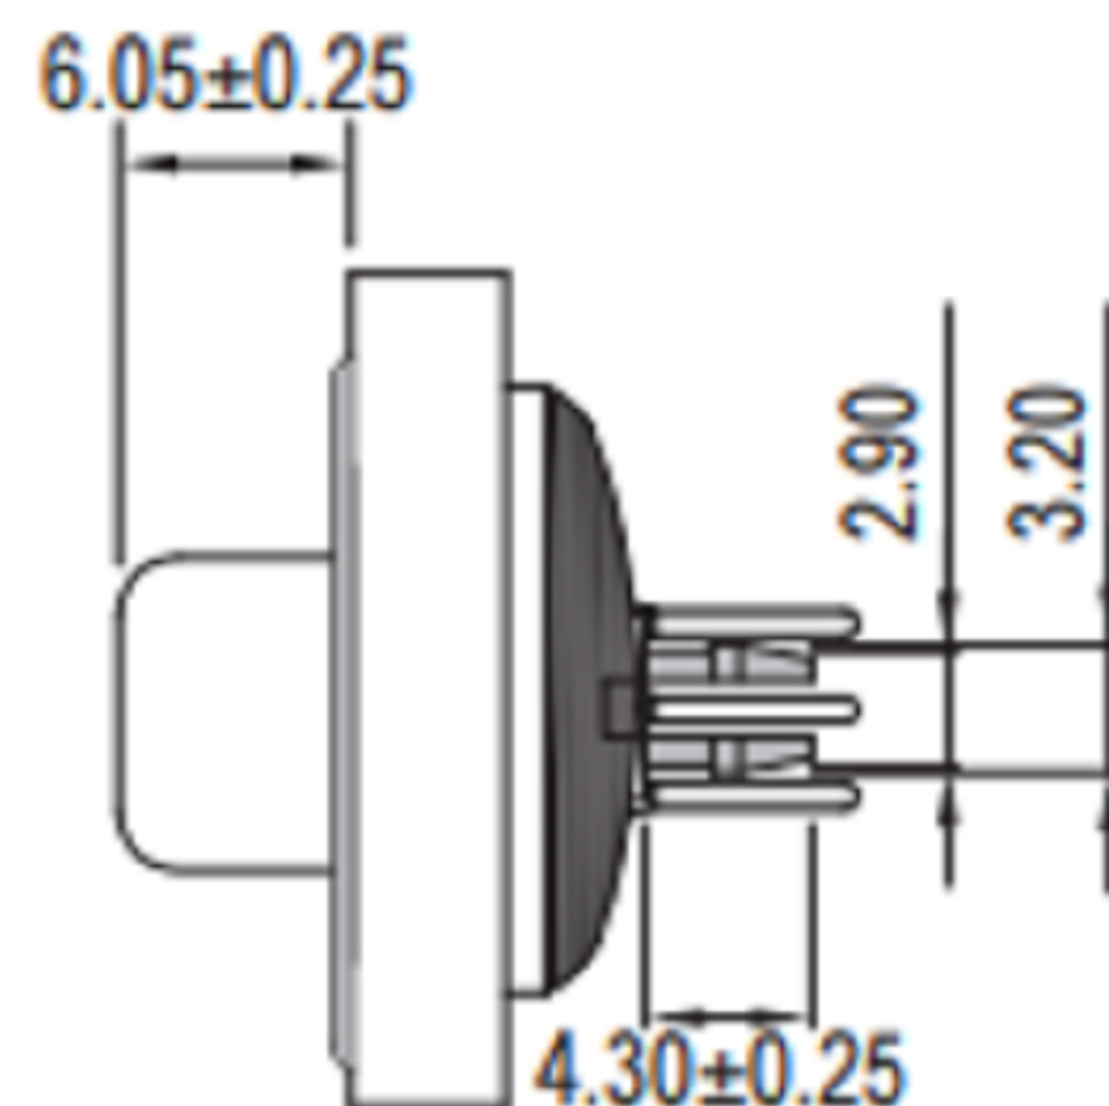


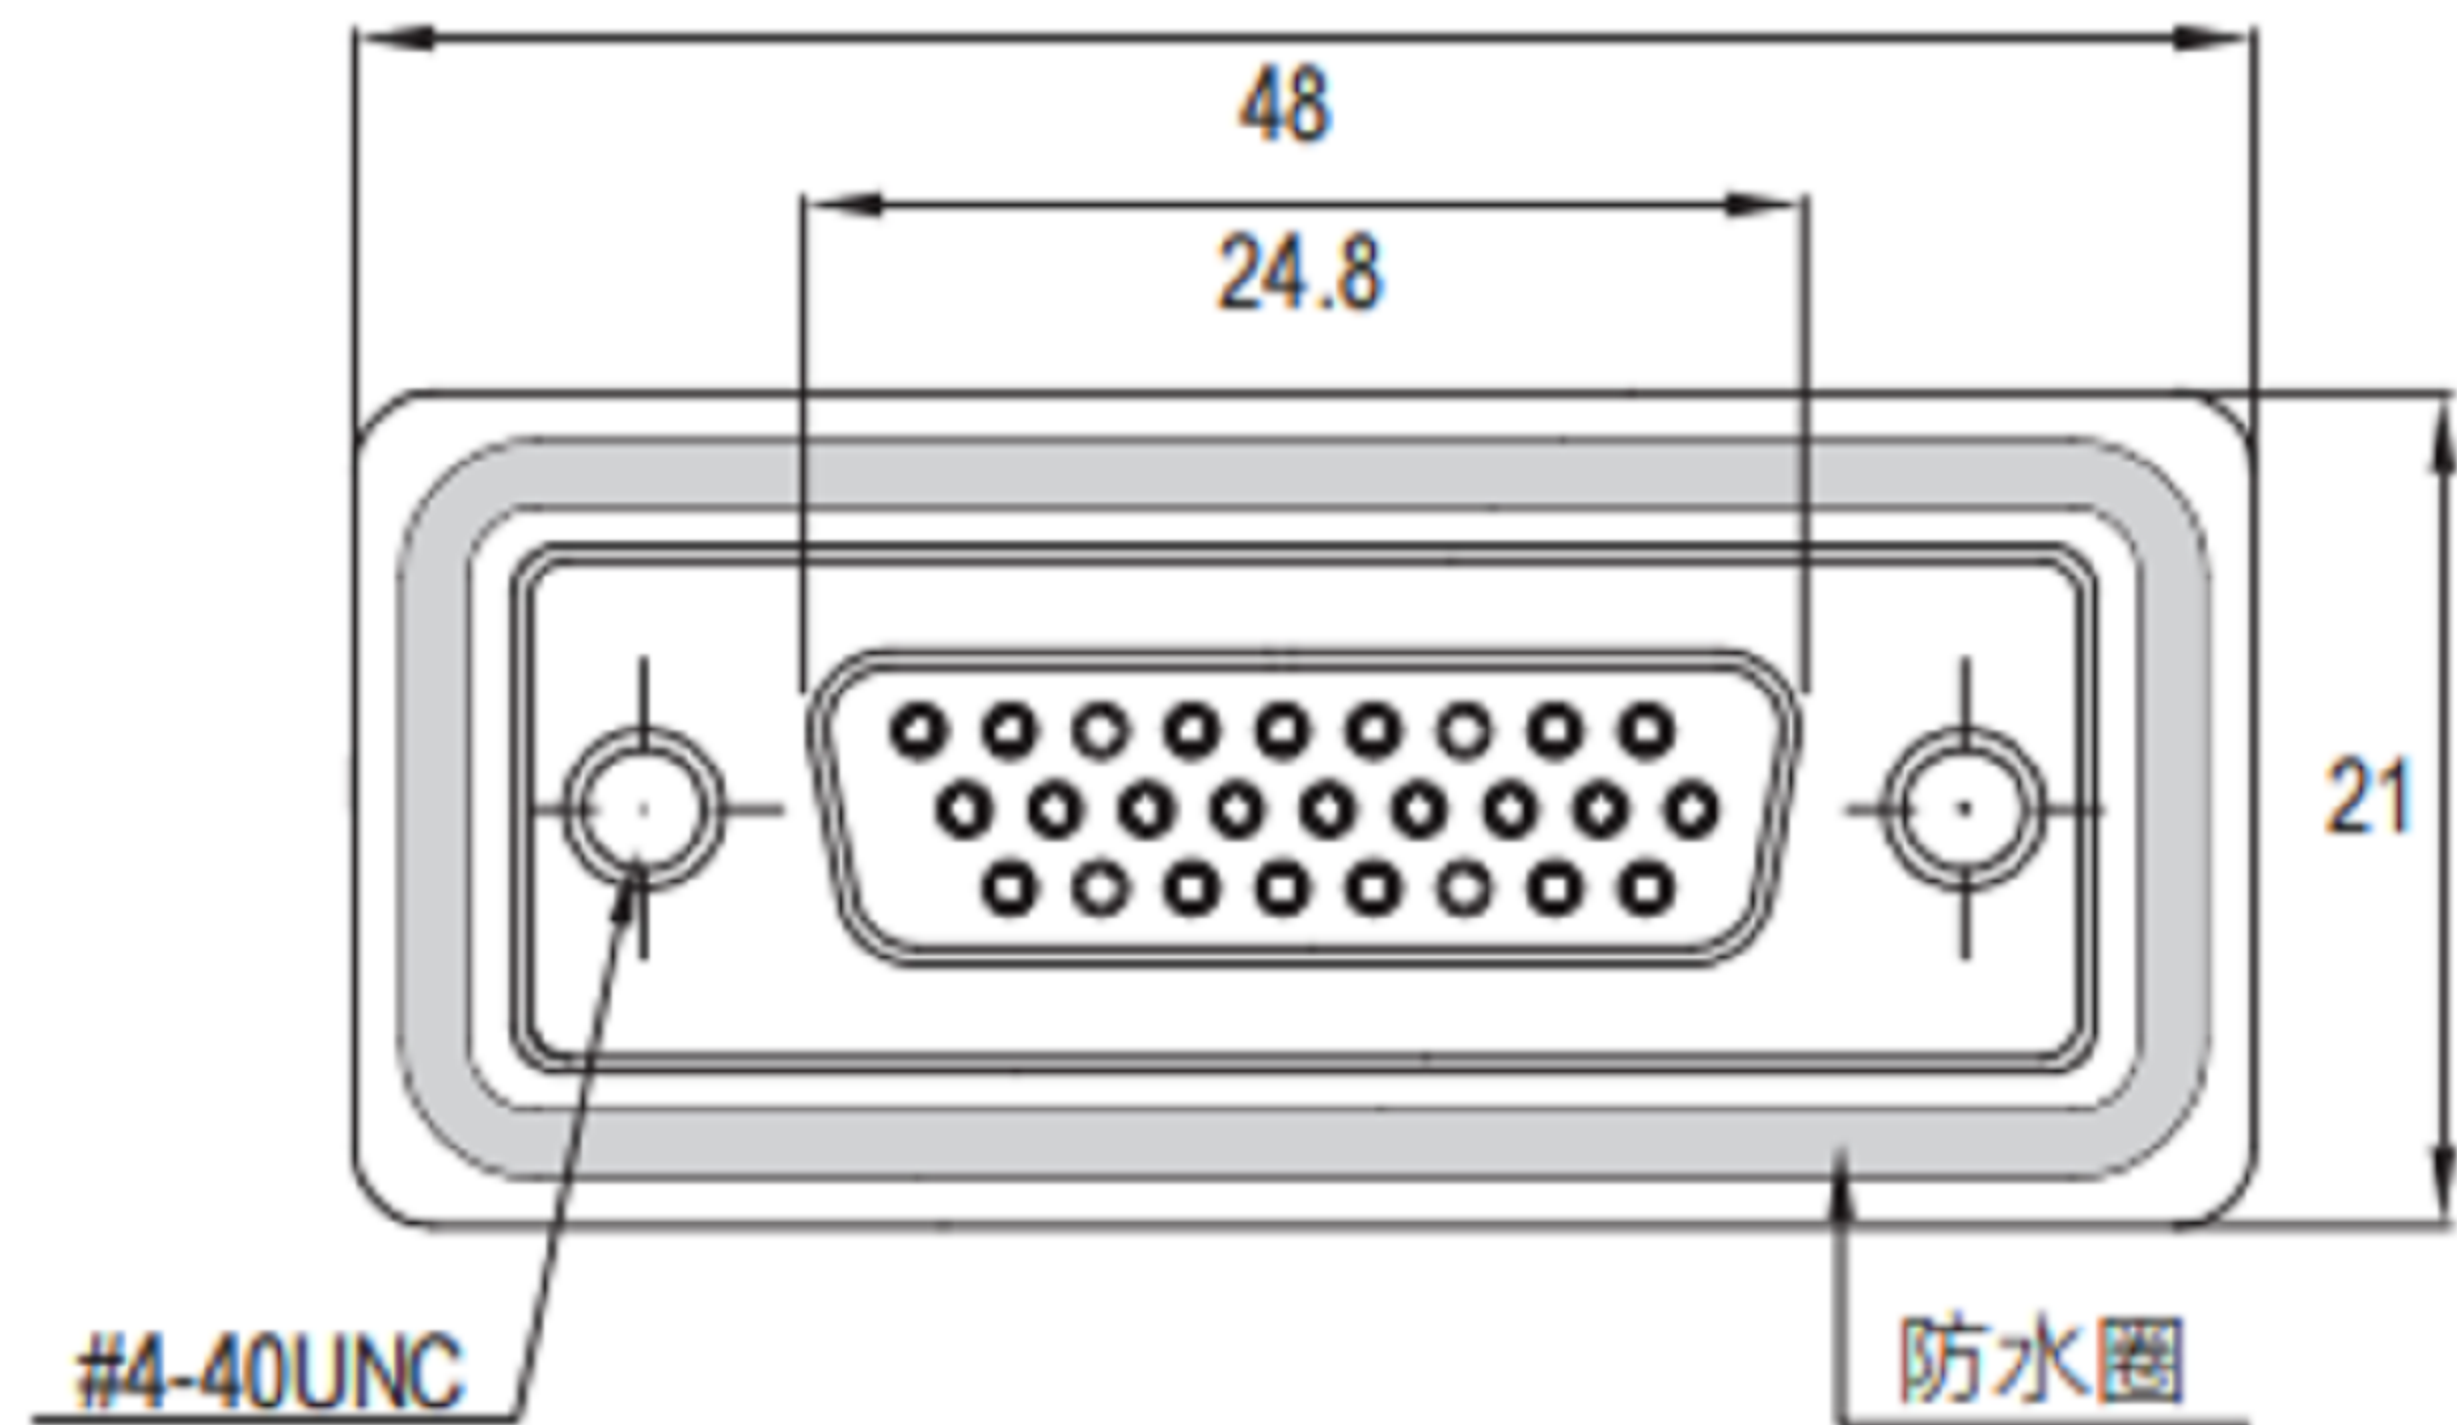

直式孔型插座(焊板式, 定位柱)
EDB2 Straight Female Socket(PCB, Peg)
EDB2 - F 15 - PPA 14 -DW

芯数:
15
26H
3W3
3W3C
7W2
11W1

大针线规:
14:14AWG
10:10AWG
08:8AWG
06:6AWG(默认)
空:小针

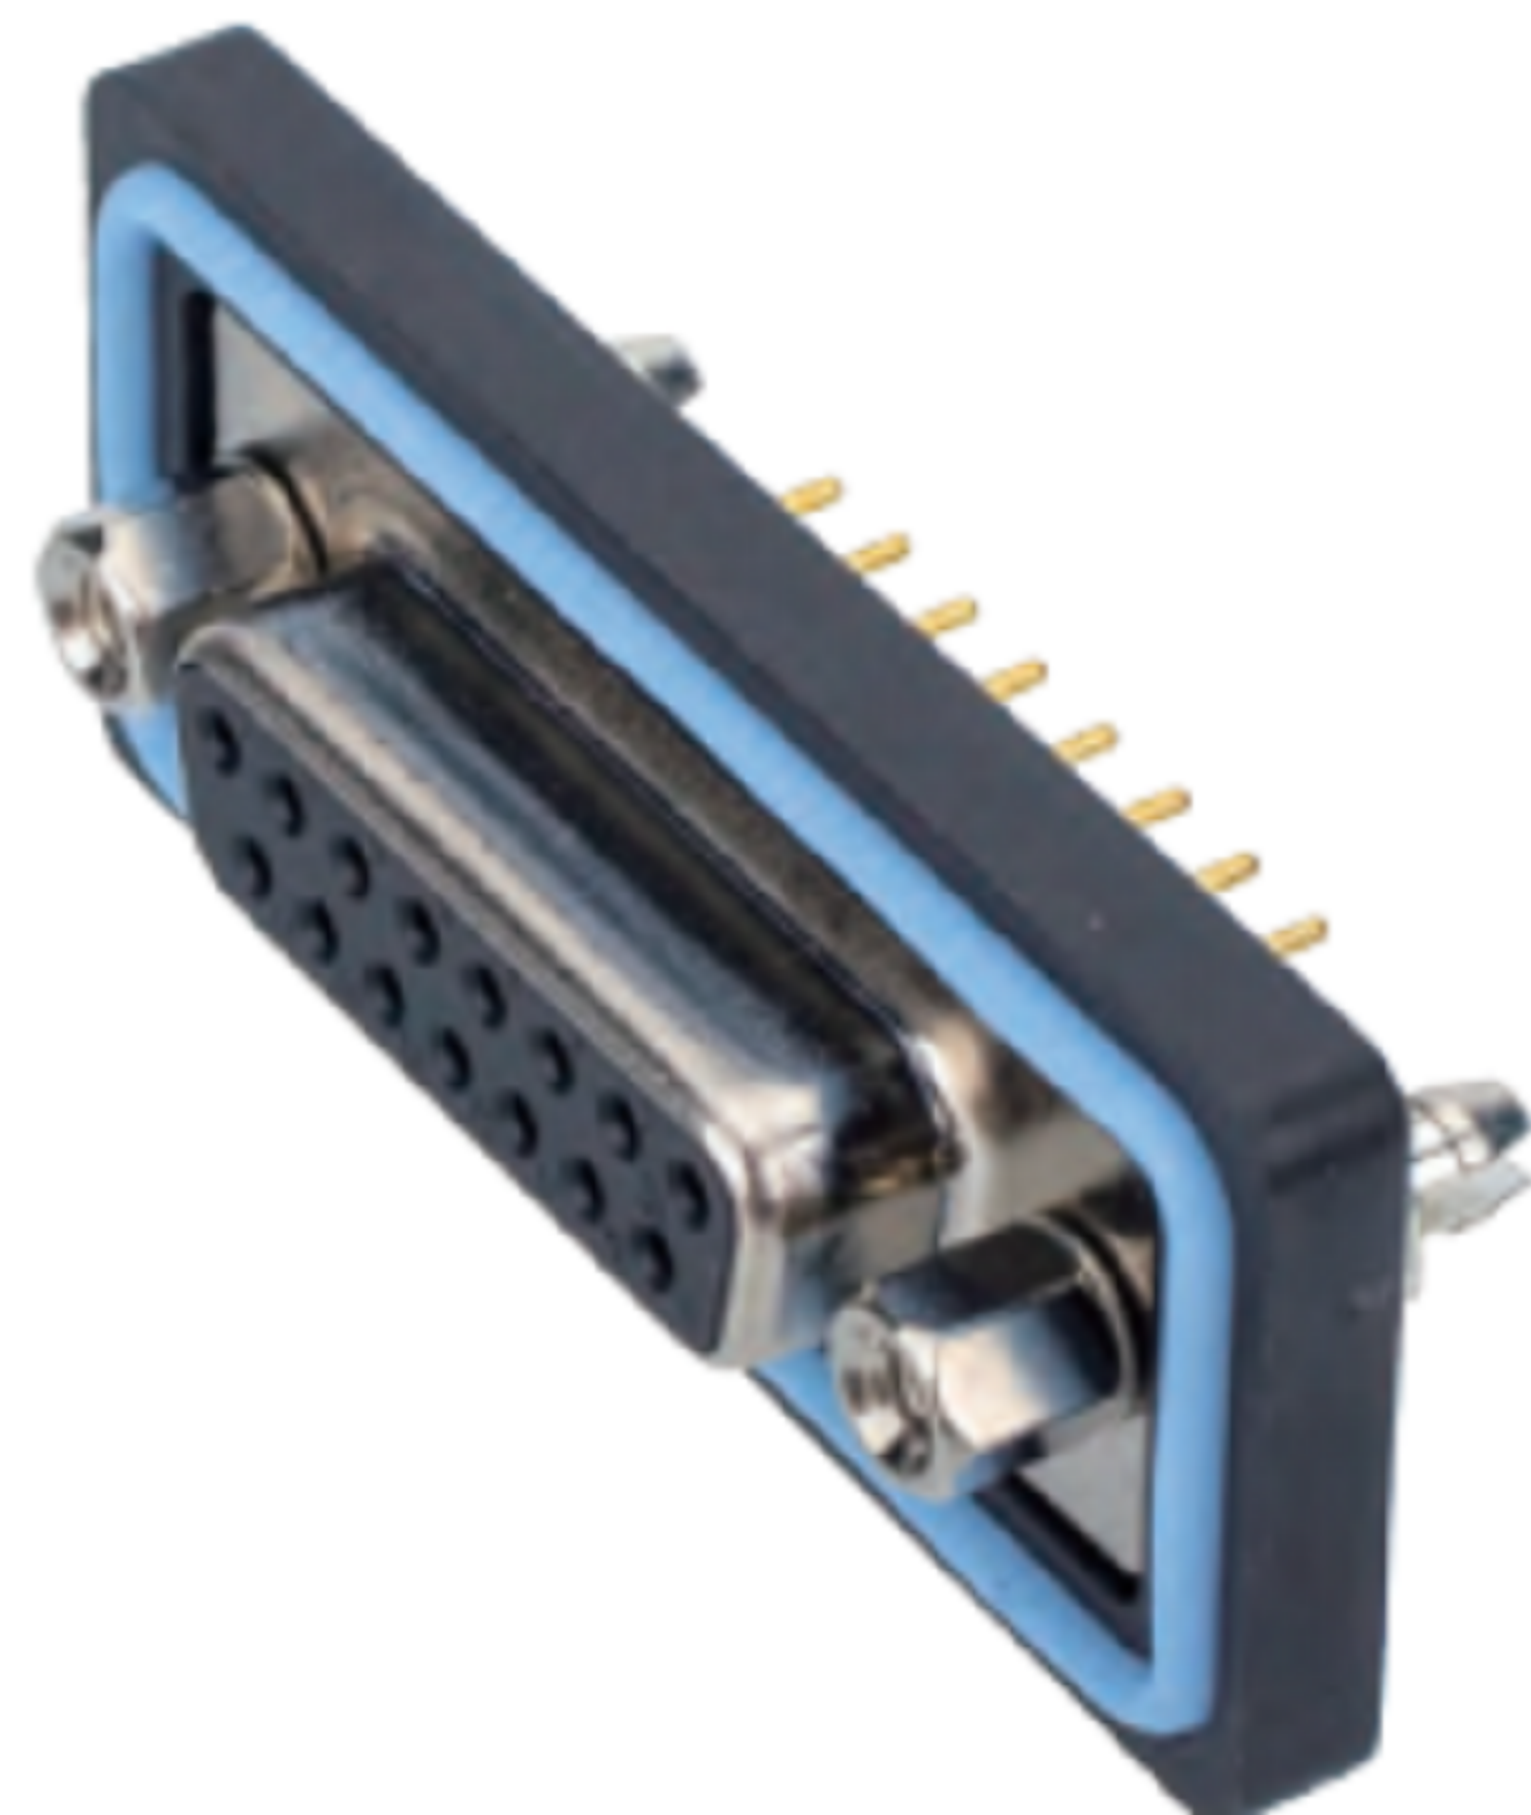

产品参数 PRODUCT PARAMETERS

额定电流 Rated current	10A/20A/30A/40A	插拔力 Plug and unplug force	符合IEC60807-3
额定电压 Rated voltage	1000 V	接线范围 Wire bound	8mm~14mm
耐电压 Withstand Voltage	500 V	插拔次数 Durability	≥500次(Cycles)
绝缘阻抗 Insulation resistance	5000 MΩ	适用温度 Applicable temperature	-55℃ ~ +105℃
接触阻抗 Contact resistance	10 mΩ	防水等级 Waterproof grade	IP65/IP67

 东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°
3RD. ANGEL'S
UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	12/13/19	FINISH	MODLE	EDB2 - F 15 - PPA 14 -DW
CHECKED BY:	DATE	SCALE	DWG NO.	SIZE
Jacky Chen	12/13/19	1 : 1	PART NO.	A4
APPROVED BY:	DATE	SHEET NO.		VER
Tony Kao	12/13/19	1 of 1		R1